

# DUOMO 7 (DU-30136-1-1)



## Product description

Medium - Swept shade - Dome top




microPrim™


## Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible for DUOMO 6, DUOMO 7

## Product colour

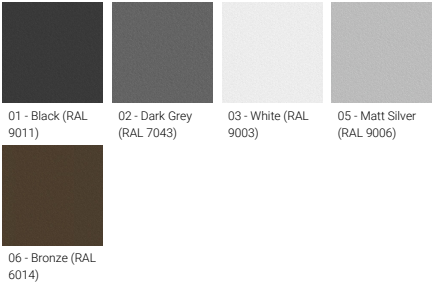

## Special finishes upon request

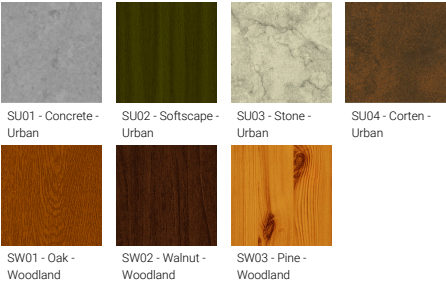

## DUOMO 7 (DU-30136-1-1)

### Technical information

|                      |                       |                          |                          |                                 |                                                                                                                                                                      |
|----------------------|-----------------------|--------------------------|--------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>      | Aluminium             | <b>Optic</b>             | G                        | <b>Product colours</b>          | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Light source</b>  | 1 COB                 | <b>Optic value</b>       | 128°                     | <b>Weight</b>                   | 9.2 kg                                                                                                                                                               |
| <b>Power</b>         | 41 W                  | <b>CCT / CRI</b>         | 3000K CRI80, 4000K CRI80 | <b>Operating temperature</b>    | -20 °C to 40 °C                                                                                                                                                      |
| <b>Lumen</b>         | 1635 - 1654 lm        | <b>Bug</b>               | B1-U3-G1                 | <b>Through wiring</b>           | Two cable entries for through wiring                                                                                                                                 |
| <b>Efficacy</b>      | 40 lm/W               | <b>ULR</b>               | 15%                      | <b>Lens / Reflector / Optic</b> | Opal toughened glass diffuser                                                                                                                                        |
| <b>Driver option</b> | Integral control gear | <b>ULOR</b>              | 15%                      | <b>MacAdam Ellipse</b>          | 3 SDCM                                                                                                                                                               |
| <b>Driver</b>        | Constant current (CC) | <b>CIE flux code n°3</b> | 87                       | <b>Lifetime L90B10 (hours)</b>  | > 55,000                                                                                                                                                             |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    | <b>Dimming type</b>      | On/Off, 1-10V, DALI      | <b>Variants (1-10V, DALI)</b>   | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)                                                      |

### DU-30136-1-1

