

ALDO 5 (ALD-30244) (Version 3)



Product description

Without remote driver - Constant voltage (CV) 24 V - 18x45 mm - 1025 mm - Class III - IK07 - RGBW




microPrim™


Luminaire Structure

- Powder coated aluminium alloy housing
- Adjustable aluminium extrusion bracket for ALD-30261, ALD-30262, ALD-30263, ALD-30264, ALD-30265, ALD-30266, ALD-30271, ALD-30272, ALD-30281, ALD-30282, ALD-30291, ALD-30292, ALD-30301, ALD-30302, ALD-30801
- Adjustable galvanised steel bracket for ALD-30241, ALD-30242, ALD-30243, ALD-30244, ALD-30251, ALD-30252, ALD-30253, ALD-30254, ALD-30255, ALD-30256
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.2 m of 5x0.75 sqmm outdoor cable
- Clear toughened glass
- Remote driver (not included)
- Uniform light distribution with uninterrupted end-to-end mounting.
- For ALD-30001 not included 24 VDC input, DMXRDM address with stable signal


Optic



Product colour

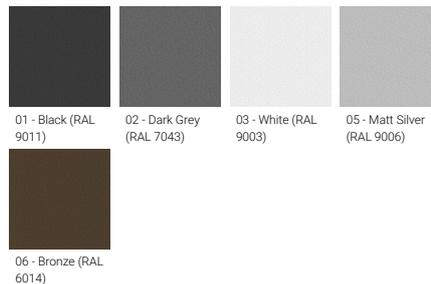

Special finishes upon request

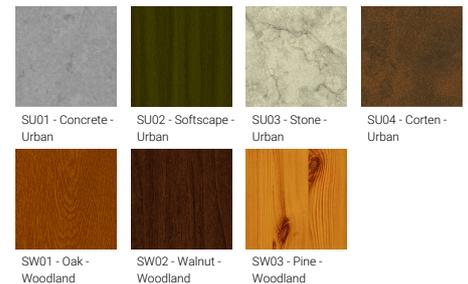


ALDO 5 (ALD-30244) (Version 3)

Technical information

| | |
|----------------------|------------------------------|
| Material | Aluminium |
| Light source | 60 LED |
| Power | 15 W |
| Lumen | 451 - 515 lm |
| Efficacy | 30 - 34 lm/W |
| Driver option | Remote driver (not included) |
| Driver | Constant voltage (CV) |
| Input voltage | 24 VDC |

| | |
|--------------------------|----------------|
| Optic | VW, EW |
| Optic value | 67°, 93° |
| CCT / CRI | RGBW30, RGBW40 |
| Bug | B1-U0-G0 |
| ULR | <1% |
| ULOR | <1% |
| CIE flux code n°3 | 98, 99 |
| Dimming type | DMX, DMX/RDM |

| | |
|---------------------------------|--|
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 0.4 kg |
| Operating temperature | -20 °C to 40 °C |
| Cable | Two IP67 connectors supplied with 2x0.2 m of 5x0.75 sqmm outdoor cable |
| Through wiring | Two cable entries for through wiring |
| Lens / Reflector / Optic | Clear toughened glass |
| MacAdam Ellipse | 7 SDCM |
| Lifetime L80B50 (hours) | > 50,000 |

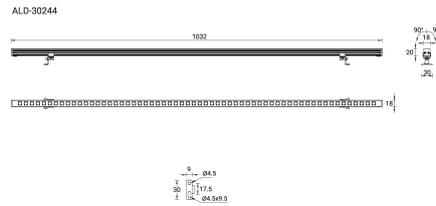

ALDO 5 (ALD-30244) (Version 3)**Accessory**

DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND