

ARDEN 3 (ARD-80204)



Product description

Down - 315 mm - RGBW



microPrim™


Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Down light distribution only

- Wireless control available through Bluetooth connection
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)


Optic



Product colour



Special finishes upon request

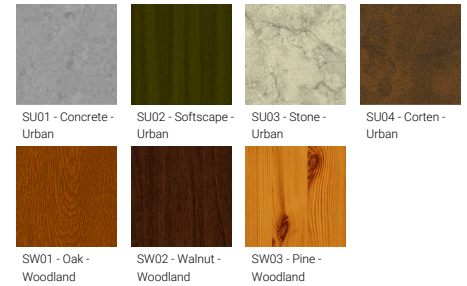


ARDEN 3 (ARD-80204)


Technical information

Material	Aluminium	Driver	Constant current (CC)	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	672 LED	Input voltage	220-240 V 50/60 Hz	Weight	2.8 kg
Power	34 W	Optic	O, P	Operating temperature	-20 °C to 40 °C
Lumen	635 lm	Optic value	108°, 93°	Lens / Reflector / Optic	PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
Efficacy	19 lm/W	CCT / CRI	RGBW40	Variants (Bluetooth)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver option	Integral control gear	Dimming type	Bluetooth		


ARD-80204

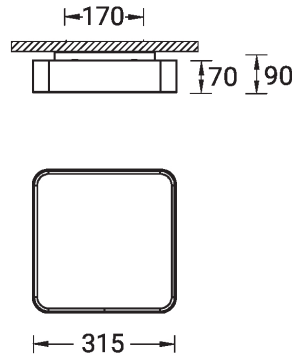


ARDEN 3 (ARD-80204)**Accessory**



Decorative pattern - Type A for
ARDEN 300 mm
A91421



Decorative pattern - Type B for
ARDEN 300 mm
A92821



Decorative pattern - Type C for
ARDEN for ARDEN 300 mm
A94221



Xpress wireless switch
A90591



DALI Control System
Control-DALI
