

LIGHTALK 2 (LA-60014)



Product description


With recessing box - Integral control gear - 1250 mm - Class I - RGBW



Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- 24 VDC input, DMX/RDM address with stable signal

Optic

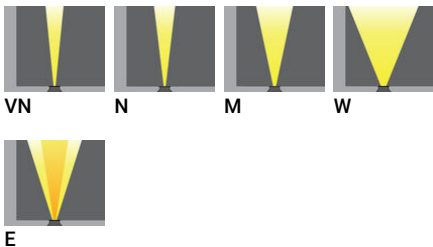

Product colour



LIGHTALK 2 (LA-60014)

Technical information

Material	Stainless Steel	Optic value	10°, 13°, 25°, 43°, 18° x35°	Cable	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
Light source	40 LED	CCT / CRI	RGBW30, RGBW40	Through wiring	Two cable entries for through wiring
Power	66 W	Bug	B0-U5-G0	Lens / Reflector / Optic	Clear toughened glass
Lumen	3302 - 3839 lm	ULR	100%	MacAdam Ellipse	7 SDCM
Efficacy	50 - 58 lm/W	ULOR	100%	Lifetime L90B10 (hours)	> 50,000
Driver option	Integral control gear	Dimming type	DMX, DMX/RDM	Lifetime L80B10 (hours)	> 68,000
Driver	Constant current (CC)	Product colours	Stainless Steel	Lifetime L80B50 (hours)	> 100,000
Input voltage	220-240 V 50/60 Hz	Weight	7.4 kg	Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	VN, N, M, W, E	Operating temperature	-20 °C to 40 °C		

LA-60014



LIGHTALK 2 (LA-60014)

Accessory



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM