


LEEDS 5 (LEE-30051)



Product description

Down (Optic) & Up (Optic 2nd) - Rectangular

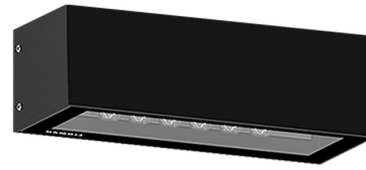


microPrim™

Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Optic

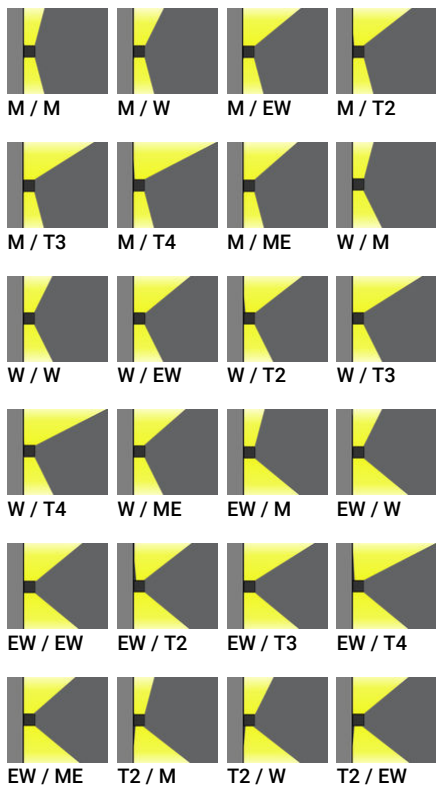

Product colour



Special finishes upon request

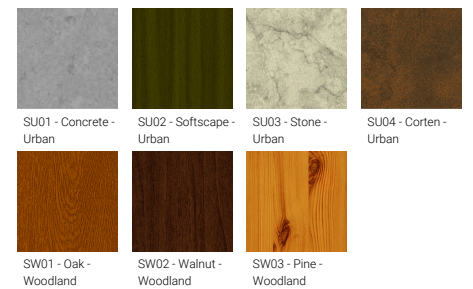

We reserve the right to make technical and design changes.

05:12, 16-03-2026

<https://www.ligman.com/leeds-5-lee-30051/>

THAILAND
 LIGMAN Lighting Co.,Ltd.
 17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com



LEEDS 5 (LEE-30051)



T2 / T2 T2 / T3 T2 / T4 T2 / ME



T3 / M T3 / W T3 / EW T3 / T2



T3 / T3 T3 / T4 T3 / ME T4 / M



T4 / W T4 / EW T4 / T2 T4 / T3



T4 / T4 T4 / ME ME / M ME / W



ME / EW ME / T2 ME / T3 ME / T4



ME / ME

LEEDS 5 (LEE-30051)


Technical information

| | |
|----------------------|--------------------------|
| Material | Aluminium |
| Light source | 12 & 12 LED |
| Power | 39 W |
| Lumen | 4090 - 4982 lm |
| Efficacy | 108 - 131 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | M, W, EW, T2, T3, T4, ME |

| | |
|--------------------------|--|
| Optic value | 30°, 56°, 103°x110°, 58°x137°, 67°x124°, 67°x108°, 62°x141° |
| Optic (2nd) | M, W, EW, T2, T3, T4, ME |
| Optic (2nd) value | 30°, 56°, 103°x110°, 58°x137°, 67°x124°, 67°x108°, 62°x141° |
| CCT / CRI | 2700K CRI80, 3000K CRI80, 4000K CRI80 |
| Bug | B1-U5-G0, B1-U5-G1, B2-U5-G0 |
| ULR | 47%, 48%, 49%, 50%, 51%, 52%, 53% |
| ULOR | 47%, 48%, 49%, 50%, 51%, 52%, 53% |
| Dimming type | On/Off, 1-10V, DALI |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |

| | |
|---------------------------------------|---|
| Weight | 2.0 kg |
| Operating temperature | -20 °C to 50 °C |
| Through wiring | Single cable entry, through wiring upon request |
| Lens / Reflector / Optic | Clear toughened glass, High-efficiency PMMA lens |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hours) | > 90,000 |
| Lifetime L80B10 (hours) | > 90,000 |
| Lifetime L80B50 (hours) | > 90,000 |
| Variants (On/Off, 1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

LEE-30051

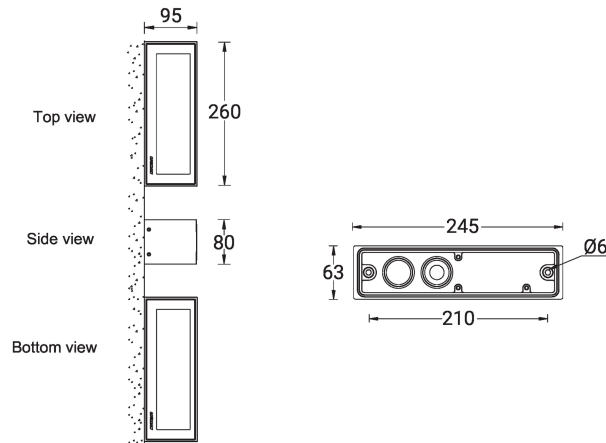

LEEDS 5 (LEE-30051)**Accessory**



Surface mounting box for easy
cabling (LEEDS 5)
SCE-LEEDS-5
