

EDINBURGH 11 (EDB-20001)



Product description

Supplied with specific 3 m cylindrical, straight aluminium pole: APD130070-EDINBURGH




microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Adjustable: Tilt 90° (Up) & 20° (Down), Rotation 350°
- Single cable entry, through wiring upon request
- One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear


Optic

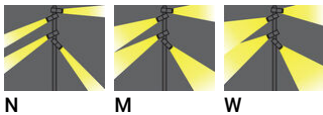

Product colour



Special finishes upon request

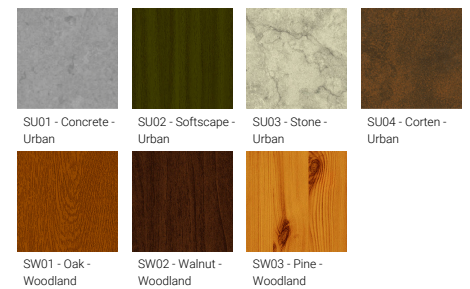


EDINBURGH 11 (EDB-20001)

Technical information


Material	Aluminium
Light source	4 x 3 LED
Power	32 W
Lumen	2528 - 3404 lm
Efficacy	79 - 106 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240V 50/60Hz
Optic	N, M, W

Optic value	24°, 30°, 47°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B1-U0-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	100
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	8.9 kg


Operating temperature	-20 °C to 50 °C
EPA (m2)	0.274
Cable	One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry, through wiring upon request
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 120,000
Lifetime L80B10 (hours)	> 120,000
Lifetime L80B50 (hours)	> 120,000

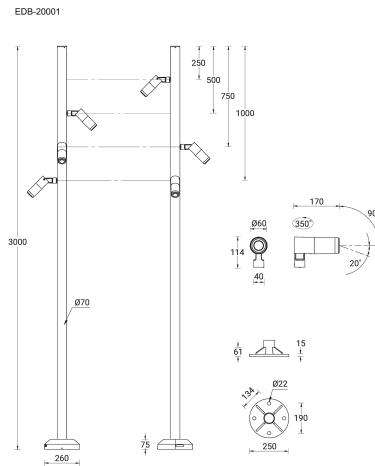

EDINBURGH 11 (EDB-20001)**Accessory**



Anti-glare visor
A55331

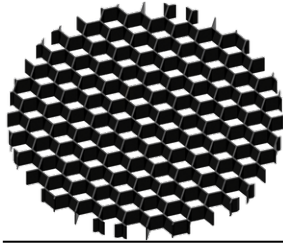

Honeycomb louvre
A57521



Root mount kit
A24391

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.

Pole (required)



3 m - Cylindrical, straight
aluminum pole for EDINGURGH
APD130070-EDINBURGH