

**SLIMSOFT 1 (SLI-10013)**



**Product description**

Ø102 - 1000 mm - With 180° light distribution



microPrim™



**Luminaire Structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear acrylic PMMA diffuser
- High-efficiency PMMA lens


- Integral control gear

**Optic**




G

**Product colour**

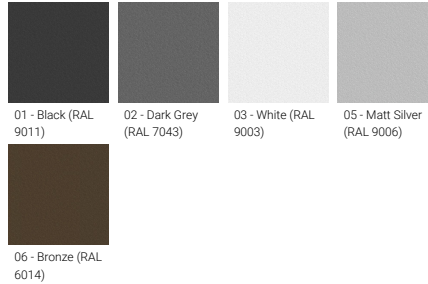

**Special finishes upon request**

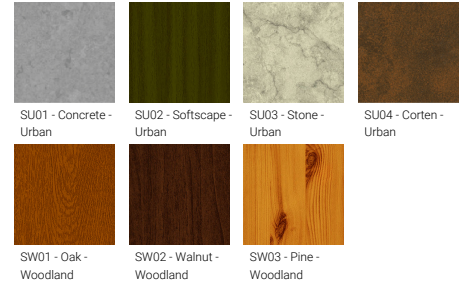

**SLIMSOFT 1 (SLI-10013)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	5 LED
<b>Power</b>	7 W
<b>Lumen</b>	165 - 180 lm
<b>Efficacy</b>	24 - 26 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)

<b>Input voltage</b>	220-240V 50/60Hz
<b>Optic</b>	G
<b>Optic value</b>	180°
<b>CCT / CRI</b>	2700K CRI80, 3000K CRI80, 4000K CRI80
<b>Bug</b>	B0-U1-G0
<b>ULR</b>	4%
<b>ULOR</b>	4%

<b>CIE flux code n°3</b>	92
<b>Dimming type</b>	On/Off, DALI
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	4.0 kg
<b>Operating temperature</b>	-20 °C to 50 °C
<b>Variants (DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

SLI-10013



**SLIMSOFT 1 (SLI-10013)**

**Accessory**

---



Anchor bolt  
**A10791**



DALI Control System  
**Control-DALI**