

GINO 5 (GI-10003)



Product description

102x304 mm - 1000 mm




microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear

Optic




T2 T3 T4

Product colour

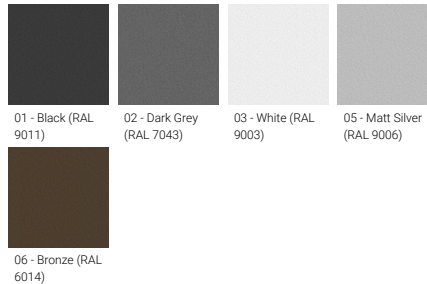

01 - Black (RAL 9011)
02 - Dark Grey (RAL 7043)
03 - White (RAL 9003)
05 - Matt Silver (RAL 9006)
06 - Bronze (RAL 6014)

Special finishes upon request

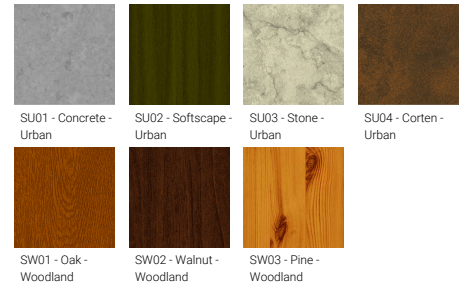

SU01 - Concrete - Urban
SU02 - Softscape - Urban
SU03 - Stone - Urban
SU04 - Corten - Urban
SW01 - Oak - Woodland
SW02 - Walnut - Woodland
SW03 - Pine - Woodland

GINO 5 (GI-10003)

Technical information

Material	Aluminium	Optic value	130°x41°, 108°x54°, 88°x61°	Operating temperature	-20 °C to 40 °C
Light source	2 x 4 LED	CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80	Lens / Reflector / Optic	Clear toughened glass
Power	12 W	Bug	B0-U0-G0	MacAdam Ellipse	3 SDCM
Lumen	536 - 636 lm	ULR	<1%	Lifetime L90B10 (hours)	> 90,000
Efficacy	45 - 53 lm/W	ULOR	<1%	Lifetime L80B10 (hours)	> 90,000
Driver option	Integral control gear	CIE flux code n°3	99	Lifetime L80B50 (hours)	> 90,000
Driver	Constant current (CC)	Dimming type	On/Off		
Input voltage	220-240 V 50/60 Hz		Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	T2, T3, T4	Product colours			
		Weight	5.9 kg		

Accessory



Anchor bolt
A10791
