

NYBRO 8 (NYB-30227)



Product description

Down - 60x80 mm - 1178 mm - RGBW DMX



microPrim™

Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Passive thermal management
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Up and down light distribution options
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)


Optic



Product colour



Special finishes upon request

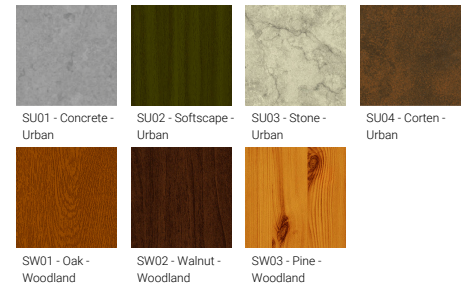


NYBRO 8 (NYB-30227)

Technical information

| | | | | | |
|----------------------|-----------------------|--------------------------|--------------------|------------------------------|---|
| Material | Aluminium | Input voltage | 220-240 V 50/60 Hz | Dimming type | DMX, DMX/RDM |
| Light source | 192 LED | Optic | O, P | Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Power | 42 W | CCT / CRI | RGBW40 | | |
| Lumen | 2904 lm | Bug | B1-U0-G0, B1-U0-G1 | | |
| Efficacy | 121 lm/W | ULR | 0% | Weight | 4.0 kg |
| Driver option | Integral control gear | ULOR | 0% | Operating temperature | -20 °C to 40 °C |
| Driver | Constant current (CC) | CIE flux code n°3 | 96, 98 | Variants (DMX/RDM) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

NYB-30227

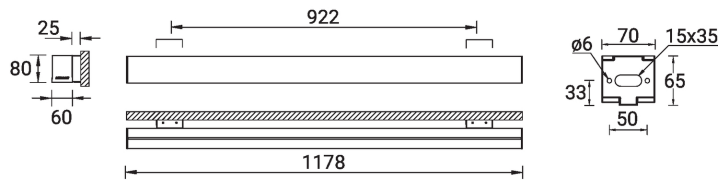

NYBRO 8 (NYB-30227)**Accessory**

Continuous-coupler bracket
(60/70 mm Down & 60 mm
Down & Up profile)
A81581



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM