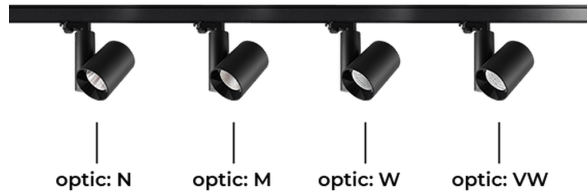




**BERLIN 2 (BEB-80031)****Product description**

Small

**Luminaire Structure**

- Die-cast aluminium housing heat sink
- Adjustable: Tilt 2x90°, Rotation 350°
- With powder coating
- Aluminium reflector
- Integral control gear
- With 3-phase universal adapter

**Optic****N**      **M**      **W****Product colour**


03 - White (RAL 9003)      15 - Black (RAL 9005)

**BERLIN 2 (BEB-80031)**

**Technical information**

<b>Material</b>	Aluminium	<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Light source</b>	1 LED	<b>Optic</b>	N, M, W, VW	<b>Product colours</b>	Black, White
<b>Power</b>	15 W	<b>Optic value</b>	14°, 21°, 29°, 50°	<b>Weight</b>	1.0 kg
<b>Lumen</b>	711 - 1023 lm	<b>CCT / CRI</b>	3000K CRI90, 4000K CRI90	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Efficacy</b>	47 - 68 lm/W	<b>ULR</b>	<1%	<b>Lens / Reflector / Optic</b>	Aluminium reflector
<b>Driver option</b>	Integral control gear	<b>ULOR</b>	<1%	<b>Variants (1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Driver</b>	Constant current (CC)	<b>CIE flux code n°3</b>	100		

BEB-80031

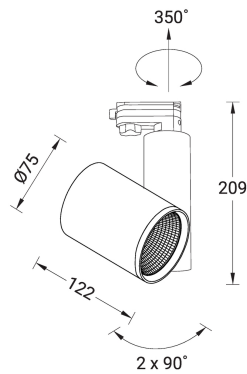

**BERLIN 2** (BEB-80031)

**Accessory**

---



Honeycomb louvre  
**A80110**



DALI Control System  
**Control-DALI**