


**MASK 3 (MK-60269)**



**Product description**

With recessing box / driver - Optic 360°



microPrim™

**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316

- Durable silicone rubber gasket
- High-efficiency glass lens
- Integral control gear
- Recessing box in high-density polyethylene is included
- To ensure efficient drainage, gravel must be used to a depth of 450 mm and width of 300 mm beneath the housing and should also be placed around luminaire


- Suitable for drive-over with a maximum load of 4,000 kg for MK-60249, MK-60259, 2,000 kg for MK-60269, 1,000 kg for MK-60729
- Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 10 km/h
- Load is transferred by the housing to the foundation

**Optic**




G

**Product colour**

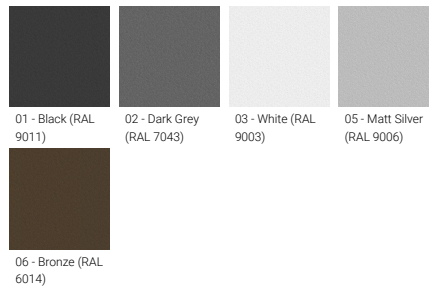

**Special finishes upon request**

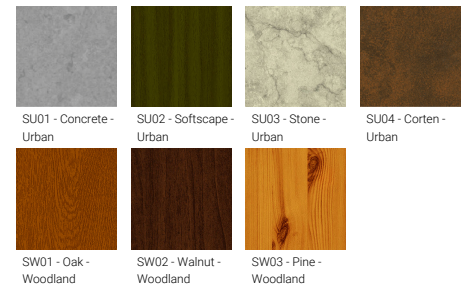


**MASK 3 (MK-60269)**

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	4 COB
<b>Power</b>	15 W
<b>Lumen</b>	402 - 433 lm
<b>Efficacy</b>	27 - 29 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)

<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	G
<b>Optic value</b>	360°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	4.4 kg

<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	One cable gland supplied with 1 m of 3x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry, through wiring upon request
<b>Lens / Reflector / Optic</b>	High-efficiency glass lens
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 50,000
<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

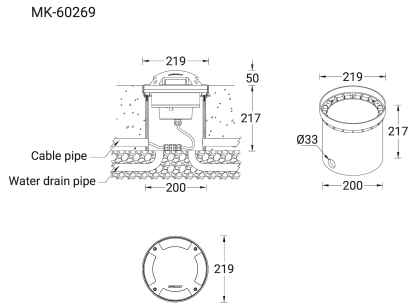

**MASK 3** (MK-60269)

**Accessory**

---



DALI Control System  
**Control-DALI**

---