

OULU 8 (OUL-81023)



Product description

Down - 22.5° - R2500 - RGBW



microPrim™

Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Multiple angles available
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Opal PMMA diffuser (UGR <19) for glare control
- Integral control gear
- Steel brackets for ceiling down mounting option
- Up and down light distribution options

- Wireless control available through Bluetooth connection

Optic



0

Product colour



01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

OULU 8 (OUL-81023)

Technical information

| | | | | | |
|----------------------|-----------------------|----------------------|-----------------------|--------------------------------|---|
| Material | Aluminium | Driver | Constant current (CC) | Product colours | Black, White, Matt Silver, Concrete |
| Light source | 344 LED | Input voltage | 220-240 V 50/60 Hz | | - Urban, Softscape - Urban, Stone |
| Power | 19 W | Optic | 0 | - Urban, Corten - Urban, Oak - | Woodland, Walnut - Woodland, |
| Lumen | 545 lm | Optic value | Opal | Pine - Woodland | |
| Efficacy | 29 lm/W | CCT / CRI | RGBW40 | Weight | 2.5 kg |
| Driver option | Integral control gear | Dimming type | DMX/RDM | Operating temperature | -20 °C to 40 °C |
| | | | | Variants (DMX/RDM) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

OUL-81023

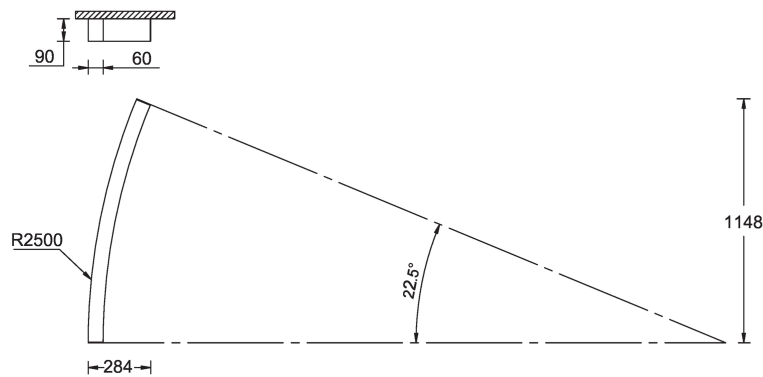

OULU 8 (OUL-81023)

Accessory



Ceiling-mounting bracket (40 mm profile)
A81381



Continuous-coupler bracket
A81781



Xpress wireless switch
A90591



DALI Control System
Control-DALI



DMX Control System
Control-DMX