

**JET 49** (JE-20001) (Version 2)



**Product description**


1 side - Supplied with specific 3 m square, straight aluminium pole: APC130102-JE-20001




**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Extruded aluminium column
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 140 km/h
- Available without pole upon request


**Optic**



**Product colour**

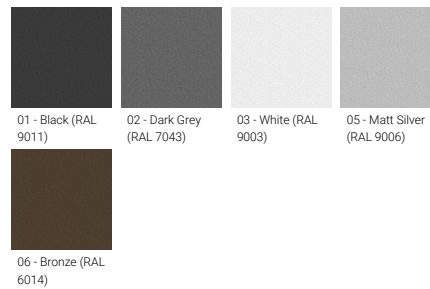

**Special finishes upon request**

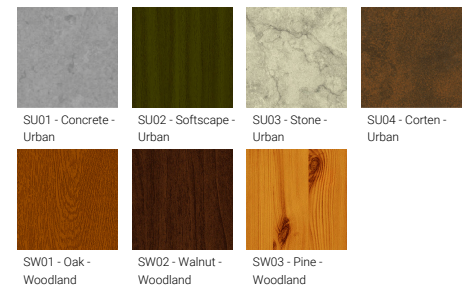



**JET 49** (JE-20001) (Version 2)**Accessory**

---



Root mount kit  
**A20491**



Circuit breaker box IP44  
**A21291**



DALI Control System  
**Control-DALI**

**Pole (required)**

---



3 m - Square, straight aluminium  
pole for JET  
**APC130102-JE-20001**