

ITAC 2 (IT-31972) (Version 2)



Product description

Dome diffuser



microPrim™



Luminaire Structure


- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic




G

Product colour

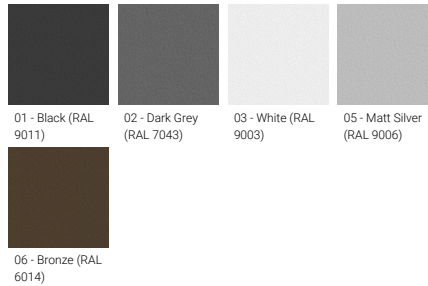

Special finishes upon request

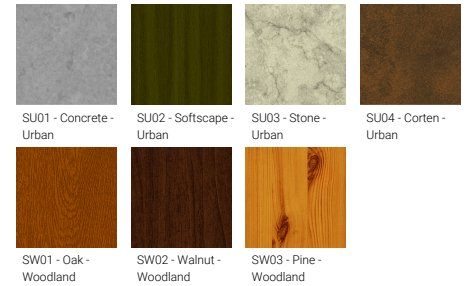

ITAC 2 (IT-31972) (Version 2)


Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 80 LED |
| Power | 20 W |
| Lumen | 1676 - 1764 lm |
| Efficacy | 84 - 88 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |


| | |
|--------------------------|--------------------------|
| Optic | G |
| Optic value | 120°x180° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Bug | B0-U2-G1 |
| ULR | 9% |
| ULOR | 9% |
| CIE flux code n°3 | 91 |
| Dimming type | On/Off, 1-10V, DALI |

| | |
|---------------------------------------|--|
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 2.9 kg |
| Operating temperature | -20 °C to 50 °C |
| Through wiring | Two cable entries for through wiring |
| Lens / Reflector / Optic | Opal UV-stabilised polycarbonate diffuser Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| Variants (On/Off, 1-10V, DALI) | |

IT-31972

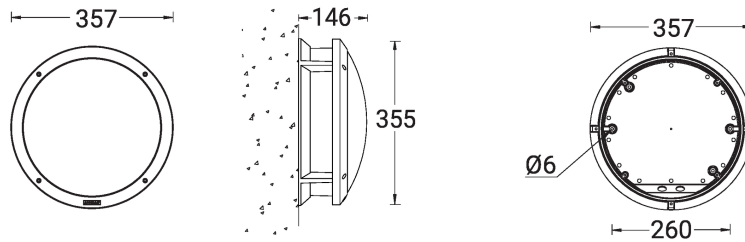

ITAC 2 (IT-31972) (Version 2)**Accessory**



Surface mounting box for easy
cabling (ITAC 2)
SCE-ITAC-2



DALI Control System
Control-DALI
