

LBX 2 (LB-40437) (Version 1)



Product description

Without remote driver - With recessing box - Constant voltage (CV) 24 V - Class III




microPrim™




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 0.3 m of 3x0.5 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is included

Product colour

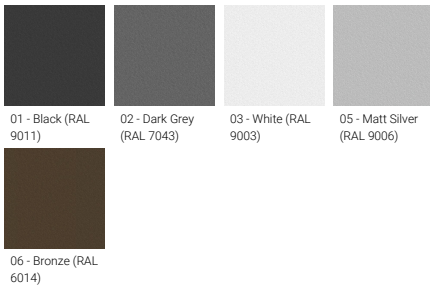

Special finishes upon request

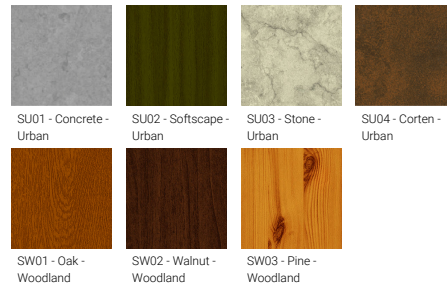

LBX 2 (LB-40437) (Version 1)


Technical information

Material	Aluminium
Light source	1 LED
Power	2 W
Lumen	39 lm
Efficacy	20 lm/W
Driver option	Remote driver (not included)
Driver	Constant voltage (CV)
Input voltage	24 VDC

Optic	G
Optic value	34° x 68°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U1-G0
ULR	4%
ULOR	4%
CIE flux code n°3	97
Dimming type	On/Off

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	0.3 kg
Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 0.3 m of 3x0.5 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass

LB-40437

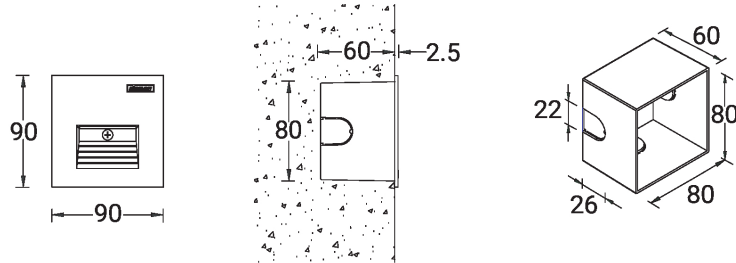

LBX 2 (LB-40437) (Version 1)**Accessory**



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND
