# NYBRO 2 (NYB-80124)

IP20

## Product description

Down - 70x80 mm - 1188 mm - Integrated sensor

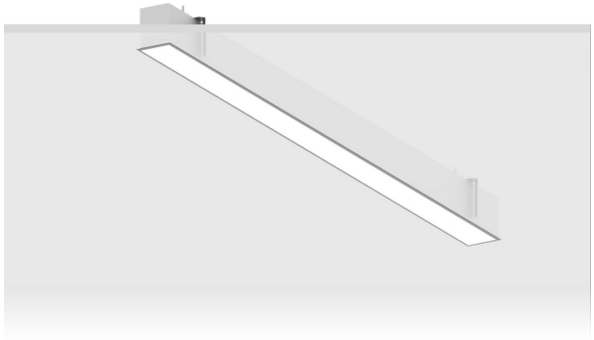

microPrim™

## Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Stainless steel brackets and screws for mounting
- Down light distribution only
- Wireless control available through Bluetooth connection
- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

## Optic



O P

## Product colour

01 - Black (RAL 9011) | 03 - White (RAL 9003) | 05 - Matt Silver (RAL 9006)

## Special finishes upon request

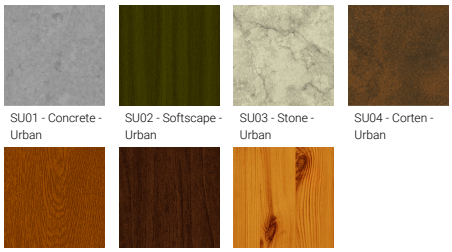

SU01 - Concrete - Urban | SU02 - Softscape - Urban | SU03 - Stone - Urban | SU04 - Corten - Urban

SW01 - Oak - Woodland | SW02 - Walnut - Woodland | SW03 - Pine - Woodland

We reserve the right to make technical and design changes.



**THAILAND**
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
**info@ligman.com**

GLP Good Labour Practices

# NYBRO 2 (NYB-80124)

## Technical information

| | |
|---|---|
| **Material** | Aluminium |
| **Light source** | 132 LED |
| **Power** | 35 W |
| **Lumen** | 4000 lm |
| **Efficacy** | 114 lm/W |
| **Driver option** | Integral control gear |

| | |
|---|---|
| **Driver** | Constant current (CC) |
| **Input voltage** | 220-240 V 50/60 Hz |
| **Optic** | O, P |
| **Optic value** | Opal, Micro-prismatic |
| **CCT / CRI** | 3000K CRI80, 4000K CRI80 |
| **Dimming type** | DALI |

| | |
|---|---|
| **Product colours** | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| **Weight** | 4.1 kg |
| **Operating temperature** | -20 °C to 40 °C |
| **Variants (DALI)** | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

NYB-80124






**THAILAND**
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
**info@ligman.com**

GLP Good Labour Practices

## Accessory

Continuous-coupler bracket (60/70 mm Down & 60 mm Down & Up profile)
**A81581**



**THAILAND**
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
**info@ligman.com**

GLP Good Labour Practices