

DUOMO 7 (DU-30136-2-2)



Product description

Medium - Straight shade - Cone top



microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible for DUOMO 6, DUOMO 7

Product colour



Special finishes upon request

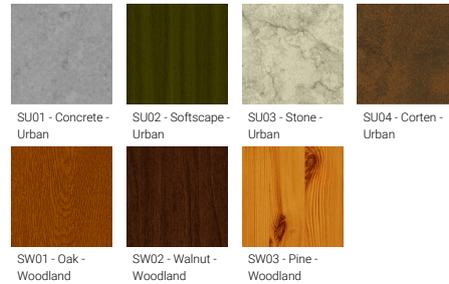

DUOMO 7 (DU-30136-2-2)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1 COB	Optic value	128°		
Power	41 W	CCT / CRI	3000K CRI80, 4000K CRI80	Weight	9.2 kg
Lumen	1763 - 1785 lm	Bug	B1-U3-G1	Operating temperature	-20 °C to 40 °C
Efficacy	43 - 44 lm/W	ULR	15%	Through wiring	Two cable entries for through wiring
Driver option	Integral control gear	ULOR	15%	Lens / Reflector / Optic	Opal toughened glass diffuser
Driver	Constant current (CC)	CIE flux code n°3	87	MacAdam Ellipse	3 SDCM
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI	Lifetime L90B10 (hours)	> 55,000
				Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

DU-30136-2-2

