

NYBRO 8 (NYB-30256)



Product description

Down - 60x80 mm - 2330 mm - RGBW



microPrim™


Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Passive thermal management
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Up and down light distribution options
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)


Optic



Product colour



Special finishes upon request

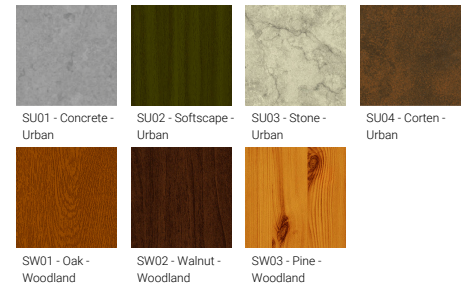


NYBRO 8 (NYB-30256)

Technical information

Material	Aluminium	Driver option	Integral control gear	CCT / CRI	RGBW40
Light source	384 LED	Driver	Constant current (CC)	Dimming type	Bluetooth
Power	84 W	Input voltage	220-240 V 50/60 Hz	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Lumen	5808 lm	Optic	O, P		
Efficacy	69 lm/W	Optic value	Opal, Micro-prismatic		
				Weight	7.0 kg
				Operating temperature	-20 °C to 40 °C

NYB-30256

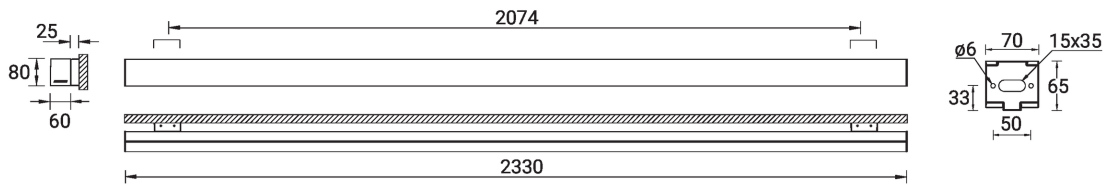

NYBRO 8 (NYB-30256)**Accessory**



Continuous-coupler bracket
(60/70 mm Down & 60 mm
Down & Up profile)
A81581



Xpress wireless switch
A90591



DALI Control System
Control-DALI
