

INFINITE 1 (INF-30014)



Product description

Diffused - Without remote driver - Constant voltage (CV) 24 V - 25 x 25 x 800 mm



Luminaire Structure


- 6063 High density extruded aluminium alloy
- Adjustable stainless steel bracket
- Two cable entries for through wiring
- Two IP68 connectors supplied with 2x0.3 m of 2x0.5 sqmm outdoor cable
- Diffused polyurethane encapsulated
- Remote driver (not included)

Optic



0


Product colour

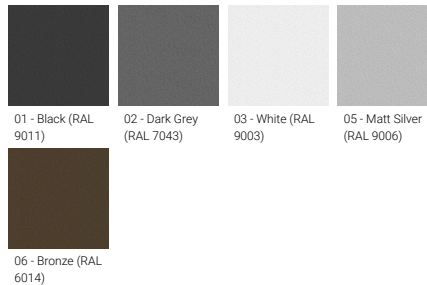

INFINITE 1 (INF-30014)

Technical information

Material	Aluminium	Driver	Constant voltage (CV)	Weight	0.6 kg
Light source	192 LED	Input voltage	24 VDC	Operating temperature	-20 °C to 50 °C
Power	19.2 W	Optic	O	Cable	Two IP68 connectors supplied with 2x0.3 m of 2x0.5 sqmm outdoor cable
Lumen	730 - 749 lm	CCT / CRI	2700K CRI90, 3000K CRI90		
Efficacy	38 - 39 lm/W	Dimming type	On/Off, DALI	Through wiring	Two cable entries for through wiring
Driver option	Remote driver (not included)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze	Lens / Reflector / Optic	Diffused polyurethane encapsulated



INFINITE 1 (INF-30014)

Accessory



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND




Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND



Cable - Connector IP68 Female 2
Pin Power - 300 mm (Custom
length available)
A615591



Continuous Joint clamp
A615891



Surface Mounting Clamp
A615991