



INFINITE 1 (INF-30003)**Product description**

Extra clear - Without remote driver - Constant voltage (CV) 24 V - 25 x 25 x 600 mm

**Luminaire Structure**

- 6063 High density extruded aluminium alloy
- Adjustable stainless steel bracket
- Two cable entries for through wiring
- Two IP68 connectors supplied with 2x0.3 m of 2x0.5 sqmm outdoor cable
- Extra clear polyurethane encapsulated
- Remote driver (not included)

Optic**N****M****W****E****Product colour**

01 - Black (RAL 9011)

02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)


INFINITE 1 (INF-30003)

Technical information

| | |
|----------------------|------------------------------|
| Material | Aluminium |
| Light source | 15 LED |
| Power | 14.4 W |
| Lumen | 475 - 605 lm |
| Efficacy | 33 - 42 lm/W |
| Driver option | Remote driver (not included) |

| | |
|----------------------|---------------------------------------|
| Driver | Constant voltage (CV) |
| Input voltage | 24 VDC |
| Optic | N, M, W, E |
| Optic value | 15°, 30°, 40°, 15°X50° |
| CCT / CRI | 2700K CRI90, 3000K CRI90, 4000K CRI90 |
| Dimming type | On/Off |

| | |
|---------------------------------|---|
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze |
| Weight | 0.43 kg |
| Operating temperature | -20 °C to 50 °C |
| Cable | Two IP68 connectors supplied with 2x0.3 m of 2x0.5 sqmm outdoor cable |
| Through wiring | Two cable entries for through wiring |
| Lens / Reflector / Optic | Extra clear polyurethane encapsulated |

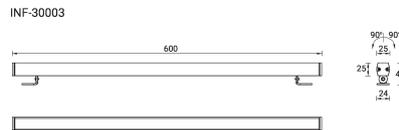

INFINITE 1 (INF-30003)**Accessory**

Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND



Cable - Connector IP68 Female 2
Pin Power - 300 mm (Custom
length available)
A615591



Continuous Joint clamp
A615891



Surface Mounting Clamp
A615991