

## INFINITE 1 (INF-30005)



### Product description


Extra clear - Without remote driver - Constant voltage  
(CV) 24 V - 25 x 25 x 1000 mm



### Luminaire Structure


- 6063 High density extruded aluminium alloy
- Adjustable stainless steel bracket
- Two cable entries for through wiring
- Two IP68 connectors supplied with 2x0.3 m of 2x0.5 sqmm outdoor cable
- Extra clear polyurethane encapsulated
- Remote driver (not included)

### Optic



N M W E

### Product colour

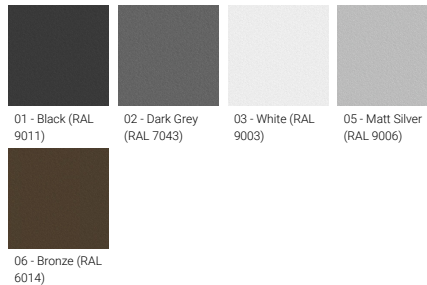

01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)  
06 - Bronze (RAL 6014)


## INFINITE 1 (INF-30005)

### Technical information

|                      |                              |
|----------------------|------------------------------|
| <b>Material</b>      | Aluminium                    |
| <b>Light source</b>  | 25 LED                       |
| <b>Power</b>         | 24 W                         |
| <b>Lumen</b>         | 792 - 1008 lm                |
| <b>Efficacy</b>      | 33 - 42 lm/W                 |
| <b>Driver option</b> | Remote driver (not included) |

|                      |                                       |
|----------------------|---------------------------------------|
| <b>Driver</b>        | Constant voltage (CV)                 |
| <b>Input voltage</b> | 24 VDC                                |
| <b>Optic</b>         | N, M, W, E                            |
| <b>Optic value</b>   | 15°, 30°, 40°, 15°X50°                |
| <b>CCT / CRI</b>     | 2700K CRI90, 3000K CRI90, 4000K CRI90 |
| <b>Dimming type</b>  | On/Off                                |

|                                 |                                                                       |
|---------------------------------|-----------------------------------------------------------------------|
| <b>Product colours</b>          | Black, Dark Grey, White, Matt Silver, Bronze                          |
| <b>Weight</b>                   | 0.75 kg                                                               |
| <b>Operating temperature</b>    | -20 °C to 50 °C                                                       |
| <b>Cable</b>                    | Two IP68 connectors supplied with 2x0.3 m of 2x0.5 sqmm outdoor cable |
| <b>Through wiring</b>           | Two cable entries for through wiring                                  |
| <b>Lens / Reflector / Optic</b> | Extra clear polyurethane encapsulated                                 |



## INFINITE 1 (INF-30005)

### Accessory



Driver (CV) - On/Off - 150 W -  
IP67 - 24 V  
**A34891-ND**



Driver (CV) - On/Off - 100 W -  
IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 36 W - IP67  
- 24 V  
**A34491-ND**



Driver (CV) - On/Off - 60 W - IP67  
- 24 V  
**A34591-ND**



Driver (CV) - On/Off - 200 W -  
IP67 - 24 V  
**A34991-ND**




Driver (CV) - On/Off - 350 W -  
IP67 - 24 V  
**A35091-ND**



Cable - Connector IP68 Female 2  
Pin Power - 300 mm (Custom  
length available)  
**A615591**



Continuous Joint clamp  
**A615891**



Surface Mounting Clamp  
**A615991**