

MARVEL 4 (MAV-20012)



Product description

Top Ø300 mm - Optic 90° x 90° - Supplied with a cylindrical, straight aluminium pole - Height option: 2.5 m



microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear
- Driver is to be installed within the pole-head. Please contact the factory for pole compatibility.

Optic




G

Product colour

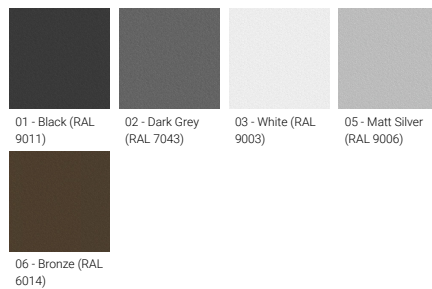

Special finishes upon request

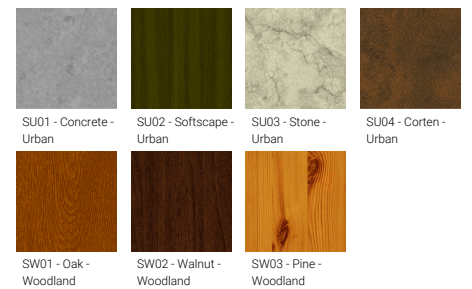


MARVEL 4 (MAV-20012)

Technical information

Material	Aluminium
Light source	12 LED
Power	20 W
Lumen	2151 - 2264 lm
Efficacy	108 - 113 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240V 50/60Hz

Optic	G
Optic value	137°X 89°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U2-G1
ULR	1%
ULOR	1%
CIE flux code n°3	98
Dimming type	On/Off, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	4.9 kg
Operating temperature	-20 °C to 40 °C
EPA (m2)	0.030
Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Variants (On/Off, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

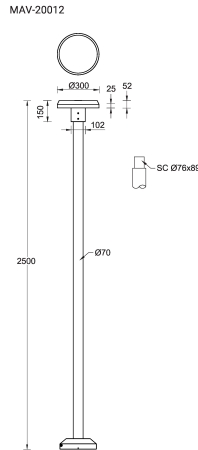

MARVEL 4 (MAV-20012)**Accessory**



2.5 m - Cylindrical, straight
aluminium pole for MARVEL
APD125070-MARVEL



DALI Control System
Control-DALI