

ECO 2 (EC-10601)



Product description

353x160 mm - 800 mm




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Formed sheet aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Toughened linear spread lens
- Integral control gear

Product colour

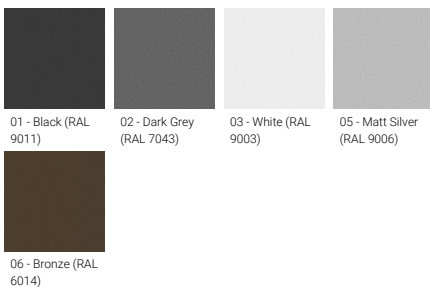

Special finishes upon request

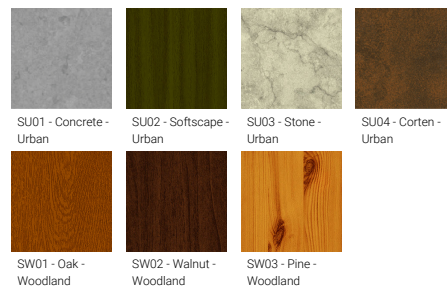

ECO 2 (EC-10601)


Technical information

Material	Aluminium
Light source	96 LED
Power	22 W
Lumen	1514 - 1593 lm
Efficacy	69 - 72 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240V 50/60Hz


Optic	G
Optic value	86°x50°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U2-G1
ULR	1%
ULOR	1%
CIE flux code n°3	93
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	9.3 kg
Operating temperature	-20 °C to 50 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Toughened linear spread lens
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

EC-10601

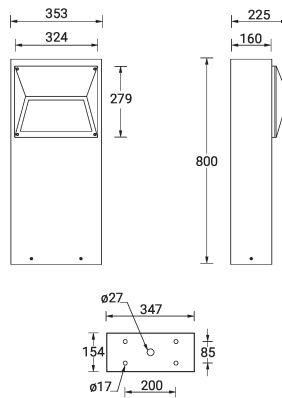

Accessory



Anchor bolt
A10591



DALI Control System
Control-DALI