


**LEGEND 1 (LE-40741-A)**



**Product description**


With recessing box - Aluminium frame - IK08

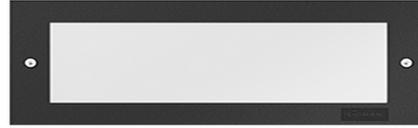

**Luminaire Structure**

- Available with interchangeable aluminium or stainless steel grade 316 frames
- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal high-efficiency PMMA diffuser
- Integral control gear

**Optic**




G

**Product colour**



**Special finishes upon request**

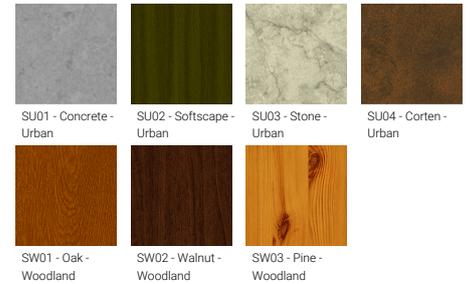

**LEGEND 1 (LE-40741-A)**


**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Aluminium             |
| <b>Light source</b>  | 60 LED                |
| <b>Power</b>         | 14 W                  |
| <b>Lumen</b>         | 1135 - 1194 lm        |
| <b>Efficacy</b>      | 81 - 85 lm/W          |
| <b>Driver option</b> | Integral control gear |
| <b>Driver</b>        | Constant current (CC) |
| <b>Input voltage</b> | 220-240V 50/60Hz      |

|                          |                          |
|--------------------------|--------------------------|
| <b>Optic</b>             | G                        |
| <b>Optic value</b>       | 98°x106°                 |
| <b>CCT / CRI</b>         | 3000K CRI80, 4000K CRI80 |
| <b>Bug</b>               | B1-U3-G1                 |
| <b>ULR</b>               | 49%                      |
| <b>ULOR</b>              | 49%                      |
| <b>CIE flux code n°3</b> | 65                       |
| <b>Dimming type</b>      | On/Off, 1-10V, DALI      |

|                                       |  |
|---------------------------------------|--|
| <b>Product colours</b>                | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>                         | 2.3 kg   |
| <b>Operating temperature</b>          | -20 °C to 50 °C  |
| <b>Through wiring</b>                 | Two cable entries for through wiring   |
| <b>Lens / Reflector / Optic</b>       | Opal high-efficiency PMMA diffuser   |
| <b>Variants (On/Off, 1-10V, DALI)</b> | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)  |

LE-40741-A

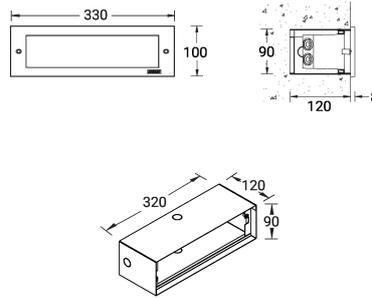

**LEGEND 1** (LE-40741-A)

**Accessory**

---



DALI Control System  
**Control-DALI**

---