




Product description

DMX Live control and Stand Alone controller

- USB connection
- 512 DMX512 channels universe in live mode (computer)
- 256 DMX512 channels universe in stand alone
- 8 dry contact trigger ports via HE10 connector
- stand alone mode with 1 area and 20 scenes

Technical information

Package	Interface, cdrom, usb cable
OS Requirement	Mac OSx 10.6/10.7/10.8 - Windows XP/ VISTA/SEVEN/8 32/64 bits and USB 2.0
Colors	Blue, Orange, Gray, Green, Marine, White, Red
Connections	XLR3, mini USB, 1 HE10
Power	Power From 5V to 5.5V DC (AC/DC adapter in option, ref: POWER1_EU)
Certifications	EC, EMC, ROHS, ETL, UL (some are in progress)
Interface	79x92x43 mm 90g
Package	140x135x50 mm 290g
Use	Environement IP20 Temperature 0°C to 50°C
Buttons	2 buttons to change scene (previous/next) + 1 button to change dimmer

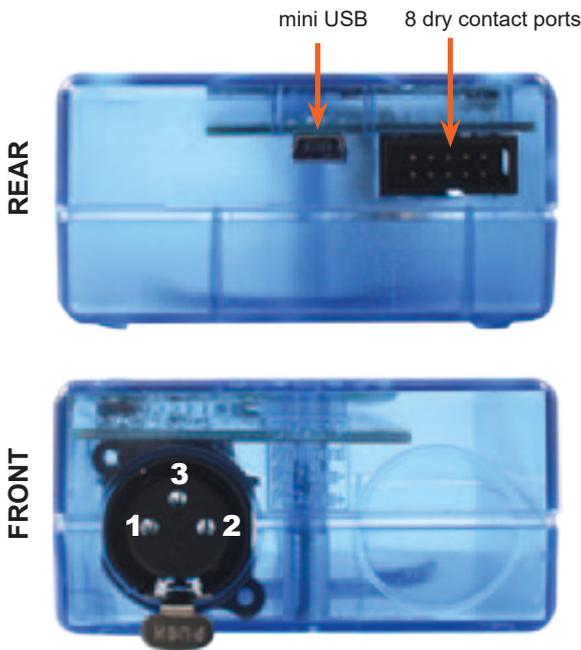


- 1 DMX1 ground
- 2 DMX1 data-
- 3 DMX1 data+

External HE10



- | | |
|-----------|------------|
| P1 PORT 1 | P6 PORT 6 |
| P2 PORT 2 | P7 PORT 7 |
| P3 PORT 3 | P8 PORT 8 |
| P4 PORT 4 | GND Ground |
| P5 PORT 5 | |


LIVE USE WITH COMPUTER

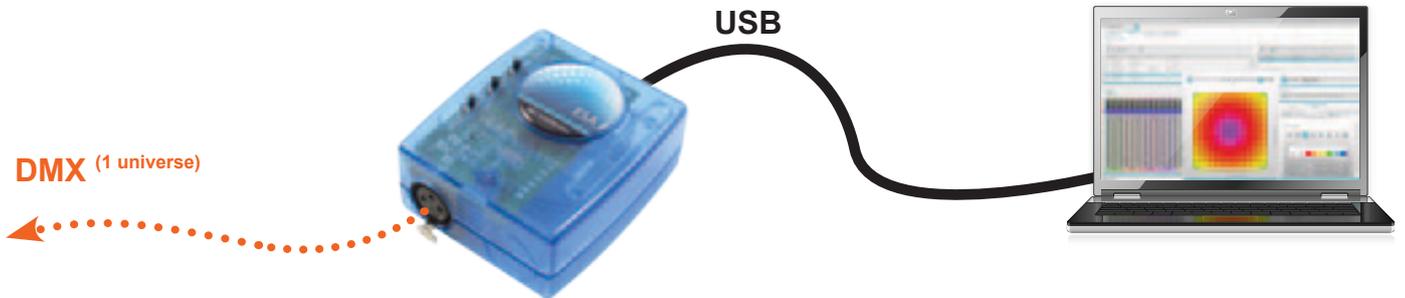

STAND ALONE USE

PORTS SETUP

Connect any of the port pins with the ground pin to trigger a volt free dry contact port. Ports can be combined in binary to have up to 255 triggers.

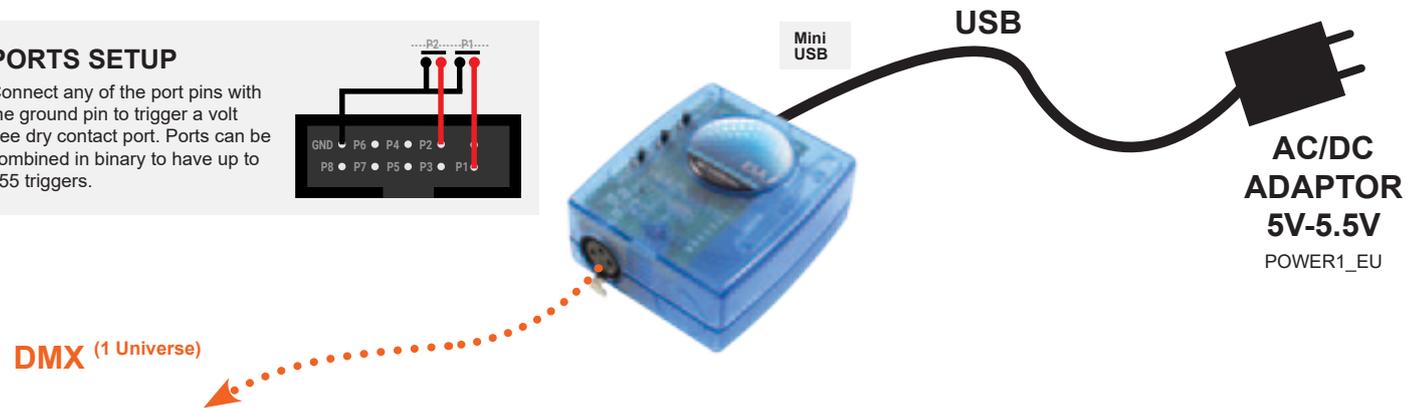

Setting up the controller

Programming the Controller

Windows / Mac Programming Software



ESA Pro 2 Software (Windows/Mac) - Multi-zone



ESA2 Software (Windows/Mac) - Single Zone



Hardware Manager (Windows/Mac) - Firmware, clock