


**ECO 1 (EC-40581)**



**Product description**

With recessing box




microPrim™

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Toughened linear spread lens
- Integral control gear

**Optic**



G

**Product colour**



**Special finishes upon request**



**ECO 1** (EC-40581)


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	96 LED
<b>Power</b>	22 W
<b>Lumen</b>	1514 - 1593 lm
<b>Efficacy</b>	69 - 72 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)

<b>Input voltage</b>	220-240V 50/60Hz
<b>Optic</b>	G
<b>Optic value</b>	86°x50°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B0-U2-G1
<b>ULR</b>	1%
<b>ULOR</b>	1%

<b>CIE flux code n°3</b>	93
<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	4.8 kg
<b>Operating temperature</b>	-20 °C to 50 °C
<b>Through wiring</b>	Two cable entries for through wiring
<b>Lens / Reflector / Optic</b>	Toughened linear spread lens

EC-40581

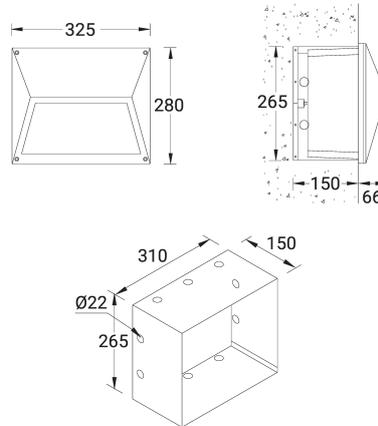

**Accessory**

---



DALI Control System  
**Control-DALI**

---