



360° Lighting (70 W) + WiFi (LCO-20014)

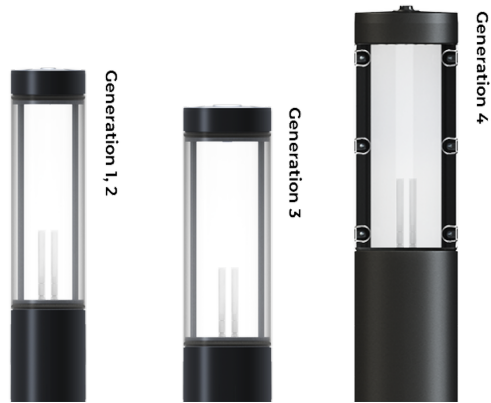

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear acrylic PMMA diffuser

Optic

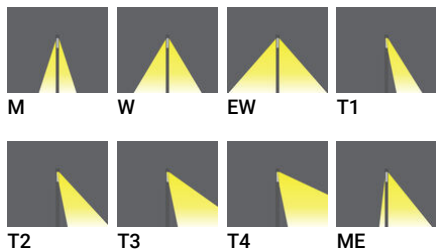

360° Lighting (70 W) + WiFi (LCO-20014)

Technical information

Light source	24 LED
Power	70 W
Lumen	5442 - 7832 lm
Efficacy	78 - 112 lm/W

Input voltage	220-240V 50/60Hz
Optic	M, W, EW, T1, T2, T3, T4, ME
CCT / CRI	4000K CRI80
Weight	14.5 kg

EPA (m2)	0.170
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear acrylic PMMA diffuser

LCO-20014

