
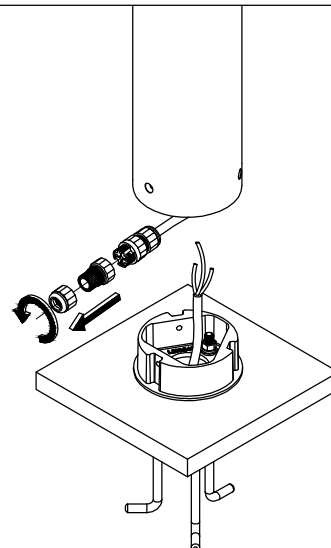
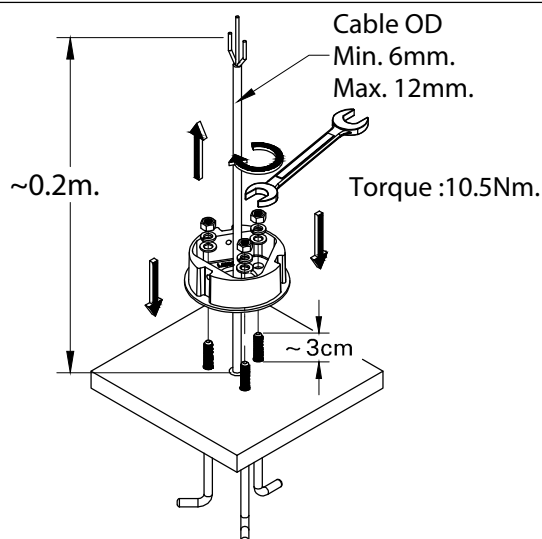
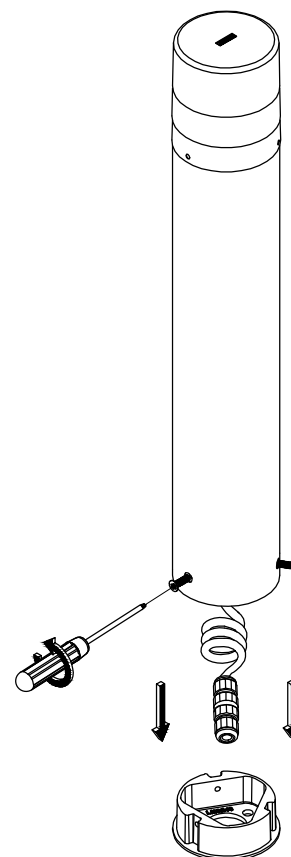


**For Installation of Mini Lightsoft bollard.
Model. LH-10573, LH-10583 and LH-10593 and LH-10603**

Product drawing (dimensions) IP65 IK08 CLASS I

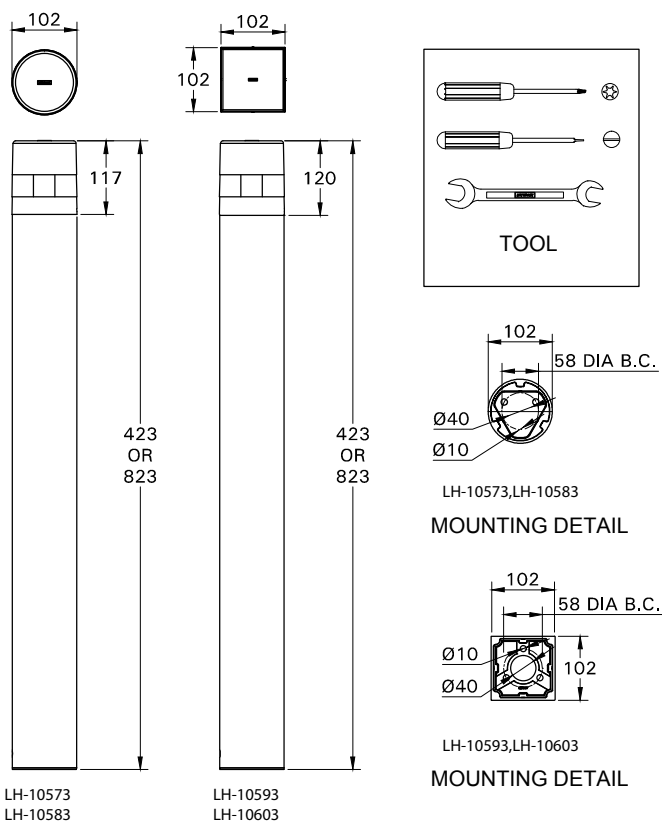

- LIGMAN standard products are supplied with the control gear 220-240V 50/60Hz.
The control gear for other voltages and frequencies is available upon request, please consult us for more details.
- LIGMAN luminaires are designed to conform IEC 60598 2-1 standard.

Technical amendments and modifications techniques reserved.

Ligman Lighting

Europe Headquarters
Ligman Europe s.r.o.
VGP Park Usti nad Labem, P 2
Prestanov 113
403 17 Prestanov
Czech Republic
Tel. +420 608 740 504 | sales.cz@ligman.com

Thailand Headquarters
Ligman Lighting Co., Ltd.
17/2 Moo 4, Monthong, Bangnampreaw
Chachoengsao 24150 Thailand
Tel : +66 (2) 7339140
info@ligman.com

Ligman Ltd
Regus House, Victory Way
Crossways Business Park
Dartford DA2 6QD
Tel. 0800 975 0622
sales.uk@ligman.com

