



Pittsfield 3 Dimming Type

Surface ceiling luminaires


Project :	Location :	Type :	Quantity :
Note :			



Luminaire Structure

Linear suspended, recessed and surface ambient lighting Expansive and elegant portfolio of rectilinear workplace lighting fixtures

Light Symbol



Down light


Ordering guide sample

PIT-80201	- O - W30 - DA - A90291	Diffuser for light output control O - Opal diffuser UGR <19 P - Micro-prismatic UGR <13	Dimming Type ND - Non dimmable DI - 1-10V dimmable DA - DALI dimmable	Colour Temperature W27 - Warm 2700K W30 - Warm white 3000K W40 - Neutral white 4000K W50 - Cool white 5000K
	Diffuser Colour Dim Type Accessory 1			

Product Code

Model No.	No. LED		System Power W	Lumen lm	Colour	EEC	Dimension		Weight kg	
	UP	DOWN					L1	L2		
SURFACE CEILING MOUNTED · DOWN LIGHT · DIMMING TYPE · OPAL DIFFUSER										
PIT-80201	- O - W27	—	288 LED	23	2459	2700K	A++	720	115	4.2
PIT-80201	- O - W30	—	288 LED	23	2572	3000K	A++	720	115	4.2
PIT-80201	- O - W40	—	288 LED	23	2685	4000K	A++	720	115	4.2
PIT-80201	- O - W50	—	288 LED	23	2796	5000K	A++	720	115	4.2
PIT-80202	- O - W27	—	288 LED	32	3454	2700K	A++	720	115	4.2
PIT-80202	- O - W30	—	288 LED	32	3613	3000K	A++	720	115	4.2
PIT-80202	- O - W40	—	288 LED	32	3771	4000K	A++	720	115	4.2
PIT-80202	- O - W50	—	288 LED	32	3928	5000K	A++	720	115	4.2
PIT-80211	- O - W27	—	432 LED	27	3056	2700K	A++	1060	280	5.6
PIT-80211	- O - W30	—	432 LED	27	3196	3000K	A++	1060	280	5.6
PIT-80211	- O - W40	—	432 LED	27	3336	4000K	A++	1060	280	5.6
PIT-80211	- O - W50	—	432 LED	27	3475	5000K	A++	1060	280	5.6
PIT-80212	- O - W27	—	432 LED	38	4279	2700K	A++	1060	280	5.6
PIT-80212	- O - W30	—	432 LED	38	4475	3000K	A++	1060	280	5.6
PIT-80212	- O - W40	—	432 LED	38	4671	4000K	A++	1060	280	5.6
PIT-80212	- O - W50	—	432 LED	38	4866	5000K	A++	1060	280	5.6
PIT-80221	- O - W27	—	576 LED	35	3938	2700K	A++	1390	455	6.8
PIT-80221	- O - W30	—	576 LED	35	4119	3000K	A++	1390	455	6.8
PIT-80221	- O - W40	—	576 LED	35	4299	4000K	A++	1390	455	6.8
PIT-80221	- O - W50	—	576 LED	35	4479	5000K	A++	1390	455	6.8
PIT-80222	- O - W27	—	576 LED	49	5537	2700K	A++	1390	455	6.8
PIT-80222	- O - W30	—	576 LED	49	5791	3000K	A++	1390	455	6.8
PIT-80222	- O - W40	—	576 LED	49	6044	4000K	A++	1390	455	6.8
PIT-80222	- O - W50	—	576 LED	49	6296	5000K	A++	1390	455	6.8

Optional diffuser


(- O)
Opal diffuser
UGR <19

(- P)
Micro-prismatic diffuser
UGR <13

Dimming Type

ND DI DA

Colour Code

- 01	- 03	- 05
Black RAL 9011	White RAL 9003	Matt Silver RAL 9006

RESET

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.

Pittsfield 3 Dimming Type


Surface ceiling luminaires

Project :	Location :	Type :	Quantity :
Note :			

Product Code

Model No.	No. LED		System Power W	Lumen lm	Colour	EEC	Dimension		Weight kg	
	UP	DOWN					L1	L2		
SURFACE CEILING MOUNTED · DOWN LIGHT · DIMMING TYPE · MICRO-PRISMATIC DIFFUSER										
PIT-80201	- P - W27	—	288 LED	23	2262	2700K	A++	720	115	4.2
PIT-80201	- P - W30	—	288 LED	23	2366	3000K	A++	720	115	4.2
PIT-80201	- P - W40	—	288 LED	23	2470	4000K	A++	720	115	4.2
PIT-80201	- P - W50	—	288 LED	23	2573	5000K	A++	720	115	4.2
PIT-80202	- P - W27	—	288 LED	32	3161	2700K	A++	720	115	4.2
PIT-80202	- P - W30	—	288 LED	32	3306	3000K	A++	720	115	4.2
PIT-80202	- P - W40	—	288 LED	32	3451	4000K	A++	720	115	4.2
PIT-80202	- P - W50	—	288 LED	32	3595	5000K	A++	720	115	4.2
PIT-80211	- P - W27	—	432 LED	27	2788	2700K	A++	1060	280	5.6
PIT-80211	- P - W30	—	432 LED	27	2915	3000K	A++	1060	280	5.6
PIT-80211	- P - W40	—	432 LED	27	3043	4000K	A++	1060	280	5.6
PIT-80211	- P - W50	—	432 LED	27	3170	5000K	A++	1060	280	5.6
PIT-80212	- P - W27	—	432 LED	38	3922	2700K	A++	1060	280	5.6
PIT-80212	- P - W30	—	432 LED	38	4102	3000K	A++	1060	280	5.6
PIT-80212	- P - W40	—	432 LED	38	4282	4000K	A++	1060	280	5.6
PIT-80212	- P - W50	—	432 LED	38	4460	5000K	A++	1060	280	5.6
PIT-80221	- P - W27	—	576 LED	35	3447	2700K	A++	1390	455	6.8
PIT-80221	- P - W30	—	576 LED	35	3605	3000K	A++	1390	455	6.8
PIT-80221	- P - W40	—	576 LED	35	3763	4000K	A++	1390	455	6.8
PIT-80221	- P - W50	—	576 LED	35	3920	5000K	A++	1390	455	6.8
PIT-80222	- P - W27	—	576 LED	49	4800	2700K	A++	1390	455	6.8
PIT-80222	- P - W30	—	576 LED	49	5020	3000K	A++	1390	455	6.8
PIT-80222	- P - W40	—	576 LED	49	5240	4000K	A++	1390	455	6.8
PIT-80222	- P - W50	—	576 LED	49	5458	5000K	A++	1390	455	6.8

Accessory For Wireless Bluetooth




xPress Wireless switch (A90591)



Wireless Bluetooth (A90291)

Photometric

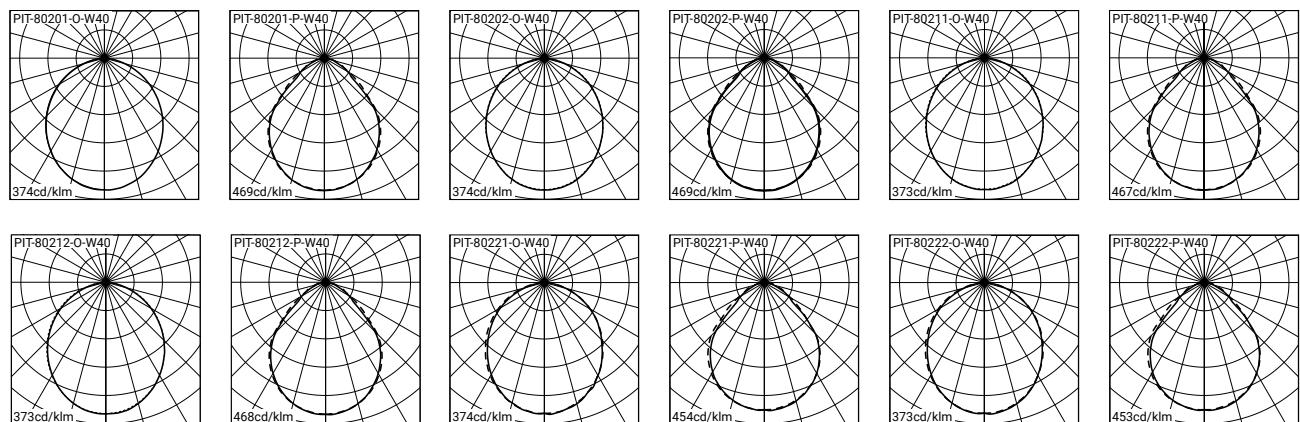

* Installation manual available online at www.ligman.com.
 * Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
 * Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.