
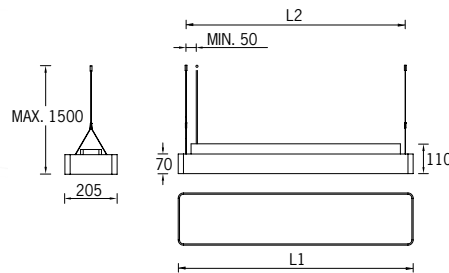


Pittsfield 4 Dimming Type

Pendant Direct-Indirect luminaires


Project :	Location :	Type :	Quantity :
Note :			



Luminaire Structure

Simple, cost effective adjustable underwater lights. Designed for simplicity and flexibility and built to last in any environment.

Light Symbol



Direct - indirect pendant light


Ordering guide sample

PIT-90101	- O - W30 - DA - A90291	Diffuser for light output control O - Opal diffuser UGR <19 P - Micro-prismatic UGR <13	Dimming Type ND - Non dimmable DI - 1-10V dimmable DA - DALI dimmable	Colour Temperature W27 - Warm 2700K W30 - Warm white 3000K W40 - Neutral white 4000K W50 - Cool white 5000K
-----------	-------------------------	---	--	---

Product Code

Model No.	No. LED		System Power W	Lumen lm	Colour	EEC	Dimension		Weight kg	
	UP	DOWN					L1	L2		
PENDANT · DIRECT-INDIRECT · DIMMING TYPE · OPAL DIFFUSER										
PIT-90101	- O - W27	168 LED	288 LED	38	4038	2700K	A++	720	692	3.7
PIT-90101	- O - W30	168 LED	288 LED	38	4223	3000K	A++	720	692	3.7
PIT-90101	- O - W40	168 LED	288 LED	38	4408	4000K	A++	720	692	3.7
PIT-90101	- O - W50	168 LED	288 LED	38	4592	5000K	A++	720	692	3.7
PIT-90102	- O - W27	168 LED	288 LED	47	5033	2700K	A++	720	692	3.7
PIT-90102	- O - W30	168 LED	288 LED	47	5264	3000K	A++	720	692	3.7
PIT-90102	- O - W40	168 LED	288 LED	47	5495	4000K	A++	720	692	3.7
PIT-90102	- O - W50	168 LED	288 LED	47	5724	5000K	A++	720	692	3.7
PIT-90111	- O - W27	240 LED	432 LED	50	5424	2700K	A++	1060	1032	5.2
PIT-90111	- O - W30	240 LED	432 LED	50	5673	3000K	A++	1060	1032	5.2
PIT-90111	- O - W40	240 LED	432 LED	50	5921	4000K	A++	1060	1032	5.2
PIT-90111	- O - W50	240 LED	432 LED	50	6168	5000K	A++	1060	1032	5.2
PIT-90112	- O - W27	240 LED	432 LED	61	6647	2700K	A++	1060	1032	5.2
PIT-90112	- O - W30	240 LED	432 LED	61	6951	3000K	A++	1060	1032	5.2
PIT-90112	- O - W40	240 LED	432 LED	61	7256	4000K	A++	1060	1032	5.2
PIT-90112	- O - W50	240 LED	432 LED	61	7558	5000K	A++	1060	1032	5.2
PIT-90121	- O - W27	336 LED	576 LED	62	6799	2700K	A++	1390	1372	6.4
PIT-90121	- O - W30	336 LED	576 LED	62	7111	3000K	A++	1390	1372	6.4
PIT-90121	- O - W40	336 LED	576 LED	62	7423	4000K	A++	1390	1372	6.4
PIT-90121	- O - W50	336 LED	576 LED	62	7732	5000K	A++	1390	1372	6.4
PIT-90122	- O - W27	336 LED	576 LED	75	8397	2700K	A++	1390	1372	6.4
PIT-90122	- O - W30	336 LED	576 LED	75	8782	3000K	A++	1390	1372	6.4
PIT-90122	- O - W40	336 LED	576 LED	75	9168	4000K	A++	1390	1372	6.4
PIT-90122	- O - W50	336 LED	576 LED	75	9549	5000K	A++	1390	1372	6.4

Optional diffuser


(-O) Opal diffuser
UGR <19

(-P) Micro-prismatic diffuser
UGR <13

Dimming Type

ND DI DA

Colour Code

- 01	- 03	- 05
Black RAL 9011	White RAL 9003	Matt Silver RAL 9006

RESET

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.

Pittsfield 4 Dimming Type


Pendant Direct-Indirect luminaires

Project :	Location :	Type :	Quantity :
Note :			

Product Code

Model No.	No. LED		System Power W	Lumen lm	Colour	EEC	Dimension		Weight kg	
	UP	DOWN					L1	L2		
PENDANT · DIRECT-INDIRECT · DIMMING TYPE · MICRO-PRISMATIC DIFFUSER										
PIT-90101	- P - W27	168 LED	288 LED	38	3841	2700K	A++	720	692	3.7
PIT-90101	- P - W30	168 LED	288 LED	38	4017	3000K	A++	720	692	3.7
PIT-90101	- P - W40	168 LED	288 LED	38	4194	4000K	A++	720	692	3.7
PIT-90101	- P - W50	168 LED	288 LED	38	4368	5000K	A++	720	692	3.7
PIT-90102	- P - W27	168 LED	288 LED	47	4740	2700K	A++	720	692	3.7
PIT-90102	- P - W30	168 LED	288 LED	47	4958	3000K	A++	720	692	3.7
PIT-90102	- P - W40	168 LED	288 LED	47	5175	4000K	A++	720	692	3.7
PIT-90102	- P - W50	168 LED	288 LED	47	5390	5000K	A++	720	692	3.7
PIT-90111	- P - W27	240 LED	432 LED	50	5156	2700K	A++	1060	1032	5.2
PIT-90111	- P - W30	240 LED	432 LED	50	5392	3000K	A++	1060	1032	5.2
PIT-90111	- P - W40	240 LED	432 LED	50	5628	4000K	A++	1060	1032	5.2
PIT-90111	- P - W50	240 LED	432 LED	50	5863	5000K	A++	1060	1032	5.2
PIT-90112	- P - W27	240 LED	432 LED	61	6290	2700K	A++	1060	1032	5.2
PIT-90112	- P - W30	240 LED	432 LED	61	6578	3000K	A++	1060	1032	5.2
PIT-90112	- P - W40	240 LED	432 LED	61	6867	4000K	A++	1060	1032	5.2
PIT-90112	- P - W50	240 LED	432 LED	61	7153	5000K	A++	1060	1032	5.2
PIT-90121	- P - W27	336 LED	576 LED	62	6308	2700K	A++	1390	1372	6.4
PIT-90121	- P - W30	336 LED	576 LED	62	6597	3000K	A++	1390	1372	6.4
PIT-90121	- P - W40	336 LED	576 LED	62	6886	4000K	A++	1390	1372	6.4
PIT-90121	- P - W50	336 LED	576 LED	62	7173	5000K	A++	1390	1372	6.4
PIT-90122	- P - W27	336 LED	576 LED	75	7661	2700K	A++	1390	1372	6.4
PIT-90122	- P - W30	336 LED	576 LED	75	8012	3000K	A++	1390	1372	6.4
PIT-90122	- P - W40	336 LED	576 LED	75	8363	4000K	A++	1390	1372	6.4
PIT-90122	- P - W50	336 LED	576 LED	75	8711	5000K	A++	1390	1372	6.4

Accessory For Wireless Bluetooth




xPress Wireless switch (A90591)




Wireless Bluetooth (A90291)

Accessory



Surface Mounted For Supply Cable (A80981)

Photometric

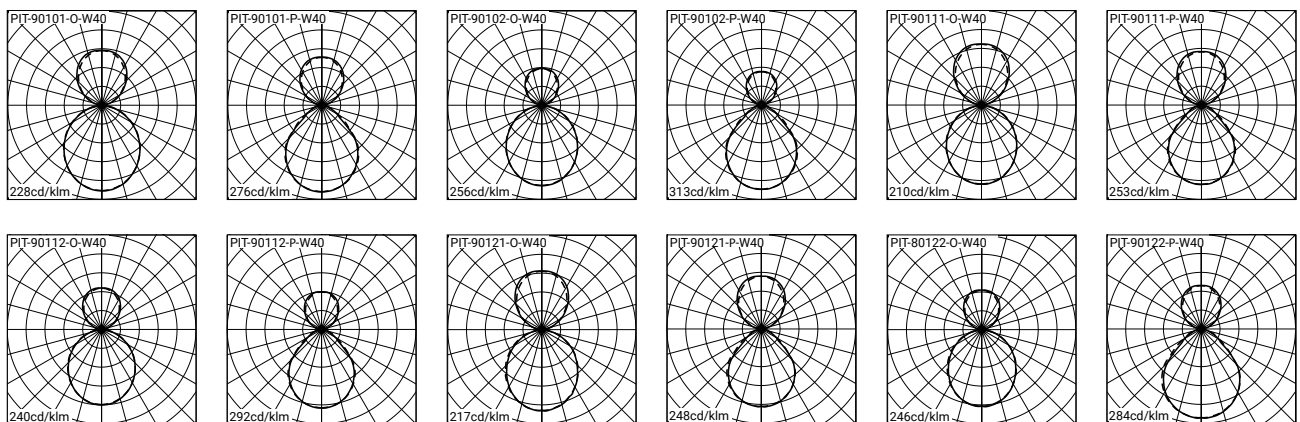

* Installation manual available online at www.ligman.com.
 * Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
 * Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.