


Jet 31

Surface wall luminaires


Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

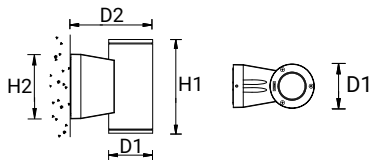

FOR Ø102mm.



Mounting detail

Luminaire Structure


- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting




Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — W

Wide beam with symmetrical light distribution for down-light



Façade — VW

Very wide beam with symmetrical light distribution for down-light

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30351 - N - W27	1 COB	15	1021	2700K	A++	20°	2.2	102	189	218	150
JE-30351 - M - W27	1 COB	15	1029	2700K	A++	24°	2.2	102	189	218	150
JE-30351 - W - W27	1 COB	15	1021	2700K	A++	36°	2.2	102	189	218	150
JE-30351 - VW - W27	1 COB	15	892	2700K	A++	71°	2.2	102	189	218	150
JE-30351 - N - W30	1 COB	15	1087	3000K	A++	20°	2.2	102	189	218	150
JE-30351 - M - W30	1 COB	15	1095	3000K	A++	24°	2.2	102	189	218	150
JE-30351 - W - W30	1 COB	15	1087	3000K	A++	36°	2.2	102	189	218	150
JE-30351 - VW - W30	1 COB	15	949	3000K	A++	71°	2.2	102	189	218	150
JE-30351 - N - W40	1 COB	15	1099	4000K	A++	20°	2.2	102	189	218	150
JE-30351 - M - W40	1 COB	15	1107	4000K	A++	24°	2.2	102	189	218	150
JE-30351 - W - W40	1 COB	15	1099	4000K	A++	36°	2.2	102	189	218	150
JE-30351 - VW - W40	1 COB	15	960	4000K	A++	71°	2.2	102	189	218	150

Colour Code

- 01	- 02	- 03	- 05	- 06	
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014	RESET

Ordering guide sample

JE-30351 - N - W30 - DI			
Beam	Colour	Dim Type	
Colour Temperature		Dimming Type	
W27 – Warm 2700K		ND – Non dimmable	
W30 – Warm white 3000K		DI – 1-10V dimming	
W40 – Neutral white 4000K		DA – DALI dimming	

Dimming Type

ND DI DA

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Technical amendments reserved.

Jet 31

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			

Photometric

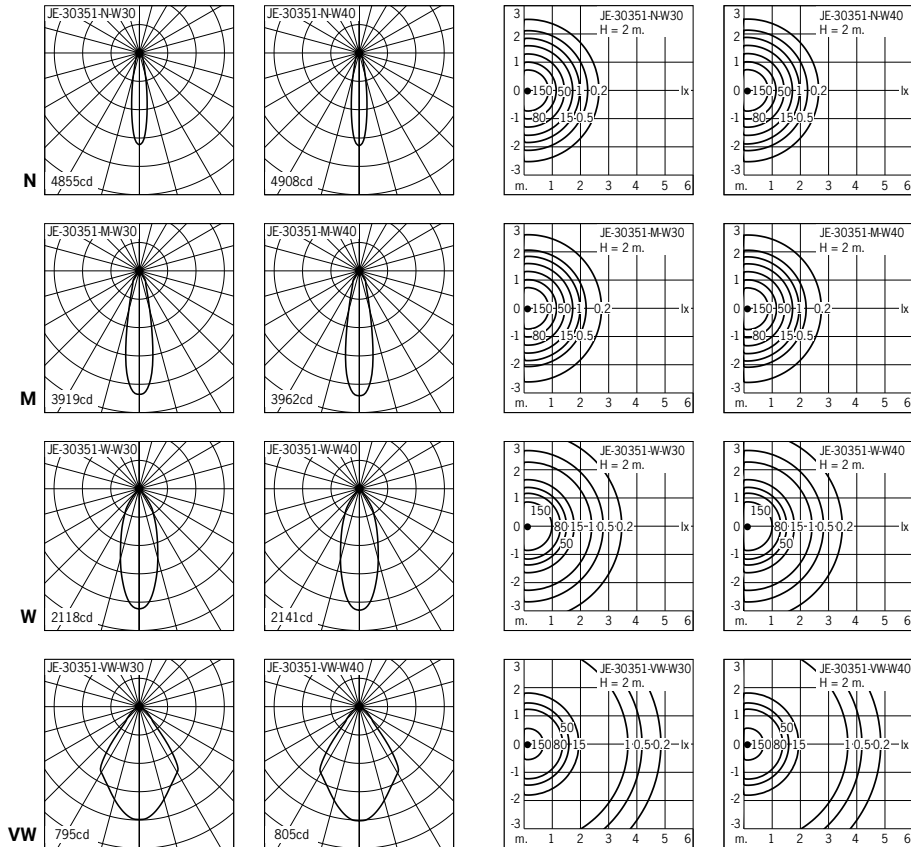

• Installation manual available online at www.ligman.com.

- Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
- Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co.,Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Technical amendments reserved.

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Jet 32

Surface wall luminaires


Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

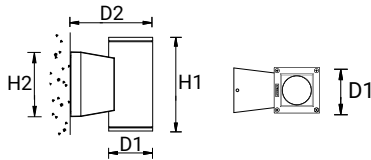

FOR Ø102mm.



Mounting detail

Luminaire Structure


- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting




Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — W

Wide beam with symmetrical light distribution for down-light



Façade — VW

Very wide beam with symmetrical light distribution for down-light

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30371 - N - W27	1 COB	15	1021	2700K	A++	20°	2.6	102	192	218	150
JE-30371 - M - W27	1 COB	15	1029	2700K	A++	24°	2.6	102	192	218	150
JE-30371 - W - W27	1 COB	15	1021	2700K	A++	36°	2.6	102	192	218	150
JE-30371 - VW - W27	1 COB	15	892	2700K	A++	71°	2.6	102	192	218	150
JE-30371 - N - W30	1 COB	15	1087	3000K	A++	20°	2.6	102	192	218	150
JE-30371 - M - W30	1 COB	15	1095	3000K	A++	24°	2.6	102	192	218	150
JE-30371 - W - W30	1 COB	15	1087	3000K	A++	36°	2.6	102	192	218	150
JE-30371 - VW - W30	1 COB	15	949	3000K	A++	71°	2.6	102	192	218	150
JE-30371 - N - W40	1 COB	15	1099	4000K	A++	20°	2.6	102	192	218	150
JE-30371 - M - W40	1 COB	15	1107	4000K	A++	24°	2.6	102	192	218	150
JE-30371 - W - W40	1 COB	15	1099	4000K	A++	36°	2.6	102	192	218	150
JE-30371 - VW - W40	1 COB	15	960	4000K	A++	71°	2.6	102	192	218	150

Colour Code

- 01	- 02	- 03	- 05	- 06	
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014	RESET

Ordering guide sample

JE-30371 - N - W30 - DI		
Beam	Colour	Dim Type
Colour Temperature W27 – Warm 2700K W30 – Warm white 3000K W40 – Neutral white 4000K		
Dimming Type ND – Non dimmable DI – 1-10V dimming DA – DALI dimming		

Dimming Type

ND DI DA

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Technical amendments reserved.

Jet 32

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			

Photometric

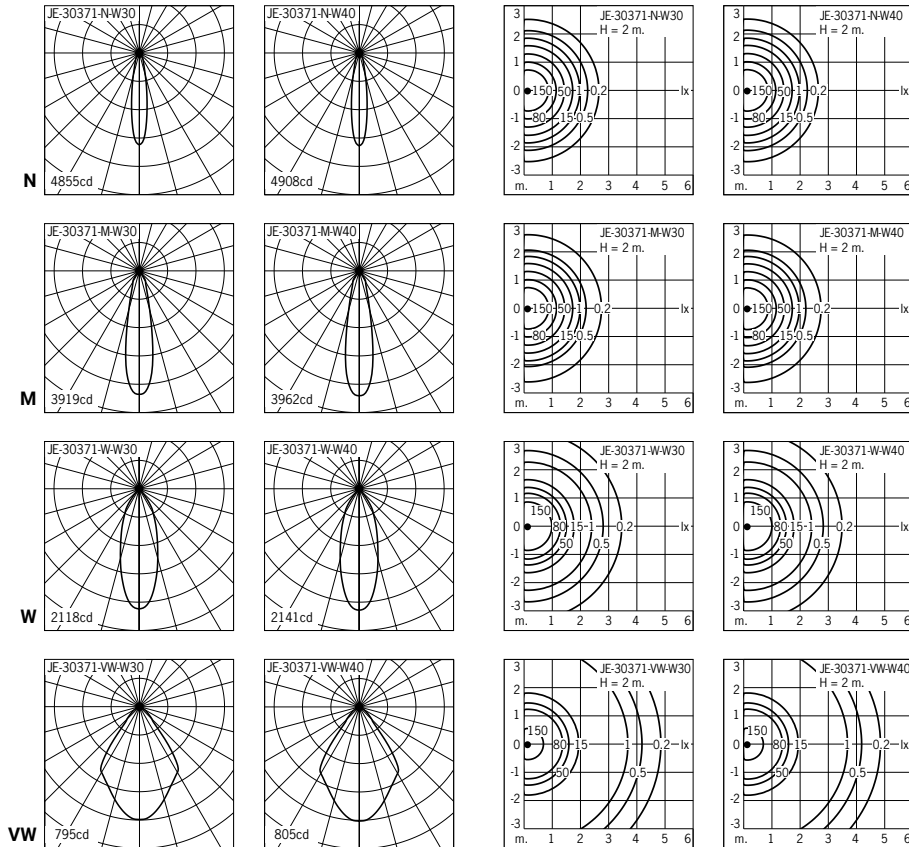

* Installation manual available online at www.ligman.com.
 • Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
 • Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.



Jet 33

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

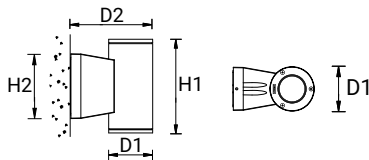

Mounting detail

Luminaire Structure

- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting




Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — W

Wide beam with symmetrical light distribution for down-light



Façade — VW

Very wide beam with symmetrical light distribution for down-light

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30391 - N - W27	1 COB	39	3268	2700K	A+	13°	3.8	160	261	262	202
JE-30391 - M - W27	1 COB	39	2903	2700K	A+	20°	3.8	160	261	262	202
JE-30391 - W - W27	1 COB	39	2639	2700K	A+	40°	3.8	160	261	262	202
JE-30391 - VW - W27	1 COB	39	2589	2700K	A+	61°	3.8	160	261	262	202
JE-30391 - N - W30	1 COB	39	3452	3000K	A++	13°	3.8	160	261	262	202
JE-30391 - M - W30	1 COB	39	3067	3000K	A++	20°	3.8	160	261	262	202
JE-30391 - W - W30	1 COB	39	2788	3000K	A++	40°	3.8	160	261	262	202
JE-30391 - VW - W30	1 COB	39	2735	3000K	A++	61°	3.8	160	261	262	202
JE-30391 - N - W40	1 COB	39	3494	4000K	A++	13°	3.8	160	261	262	202
JE-30391 - M - W40	1 COB	39	3104	4000K	A++	20°	3.8	160	261	262	202
JE-30391 - W - W40	1 COB	39	2822	4000K	A++	40°	3.8	160	261	262	202
JE-30391 - VW - W40	1 COB	39	2768	4000K	A++	61°	3.8	160	261	262	202

Colour Code

- 01	- 02	- 03	- 05	- 06	
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014	RESET

Ordering guide sample

JE-30391 - N - W30 - DI			
Beam	Colour	Dim Type	
Colour Temperature		Dimming Type	
W27 – Warm 2700K		ND – Non dimmable	
W30 – Warm white 3000K		DI – 1-10V dimming	
W40 – Neutral white 4000K		DA – DALI dimming	

Dimming Type

ND DI DA

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Technical amendments reserved.

Jet 33

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			

Photometric

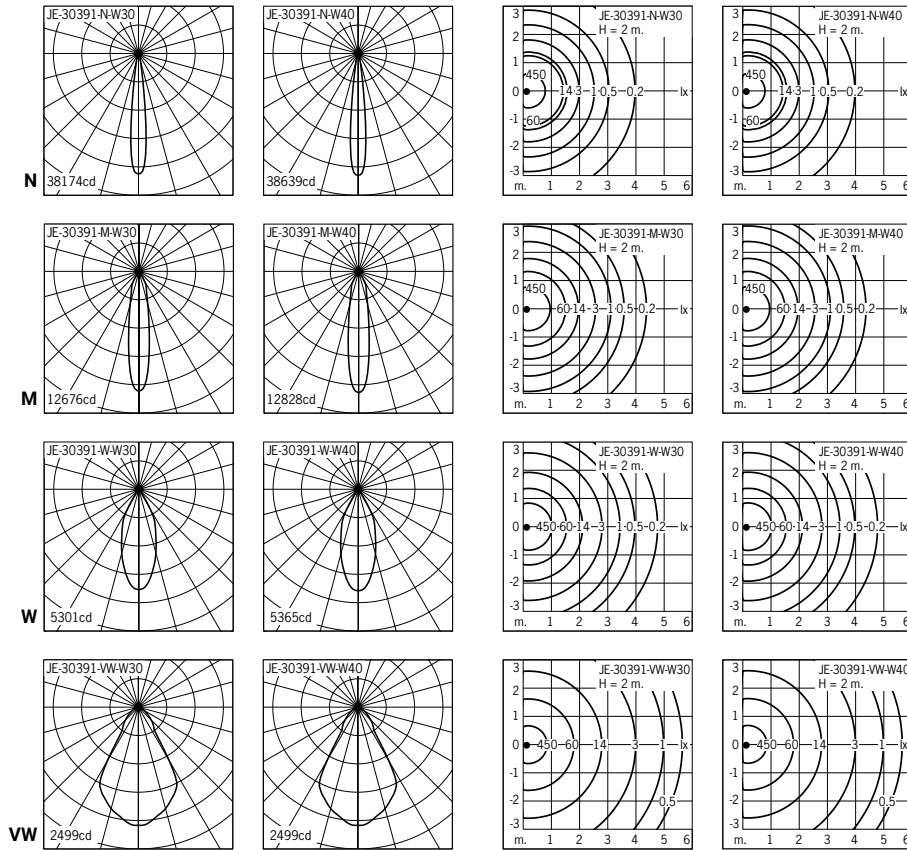

* Installation manual available online at www.ligman.com.
 * Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
 * Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.



Jet 34

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

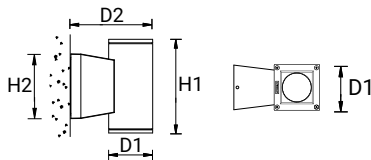

Mounting detail

Luminaire Structure


- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting




Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — W

Wide beam with symmetrical light distribution for down-light



Façade — VW

Very wide beam with symmetrical light distribution for down-light

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30411 - N - W27	1 COB	39	3268	2700K	A+	13°	5.1	160	267	263	205
JE-30411 - M - W27	1 COB	39	2903	2700K	A+	20°	5.1	160	267	263	205
JE-30411 - W - W27	1 COB	39	2639	2700K	A+	40°	5.1	160	267	263	205
JE-30411 - VW - W27	1 COB	39	2589	2700K	A+	61°	5.1	160	267	263	205
JE-30411 - N - W30	1 COB	39	3452	3000K	A++	13°	5.1	160	267	263	205
JE-30411 - M - W30	1 COB	39	3067	3000K	A++	20°	5.1	160	267	263	205
JE-30411 - W - W30	1 COB	39	2788	3000K	A++	40°	5.1	160	267	263	205
JE-30411 - VW - W30	1 COB	39	2735	3000K	A++	61°	5.1	160	267	263	205
JE-30411 - N - W40	1 COB	39	3494	4000K	A++	13°	5.1	160	267	263	205
JE-30411 - M - W40	1 COB	39	3104	4000K	A++	20°	5.1	160	267	263	205
JE-30411 - W - W40	1 COB	39	2822	4000K	A++	40°	5.1	160	267	263	205
JE-30411 - VW - W40	1 COB	39	2768	4000K	A++	61°	5.1	160	267	263	205

Colour Code

- 01	- 02	- 03	- 05	- 06	
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014	RESET

Ordering guide sample

JE-30411 - N - W30 - DI		
Beam	Colour	Dim Type
Colour Temperature W27 - Warm 2700K W30 - Warm white 3000K W40 - Neutral white 4000K		
Dimming Type ND - Non dimmable DI - 1-10V dimming DA - DALI dimming		

Dimming Type

ND DI DA

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Technical amendments reserved.

Jet 34

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			

Photometric

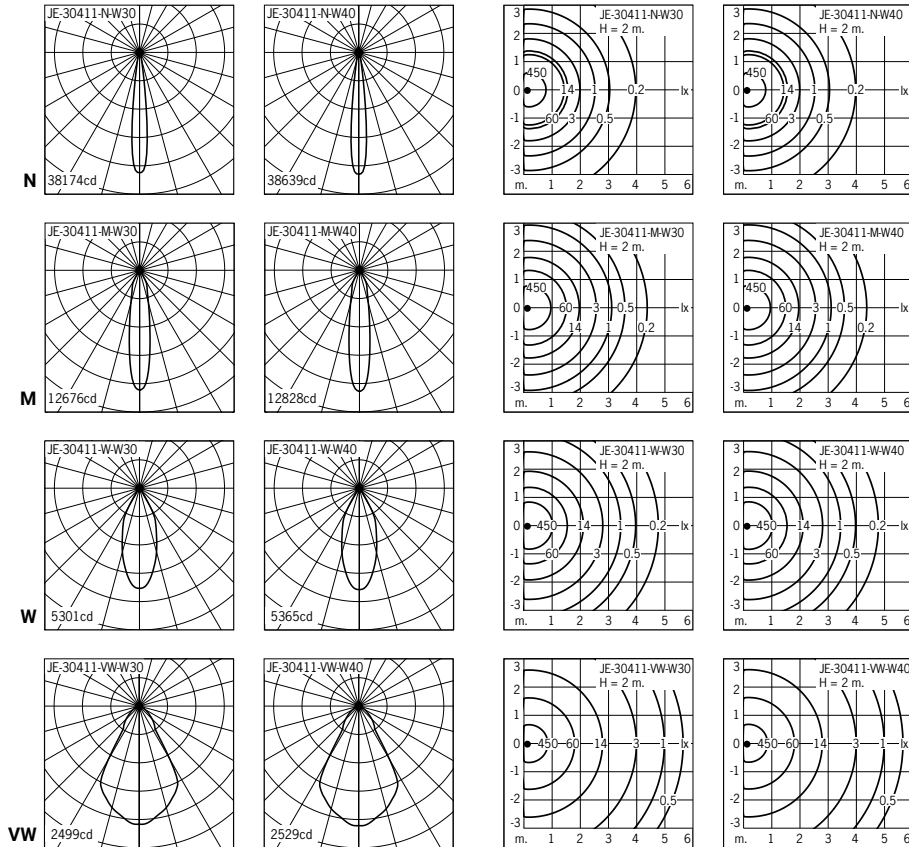

• Installation manual available online at www.ligman.com.
 • Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
 • Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.



Jet 35

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

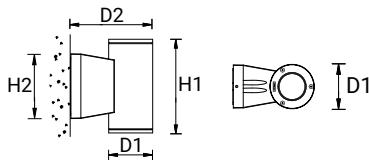

Mounting detail

Luminaire Structure


- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting




Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — W

Wide beam with symmetrical light distribution for down-light



Façade — VW

Very wide beam with symmetrical light distribution for down-light

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30341 - N - W27	2 x 1 COB	28	2043	2700K	A++	20°	2.3	102	189	218	150
JE-30341 - M - W27	2 x 1 COB	28	2057	2700K	A++	24°	2.3	102	189	218	150
JE-30341 - W - W27	2 x 1 COB	28	2043	2700K	A++	36°	2.3	102	189	218	150
JE-30341 - VW - W27	2 x 1 COB	28	1784	2700K	A++	71°	2.3	102	189	218	150
JE-30341 - N - W30	2 x 1 COB	28	2174	3000K	A++	20°	2.3	102	189	218	150
JE-30341 - M - W30	2 x 1 COB	28	2190	3000K	A++	24°	2.3	102	189	218	150
JE-30341 - W - W30	2 x 1 COB	28	2175	3000K	A++	36°	2.3	102	189	218	150
JE-30341 - VW - W30	2 x 1 COB	28	1899	3000K	A++	71°	2.3	102	189	218	150
JE-30341 - N - W40	2 x 1 COB	28	2198	4000K	A++	20°	2.3	102	189	218	150
JE-30341 - M - W40	2 x 1 COB	28	2214	4000K	A++	24°	2.3	102	189	218	150
JE-30341 - W - W40	2 x 1 COB	28	2199	4000K	A++	36°	2.3	102	189	218	150
JE-30341 - VW - W40	2 x 1 COB	28	1920	4000K	A++	71°	2.3	102	189	218	150

Colour Code

- 01	- 02	- 03	- 05	- 06	
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014	RESET

Ordering guide sample

JE-30341 - N - W30 - DI			
Beam	Colour	Dim Type	
Colour Temperature		Dimming Type	
W27 – Warm 2700K		ND – Non dimmable	
W30 – Warm white 3000K		DI – 1-10V dimming	
W40 – Neutral white 4000K		DA – DALI dimming	

Dimming Type

ND DI DA

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Technical amendments reserved.

Jet 35

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			

Photometric

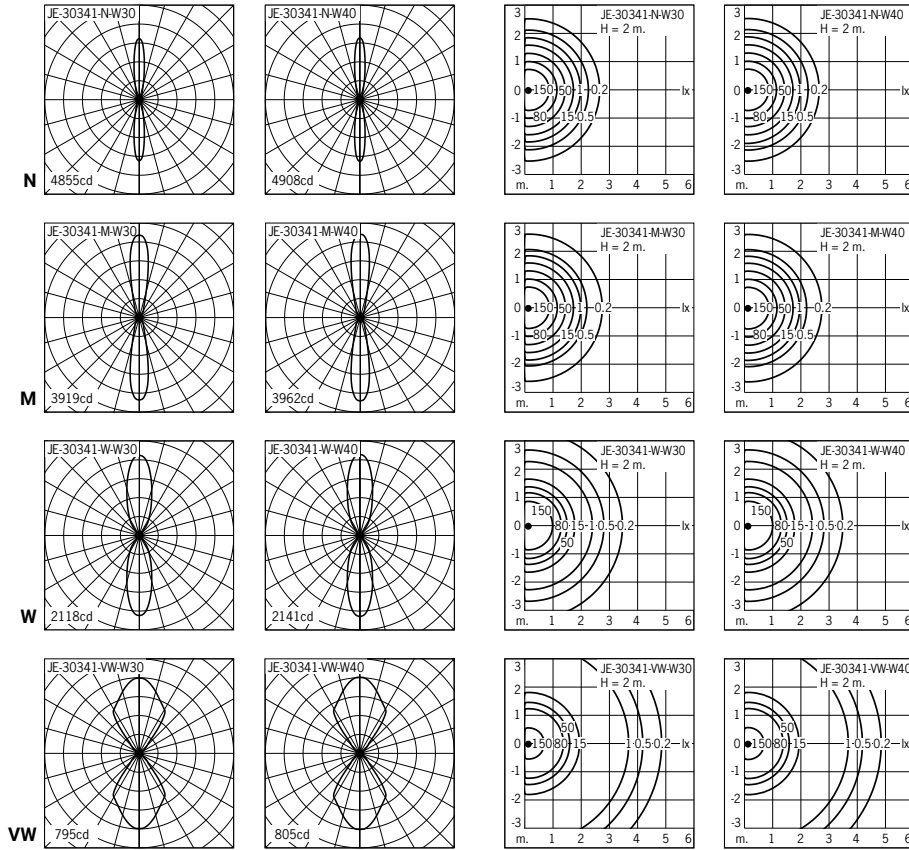

• Installation manual available online at www.ligman.com.
 • Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
 • Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.



Jet 36

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

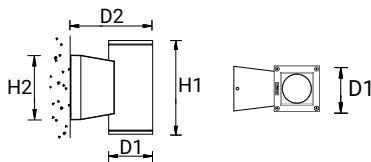

Mounting detail

Luminaire Structure

- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting




Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — W

Wide beam with symmetrical light distribution for down-light



Façade — VW

Very wide beam with symmetrical light distribution for down-light

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30361 - N - W27	2 x 1 COB	28	2043	2700K	A++	20°	2.7	102	192	218	150
JE-30361 - M - W27	2 x 1 COB	28	2057	2700K	A++	24°	2.7	102	192	218	150
JE-30361 - W - W27	2 x 1 COB	28	2043	2700K	A++	36°	2.7	102	192	218	150
JE-30361 - VW - W27	2 x 1 COB	28	1784	2700K	A++	71°	2.7	102	192	218	150
JE-30361 - N - W30	2 x 1 COB	28	2174	3000K	A++	20°	2.7	102	192	218	150
JE-30361 - M - W30	2 x 1 COB	28	2190	3000K	A++	24°	2.7	102	192	218	150
JE-30361 - W - W30	2 x 1 COB	28	2175	3000K	A++	36°	2.7	102	192	218	150
JE-30361 - VW - W30	2 x 1 COB	28	1899	3000K	A++	71°	2.7	102	192	218	150
JE-30361 - N - W40	2 x 1 COB	28	2198	4000K	A++	20°	2.7	102	192	218	150
JE-30361 - M - W40	2 x 1 COB	28	2214	4000K	A++	24°	2.7	102	192	218	150
JE-30361 - W - W40	2 x 1 COB	28	2199	4000K	A++	36°	2.7	102	192	218	150
JE-30361 - VW - W40	2 x 1 COB	28	1920	4000K	A++	71°	2.7	102	192	218	150

Colour Code

- 01	- 02	- 03	- 05	- 06	
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014	RESET

Ordering guide sample

JE-30361 - N - W30 - DI		
Beam	Colour	Dim Type
Colour Temperature W27 – Warm 2700K W30 – Warm white 3000K W40 – Neutral white 4000K		
Dimming Type ND – Non dimmable DI – 1-10V dimming DA – DALI dimming		

Dimming Type

ND DI DA

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Technical amendments reserved.

Jet 36

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			

Photometric

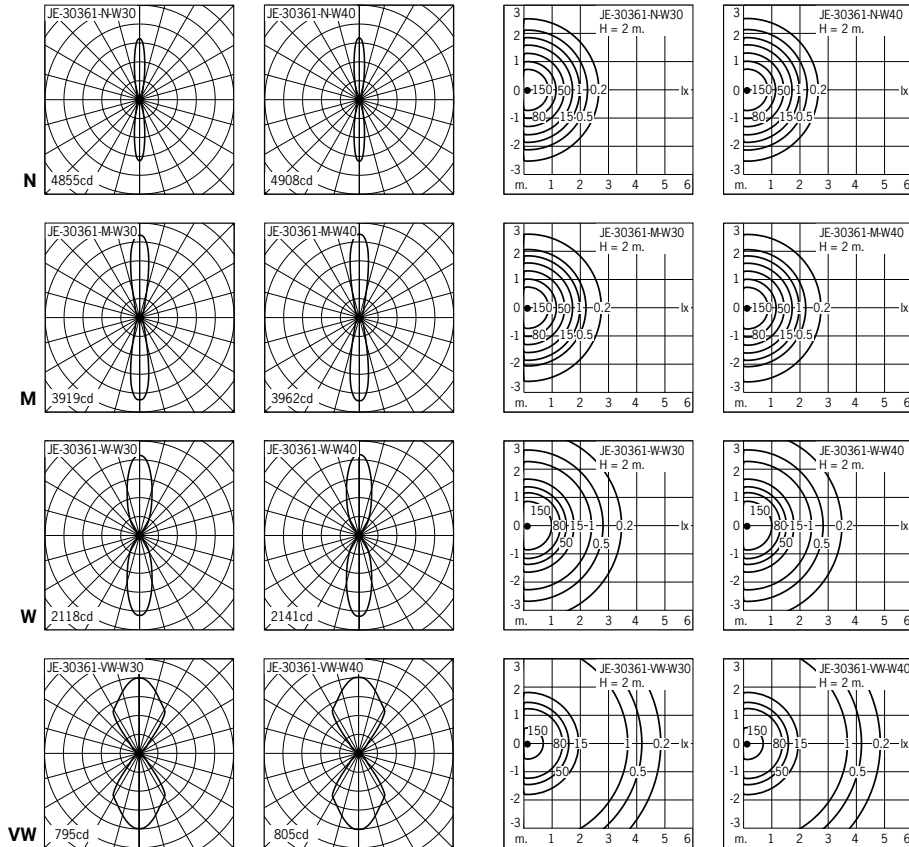

• Installation manual available online at www.ligman.com.
 • Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
 • Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.



Jet 37

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

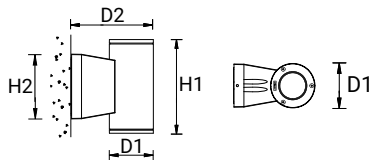

Mounting detail

Luminaire Structure


- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting




Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — W

Wide beam with symmetrical light distribution for down-light



Façade — VW

Very wide beam with symmetrical light distribution for down-light

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30381 - N - W27	2 x 1 COB	78	6535	2700K	A+	13°	5.0	160	261	262	202
JE-30381 - M - W27	2 x 1 COB	78	5806	2700K	A+	20°	5.0	160	261	262	202
JE-30381 - W - W27	2 x 1 COB	78	5278	2700K	A+	40°	5.0	160	261	262	202
JE-30381 - VW - W27	2 x 1 COB	78	5177	2700K	A+	61°	5.0	160	261	262	202
JE-30381 - N - W30	2 x 1 COB	78	6903	3000K	A++	13°	5.0	160	261	262	202
JE-30381 - M - W30	2 x 1 COB	78	6134	3000K	A++	20°	5.0	160	261	262	202
JE-30381 - W - W30	2 x 1 COB	78	5576	3000K	A++	40°	5.0	160	261	262	202
JE-30381 - VW - W30	2 x 1 COB	78	5470	3000K	A++	61°	5.0	160	261	262	202
JE-30381 - N - W40	2 x 1 COB	78	6987	4000K	A++	13°	5.0	160	261	262	202
JE-30381 - M - W40	2 x 1 COB	78	6208	4000K	A++	20°	5.0	160	261	262	202
JE-30381 - W - W40	2 x 1 COB	78	5644	4000K	A++	40°	5.0	160	261	262	202
JE-30381 - VW - W40	2 x 1 COB	78	5536	4000K	A++	61°	5.0	160	261	262	202

Colour Code

- 01	- 02	- 03	- 05	- 06	
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014	RESET

Ordering guide sample

JE-30381 - N - W30 - DI		
Beam	Colour	Dim Type
Colour Temperature W27 - Warm 2700K W30 - Warm white 3000K W40 - Neutral white 4000K		
Dimming Type ND - Non dimmable DI - 1-10V dimming DA - DALI dimming		

Dimming Type

ND DI DA

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Technical amendments reserved.

Jet 37

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			

Photometric

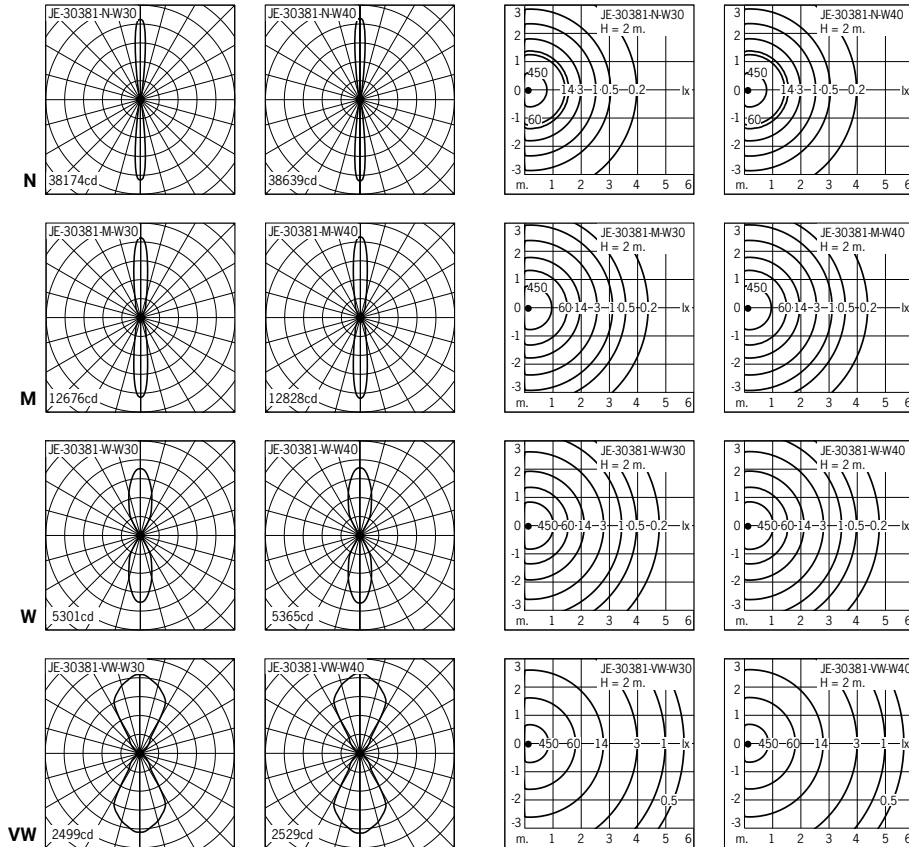

• Installation manual available online at www.ligman.com.
• Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
• Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.




Jet 38

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

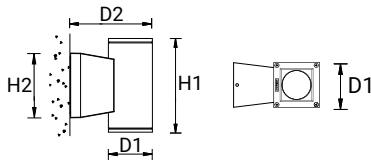

Mounting detail

Luminaire Structure


- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting




Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — W

Wide beam with symmetrical light distribution for down-light



Façade — VW

Very wide beam with symmetrical light distribution for down-light

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30401 - N - W27	2 x 1 COB	78	6535	2700K	A+	13°	6.2	160	267	263	205
JE-30401 - M - W27	2 x 1 COB	78	5806	2700K	A+	20°	6.2	160	267	263	205
JE-30401 - W - W27	2 x 1 COB	78	5278	2700K	A+	40°	6.2	160	267	263	205
JE-30401 - VW - W27	2 x 1 COB	78	5177	2700K	A+	61°	6.2	160	267	263	205
JE-30401 - N - W30	2 x 1 COB	78	6903	3000K	A++	13°	6.2	160	267	263	205
JE-30401 - M - W30	2 x 1 COB	78	6134	3000K	A++	20°	6.2	160	267	263	205
JE-30401 - W - W30	2 x 1 COB	78	5576	3000K	A++	40°	6.2	160	267	263	205
JE-30401 - VW - W30	2 x 1 COB	78	5470	3000K	A++	61°	6.2	160	267	263	205
JE-30401 - N - W40	2 x 1 COB	78	6987	4000K	A++	13°	6.2	160	267	263	205
JE-30401 - M - W40	2 x 1 COB	78	6208	4000K	A++	20°	6.2	160	267	263	205
JE-30401 - W - W40	2 x 1 COB	78	5644	4000K	A++	40°	6.2	160	267	263	205
JE-30401 - VW - W40	2 x 1 COB	78	5536	4000K	A++	61°	6.2	160	267	263	205

Colour Code

- 01	- 02	- 03	- 05	- 06	
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014	RESET

Ordering guide sample

JE-30401 - N - W30 - DI			
Beam	Colour	Dim Type	
Colour Temperature		Dimming Type	
W27 – Warm 2700K		ND – Non dimmable	
W30 – Warm white 3000K		DI – 1-10V dimming	
W40 – Neutral white 4000K		DA – DALI dimming	

Dimming Type

ND DI DA

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Technical amendments reserved.

Jet 38

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			

Photometric

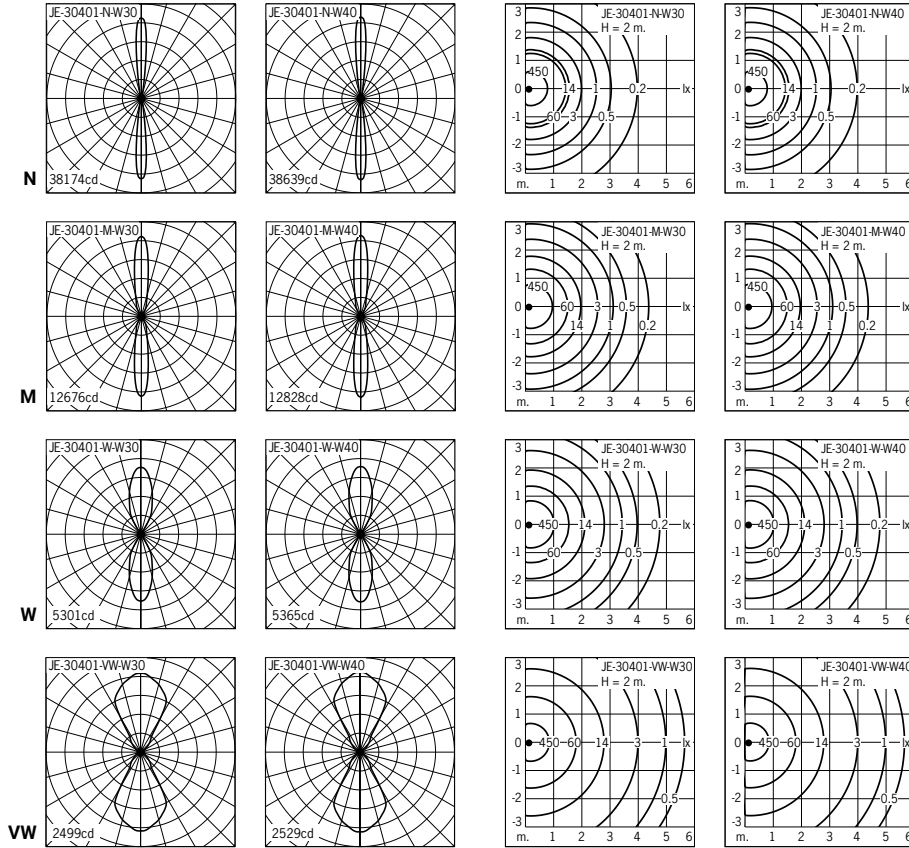

* Installation manual available online at www.ligman.com.
 * Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
 * Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.



Jet 51 RGBW

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

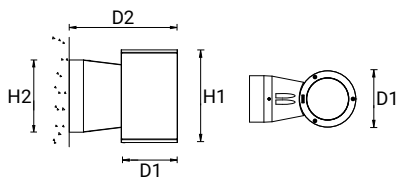

Mounting detail

Luminaire Structure

- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting



Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — E

Extra wide beam with elliptical light distribution for down-light

Ordering guide sample

JE-30393 - N - RGBW30 - A6Q491

Beam

Colour

Colour

Colour Temperature

RGBW30 – Red, Green, Blue and Warm white 3200K ±500
 RGBW40 – Red, Green, Blue and Neutral white 4000K ±300
 RGBW65 – Red, Green, Blue and Cool white 6850K ±1150

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30393 - N - RGBW	7 LED	33	1429	RGBW	A	21°	4.3	160	301	262	202
JE-30393 - M - RGBW	7 LED	33	1158	RGBW	A	35°	4.3	160	301	262	202
JE-30393 - E - RGBW	7 LED	33	1119	RGBW	A	26° x 48°	4.3	160	301	262	202

DMX Accessory


SLESA-U9
(A60491)

SLESA-UE7
(A60691)

STICK-KE1
(A60791)







Colour Temperature

RGBW30

RGBW40

RGBW65

Photometric



Colour Code

- 01

- 02

- 03

- 05

- 06

Black
RAL 9011

Dark Grey
RAL 7043

White
RAL 9003

Matt Silver
RAL 9006

Bronze
RAL 6014

RESET

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
 www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
 sales.uk@ligman.com

Technical amendments reserved.



Jet 52 RGBW

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

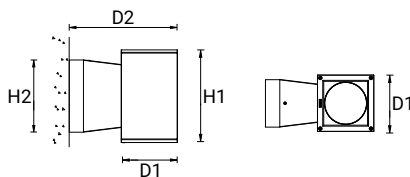

Mounting detail

Luminaire Structure

- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting



Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — E

Extra wide beam with elliptical light distribution for down-light

Ordering guide sample

JE-30413 - N - RGBW30 - A6Q491

Beam Colour Colour

Colour Temperature

RGBW30 – Red, Green, Blue and Warm white 3200K ±500
 RGBW40 – Red, Green, Blue and Neutral white 4000K ±300
 RGBW65 – Red, Green, Blue and Cool white 6850K ±1150

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30413 - N - RGBW	7 LED	33	1429	RGBW	A	21°	5.6	160	307	263	205
JE-30413 - M - RGBW	7 LED	33	1158	RGBW	A	35°	5.6	160	307	263	205
JE-30413 - E - RGBW	7 LED	33	1119	RGBW	A	26° x 48°	5.6	160	307	263	205

DMX Accessory


SLESA-U9
(A60491)

SLESA-UE7
(A60691)

STICK-KE1
(A60791)







Colour Temperature

RGBW30

RGBW40

RGBW65

Photometric



Colour Code

- 01

- 02

- 03

- 05

- 06

Black
RAL 9011

Dark Grey
RAL 7043

White
RAL 9003

Matt Silver
RAL 9006

Bronze
RAL 6014

RESET

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
 www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
 sales.uk@ligman.com

Technical amendments reserved.



Jet 53 RGBW

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

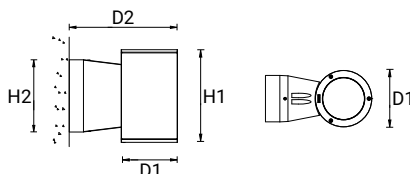

Mounting detail

Luminaire Structure


- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting



Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — E

Extra wide beam with elliptical light distribution for down-light

Ordering guide sample

JE-30383 - N - RGBW30 - A6Q491

Beam

Colour

Colour

Colour Temperature

RGBW30 – Red, Green, Blue and Warm white 3200K ±500
 RGBW40 – Red, Green, Blue and Neutral white 4000K ±300
 RGBW65 – Red, Green, Blue and Cool white 6850K ±1150

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30383 - N - RGBW	2 X 7 LED	66	2857	RGBW	A	21°	5.3	160	301	262	202
JE-30383 - M - RGBW	2 X 7 LED	66	2316	RGBW	A	35°	5.3	160	301	262	202
JE-30383 - E - RGBW	2 X 7 LED	66	2238	RGBW	A	26° x 48°	5.3	160	301	262	202

DMX Accessory


SLESA-U9
(A60491)

SLESA-UE7
(A60691)

STICK-KE1
(A60791)



Colour Temperature

RGBW30



RGBW40

RGBW65



Photometric



N



M



E

Colour Code

- 01

- 02

- 03

- 05

- 06

Black
RAL 9011

Dark Grey
RAL 7043

White
RAL 9003

Matt Silver
RAL 9006

Bronze
RAL 6014

RESET

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
 www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
 sales.uk@ligman.com

Technical amendments reserved.




Jet 54 RGBW

Surface wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Cylindrical or rectangular form surface wall-mounted downlight. High performance, high output and numerous options ensure Jet can be configured for any application.

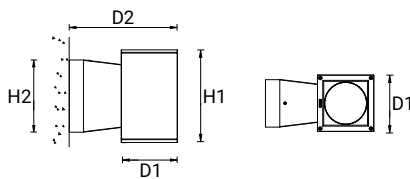

Mounting detail

Luminaire Structure

- Low copper content die-cast aluminium housing.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket.
- High efficiency optical reflector.
- Clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Façade — N

Narrow beam with symmetrical light distribution for accent lighting



Façade — M

Medium beam with symmetrical light distribution for accent lighting



Façade — E

Extra wide beam with elliptical light distribution for down-light

Ordering guide sample

JE-30403 - N - RGBW30 - A6Q491

Beam

Colour

Colour

Colour Temperature

RGBW30 – Red, Green, Blue and Warm white 3200K ±500
 RGBW40 – Red, Green, Blue and Neutral white 4000K ±300
 RGBW65 – Red, Green, Blue and Cool white 6850K ±1150

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle	Weight kg	Dimension			
								D1	D2	H1	H2
JE-30403 - N - RGBW	2 X 7 LED	66	2857	RGBW	A	21°	6.7	160	307	263	205
JE-30403 - M - RGBW	2 X 7 LED	66	2316	RGBW	A	35°	6.7	160	307	263	205
JE-30403 - E - RGBW	2 X 7 LED	66	2238	RGBW	A	26° x 48°	6.7	160	307	263	205

DMX Accessory


SLESA-U9
(A60491)

SLESA-UE7
(A60691)

STICK-KE1
(A60791)



Colour Temperature

RGBW30



RGBW40

RGBW65



Photometric



N



M



E

Colour Code

- 01

- 02

- 03

- 05

- 06

Black
RAL 9011

Dark Grey
RAL 7043

White
RAL 9003

Matt Silver
RAL 9006

Bronze
RAL 6014

RESET

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
 VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
 Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
 www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co., Ltd.
 17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
 Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
 Victory Way | Crossways | Dartford DA2 6QD |
 United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
 sales.uk@ligman.com

Technical amendments reserved.