

# SQUARE, STRAIGHT ALUMINIUM LIGHTING POLES

- Manufacturing process is in accordance with EN40 standard
- Pre-treated and coated by the high-quality, UV-resistant, powder coating for ensuring high corrosion resistance
- Material: Aluminium
- Form: Square, straight
- Installing options: Mounting base or anchor bolts on a foundation
- Height options: 2.5 m, 3 m, 3.5 m, 4 m, 5 m, 5.5 m, 6 m
- Diameter/dimension options: 100x100 mm
- Spigot options: 76 mm

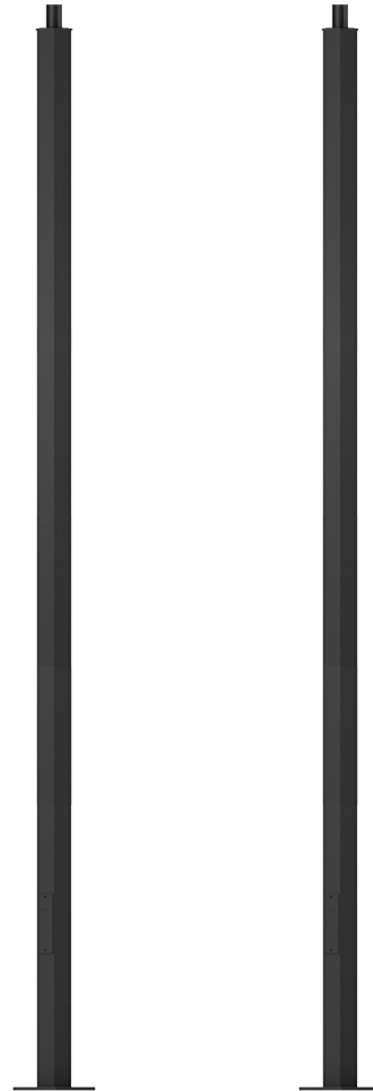
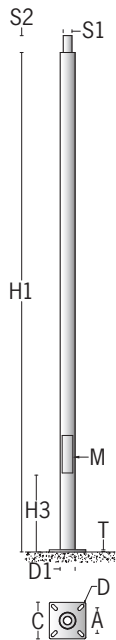


Illustration 1 (SC60)

Illustration 2 (SC76)

We reserve the right to make technical and design changes.

Edition: 08-06-2020

<https://www.ligman.com/square-straight-aluminium-lighting-poles-poles-ssa-p2/>

#### EUROPE

LIGMAN EUROPE s.r.o.  
VGP Park Ústí nad Labem,  
P 2 120  
40317 Přestanov  
Czech Republic  
Tel. +420 477 071 500  
[sales.cz@ligman.com](mailto:sales.cz@ligman.com)

#### ASIA PACIFIC

LIGMAN Lighting Co.,Ltd  
17/2 Moo4 Monthong  
Bangnampreaw  
24150, Chachoengsao  
Thailand  
Tel. +66 2 108 6700  
[info@ligman.com](mailto:info@ligman.com)

# SQUARE, STRAIGHT ALUMINIUM LIGHTING POLES




Illustration	Model No.	Pole						Base				Thickness (mm.)	Weight (kg.)	Root mount kit	Circuit breaker box IP44
		H1	H3	S1	S2	D1	M	A	C	T	D			A20491	A21291
1	APC-125102-SC60	2500	600	60	89	102x102	75x310	160-200	250	15	22x50	3.2	12.2	•	•
	APC-130102-SC60	3000	600	60	89	102x102	75x310	160-200	250	15	22x50	3.2	14.1	•	•
	APC-135102-SC60	3500	600	60	89	102x102	75x310	160-200	250	15	22x50	3.2	16.0	•	•
	APC-140102-SC60	4000	600	60	89	102x102	75x310	160-200	250	15	22x50	3.2	17.8	•	•
	APC-150102-SC60	5000	600	60	89	102x102	75x310	160-200	250	15	22x50	3.2	21.5	•	•
	APC-155102-SC60	5500	600	60	89	102x102	75x310	160-200	250	15	22x50	3.2	23.4	•	•
	APC-160102-SC60	6000	600	60	89	102x102	75x310	160-200	250	15	22x50	3.2	25.3	•	•
2	APC-125102-SC76	2500	600	76	89	102x102	75x310	160-200	250	15	22x50	3.2	12.2	•	•
	APC-130102-SC76	3000	600	76	89	102x102	75x310	160-200	250	15	22x50	3.2	14.1	•	•
	APC-135102-SC76	3500	600	76	89	102x102	75x310	160-200	250	15	22x50	3.2	16.0	•	•
	APC-140102-SC76	4000	600	76	89	102x102	75x310	160-200	250	15	22x50	3.2	17.8	•	•
	APC-150102-SC76	5000	600	76	89	102x102	75x310	160-200	250	15	22x50	3.2	21.5	•	•
	APC-155102-SC76	5500	600	76	89	102x102	75x310	160-200	250	15	22x50	3.2	23.4	•	•
	APC-160102-SC76	6000	600	76	89	102x102	75x310	160-200	250	15	22x50	3.2	25.3	•	•

# SQUARE, STRAIGHT ALUMINIUM LIGHTING POLES




Cylindrical, straight aluminium lighting poles

[www.ligman.com/cylindrical-straight-aluminium-lighting-poles-poles-csa-p2/](http://www.ligman.com/cylindrical-straight-aluminium-lighting-poles-poles-csa-p2/)



Cylindrical, straight galvanised steel lighting poles

[www.ligman.com/cylindrical-straight-galvanised-steel-lighting-poles-poles-csg-p2/](http://www.ligman.com/cylindrical-straight-galvanised-steel-lighting-poles-poles-csg-p2/)



Square, straight galvanised steel lighting poles

[www.ligman.com/square-straight-galvanised-steel-lighting-poles-poles-ssg-p2/](http://www.ligman.com/square-straight-galvanised-steel-lighting-poles-poles-ssg-p2/)



Cylindrical, stepped galvanised steel lighting poles

[www.ligman.com/cylindrical-stepped-galvanised-steel-lighting-poles-poles-cssg-p2/](http://www.ligman.com/cylindrical-stepped-galvanised-steel-lighting-poles-poles-cssg-p2/)



Cylindrical, tapered, galvanised steel lighting poles

[www.ligman.com/cylindrical-tapered-galvanised-steel-lighting-poles-poles-ctg-p2/](http://www.ligman.com/cylindrical-tapered-galvanised-steel-lighting-poles-poles-ctg-p2/)