
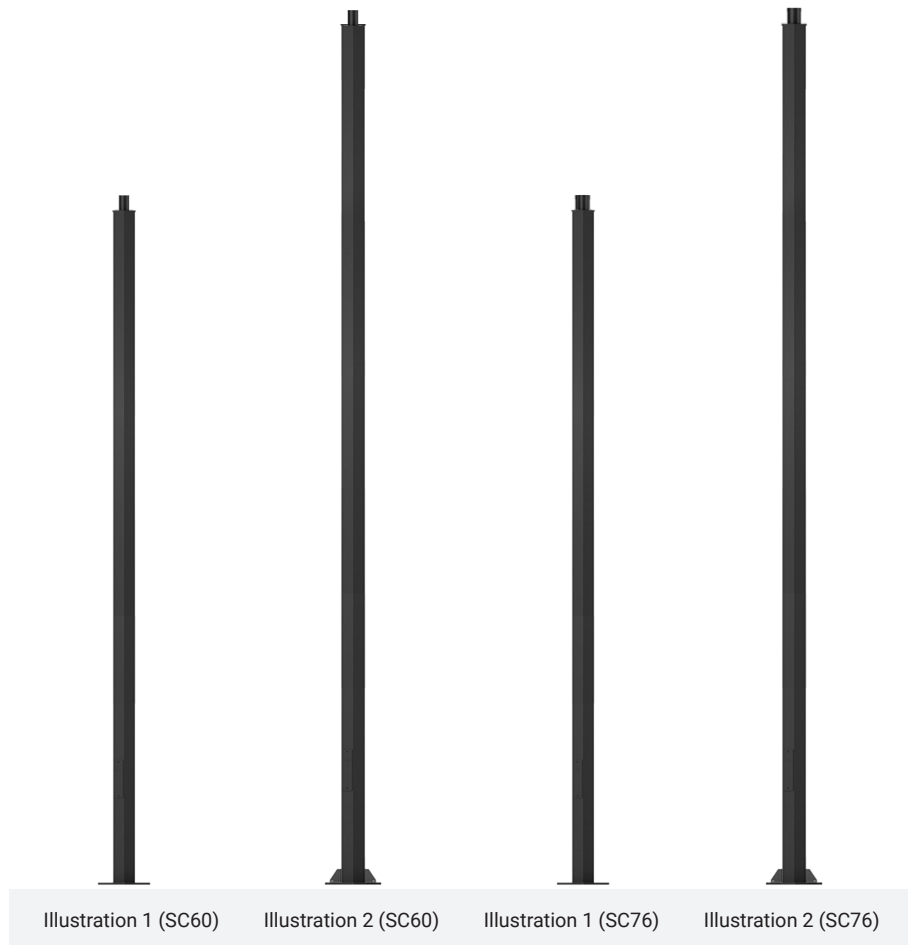


SQUARE, STRAIGHT GALVANISED STEEL LIGHTING POLES

- Manufacturing process is in accordance with EN40 standard
- Pre-treated and coated by the high-quality, UV-resistant, powder coating for ensuring high corrosion resistance
- Material: Galvanised steel
- Form: Square, straight
- Installing options: Mounting base or anchor bolts on a foundation
- Height options: 2.5 m, 3 m, 3.5 m, 4 m, 5 m, 5.5 m, 6 m
- Diameter/dimension options: 100x100 mm
- Spigot options: 76 mm

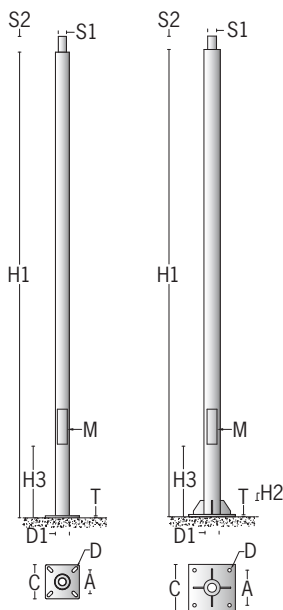

We reserve the right to make technical and design changes.

Edition: 08-06-2020

<https://www.ligman.com/square-straight-galvanised-steel-lighting-poles-ssg-p2/>

EUROPE
 LIGMAN EUROPE s.r.o.
 VGP Park Ústí nad Labem,
 P 2 120
 40317 Přestanov
 Czech Republic
 Tel. +420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
 LIGMAN Lighting Co.,Ltd
 17/2 Moo4 Monthong
 Bangnampreaw
 24150, Chachoengsao
 Thailand
 Tel. +66 2 108 6700
info@ligman.com

SQUARE, STRAIGHT GALVANISED STEEL LIGHTING POLES




Illustration	Model No.	Pole							Base				Thickness (mm.)	Weight (kg.)	Root mount kit		Circuit breaker box IP44
		H1	H2	H3	S1	S2	D1	M	A	C	T	D			A20491	A21191	
1	SPC-125100-SC60	2500	—	600	60	89	100x100	75x310	160-200	250	15	22x50	3.2	31.1	•		•
	SPC-130100-SC60	3000	—	600	60	89	100x100	75x310	160-200	250	15	22x50	3.2	35.6	•		•
	SPC-135100-SC60	3500	—	600	60	89	100x100	75x310	160-200	250	15	22x50	3.2	40.2	•		•
	SPC-140100-SC60	4000	—	600	60	89	100x100	75x310	160-200	250	15	22x50	3.2	44.8	•		•
	SPC-150100-SC60	5000	—	600	60	89	100x100	75x310	160-200	250	15	22x50	3.2	54.0	•		•
	SPC-155100-SC60	5500	—	600	60	89	100x100	75x310	160-200	250	15	22x50	3.2	58.5	•		•
	SPC-160100-SC60	6000	—	600	60	89	100x100	75x310	160-200	250	15	22x50	3.2	63.1	•		•
2	SPC-170125-SC60	7000	95	600	60	89	125x125	75x310	300	400	20	30	3.2	112.7	•		•
	SPC-180125-SC60	8000	95	600	60	89	125x125	75x310	300	400	20	30	3.2	125.0	•		•
1	SPC-125100-SC76	2500	—	600	76	89	100x100	75x310	160-200	250	15	22x50	3.2	31.1	•		•
	SPC-130100-SC76	3000	—	600	76	89	100x100	75x310	160-200	250	15	22x50	3.2	35.6	•		•
	SPC-135100-SC76	3500	—	600	76	89	100x100	75x310	160-200	250	15	22x50	3.2	40.2	•		•
	SPC-140100-SC76	4000	—	600	76	89	100x100	75x310	160-200	250	15	22x50	3.2	44.8	•		•
	SPC-150100-SC76	5000	—	600	76	89	100x100	75x310	160-200	250	15	22x50	3.2	54.0	•		•
	SPC-155100-SC76	5500	—	600	76	89	100x100	75x310	160-200	250	15	22x50	3.2	58.5	•		•
	SPC-160100-SC76	6000	—	600	76	89	100x100	75x310	160-200	250	15	22x50	3.2	63.1	•		•
2	SPC-170125-SC76	7000	95	600	76	89	125x125	75x310	300	400	20	30	3.2	112.7	•		•
	SPC-180125-SC76	8000	95	600	76	89	125x125	75x310	300	400	20	30	3.2	125.0	•		•

SQUARE, STRAIGHT GALVANISED STEEL LIGHTING POLES




Cylindrical, straight aluminium lighting poles

www.ligman.com/cylindrical-straight-aluminium-lighting-poles-poles-csa-p2/

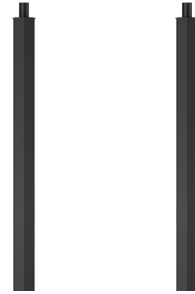

Square, straight aluminium lighting poles

www.ligman.com/square-straight-aluminium-lighting-poles-poles-ssa-p2/

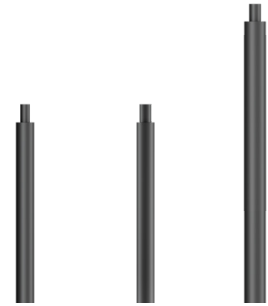

Cylindrical, straight galvanised steel lighting poles

www.ligman.com/cylindrical-straight-galvanised-steel-lighting-poles-poles-csg-p2/



Cylindrical, stepped galvanised steel lighting poles

www.ligman.com/cylindrical-stepped-galvanised-steel-lighting-poles-poles-cssg-p2/



Cylindrical, tapered, galvanised steel lighting poles

www.ligman.com/cylindrical-tapered-galvanised-steel-lighting-poles-poles-ctg-p2/