

SE TEC 03B/03N/03P

Emergency recessed ceiling installation



- Discreet and elegant emergency light for flush ceiling mounting.
- Minimum mounting height of only 43.5 mm (above the suspended ceiling).
- Aesthetically designed to match our range of detectors for a cohesive installation.
- Applications: Bathrooms and toilets, kitchens, hallways, lobbies, offices, classrooms, and any space such as homes, offices, schools, shopping centers, hospitals, hotels, restaurants, etc.


- Very low power consumption with switched-mode power supply.
- Available in white, black, and gray.
- High-power LED.
- Replacement battery SE TEC BAT.
 - 1-hour runtime
 - 4.8V/750 mAh Ni-Cd battery
 - IP20/IK04 protection rating

Technical specifications

REFERENCE	SE TEC 03B	SE TEC 03N	SE TEC 03P
Lamp type		LED	
Supply voltage		230 V-	
Self consuption		< 1 W	
Frequency (Hz)		50 Hz	
Color	White	Black	Grey
Material		PC + ABS. self-extinguishing	
Autonomy		1 H	
Operation type		Non permanent	
Test mode		Manual	
Battery		Ni-Cd 4.8V/750mAh	
Installation		Recessed ceiling installation	
Color temperature		5700 K	
Luminous flux		170 lm	
Operating temperature (°C) (min)		-5°C	
Operating temperature (°C) (max)		35°C	
Impact resistance		IK07	
Protection degree		IP40	
Isolation class		Class II	
According to		UNE 60598-2-22	

Supply battery SE TEC BAT

Dimensions

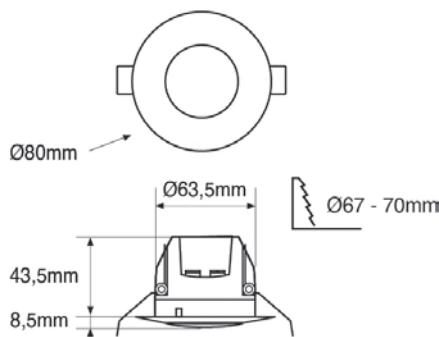

Installaton diagram

