


# URSA AIR

## Alu-Alu P5858



DoP 34AIR32AK0B16091

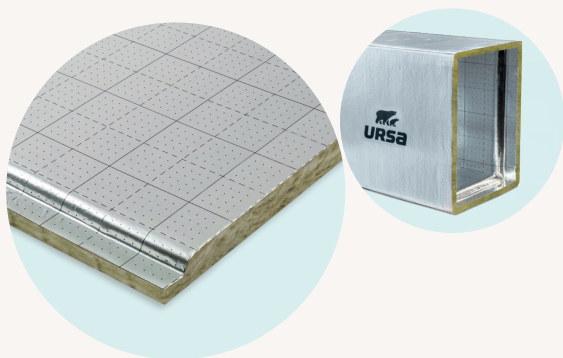

0099/CPD/A43/0294 020/003540

Nº 1515072-1

URSA AIR high density mineral glass wool boards, compliant EN 14.303 standard, faced by one side by a reinforced aluminium Kraft layer, and faced by the other side by a marked Kraft aluminium. Long edges dispose of a male – female shi lap system.  
**Suggested applications**  
Construction of pre-insulated HVAC ducts.

Panneau de laine minérale de verre URSA AIR de haute densité, conforme à la norme EN 14.303, revêtu sur une face d'un aluminium kraft renforcé, et sur l'autre face d'un aluminium kraft quadrillé. Les côtés longs ont un système d'assemblage feuilluré.  
**Applications recommandées**  
Construction des gaines de climatisation pré-isolées.

Panel de lana mineral de vidrio URSA AIR de alta densidad, de acuerdo a la normativa EN 14.303, revestido por una cara con un complejo Kraft aluminio reforzado, y por la otra cara por un complejo Kraft aluminio con marcas cuadrículadas. Los lados largos presentan un sistema de mecanizado machihembrado.  
**Aplicaciones recomendadas**  
Construcción de conductos de climatización pre-aislados.

| Characteristics Caractéristiques Características                                                                                          | Standard Norme Norma | Value Valeur Valor                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------------------------------------------------------------------|
| Designation code Code de désignation Código designación                                                                                   |                      | MW- EN 14303-T5-MV1                                                              |
| Thermal Conductivity ( $\lambda_{90/90}$ )<br>Conductivité Thermique ( $\lambda_{90/90}$ )<br>Conductividad Térmica ( $\lambda_{90/90}$ ) | EN 12667<br>EN 12939 | 10°C - 0,032 W/mK<br>24°C - 0,034 W/mK<br>40°C - 0,036 W/mK<br>60°C - 0,038 W/mK |
| Reaction to fire<br>Classement feu<br>Reacción al fuego (Euroclases)                                                                      | EN 13501-1           | B s1 d0                                                                          |
| Steam Resistance<br>Résistance à la vapeur d'eau<br>Resistencia a la difusión del vapor de agua (Z)                                       | EN 12086             | MV1 - 148,15 m²h Pa/mg                                                           |

| Code<br>Code<br>Código | Format<br>Format<br>Formato | Thickness<br>Épaisseur<br>Espesor | Width<br>Largeur<br>Ancho | Length<br>Longueur<br>Longitud | Thermal resistance<br>Résistance thermique<br>Resistencia térmica | Logistic<br>Logistique<br>Logística | Boards / box<br>Panneaux / carton<br>Paneles / caja | m² / box<br>m² / carton<br>m² / caja | Boxes / pallet<br>Cartons / palette<br>Cajas / palé | m² / pallet<br>m² / palette<br>m² / palé |
|------------------------|-----------------------------|-----------------------------------|---------------------------|--------------------------------|-------------------------------------------------------------------|-------------------------------------|-----------------------------------------------------|--------------------------------------|-----------------------------------------------------|------------------------------------------|
|                        |                             | mm                                | m                         | m                              | m²·K/W                                                            |                                     |                                                     |                                      |                                                     |                                          |
| 2075014                | Box                         | 25                                | 1,20                      | 3,00                           | 0,78 at 10°C                                                      | S                                   | 6                                                   | 21,60                                | 7                                                   | 151,20                                   |
| 2138646                | Box                         | 25                                | 1,20                      | 2,90                           | 0,78 at 10°C                                                      | NS                                  | 6                                                   | 20,88                                | 7                                                   | 146,16                                   |



Code 2138646 - pallet size specially developed in order to optimize volume and transport costs in maritime exports.

Code 2138646 - palette développée spécialement pour optimiser le volume et le coût de transport aux exportations maritimes.

Código 2138646 - palé con dimensiones especiales para optimizar el volumen y el coste de transporte en las exportaciones marítimas.