

Hawa Concepta III 25/35 Push

Die Dokumente "Produktinformation" (51249) und «Sicherheitshinweise» (22991) sind Bestandteile dieser Montageanleitung.
Es gelten metrische Abmessungen – Zollangaben sind nur zur Information.
Anleitungen aufbewahren, Ersatz unter www.hawa.com.
Werkstoffe, Zubehör und Verpackung einer umweltgerechten Wiederverwertung zuführen.
Halten Sie einen ausreichenden Abstand zu den gekennzeichneten Bereichen ein, wenn Sie einen Herzschrittmacher oder implantierten Defibrillator tragen.
Siehe auch Sicherheitshinweis 30267.

FR Les documents "Information produit" (51249) et "Consignes de sécurité" (22991) font partie intégrante de

Les dimensions métriques s'appliquent – les spécifications en pouces ne sont données qu'à titre indicatif.

Conserver les instructions, remplacement sur www.hawa.com.

Les matériaux, les accessoires et les emballages doivent être acheminés vers une filière de recyclage dans le respect de l'environnement.

Restez à une distance suffisante des zones signalées si vous portez un stimulateur cardiaque ou un

défibrillateur implantable. Voir aussi les consignes de sécurité 30267.

EN The documents "Product information" (51249) and "Safety instructions" (22991) are part of these installation

Metric measurements apply – those in inches are for information only.

Retain the instructions. Replacements available from www.hawa.com.

Recycle materials, accessories and packaging in an environmentally friendly manner.

Keep a sufficient distance away from the marked areas if you have a pacemaker or an implanted

See also safety instructions 30267.

I documenti "Informazioni sul prodotto" (51249) e "Istruzioni di sicurezza" (22991) fanno parte di queste

istruzioni di installazione. Valgono le dimensioni metriche – i dati imperiali sono fomiti solo a titolo informativo.

Conservare le istruzioni. In caso di perdita, possono essere scaricate in www.hawa.com. Ricidare materiali, accessori e imballaggi in modo ecologico.

Se avete un pacemaker o un defibrillatore impiantato, mantenetevi a distanza sufficiente dalle aree indicate.

Vedere anche le istruzioni di sicurezza 30267. ES Los documentos "Información sobre el producto" (51249) e "Instrucciones de seguridad" (22991) forman


parte de estas instrucciones de Montaje. Las dimensiones corresponden al sistema métrico – las medidas en pulgadas se indican solo a título

Conserve estas instrucciones. Si necesita reponerlas, visite www.hawa.com. Deposite en un punto de reciclaje adecuado los diversos materiales, los accesorios y el embalaje. Si lleva implantado un marcapasos o un desfibrilador, manténgase a suficiente distancia de las zonas

señalizadas.

Véanse también las instrucciones de seguridad 30267.



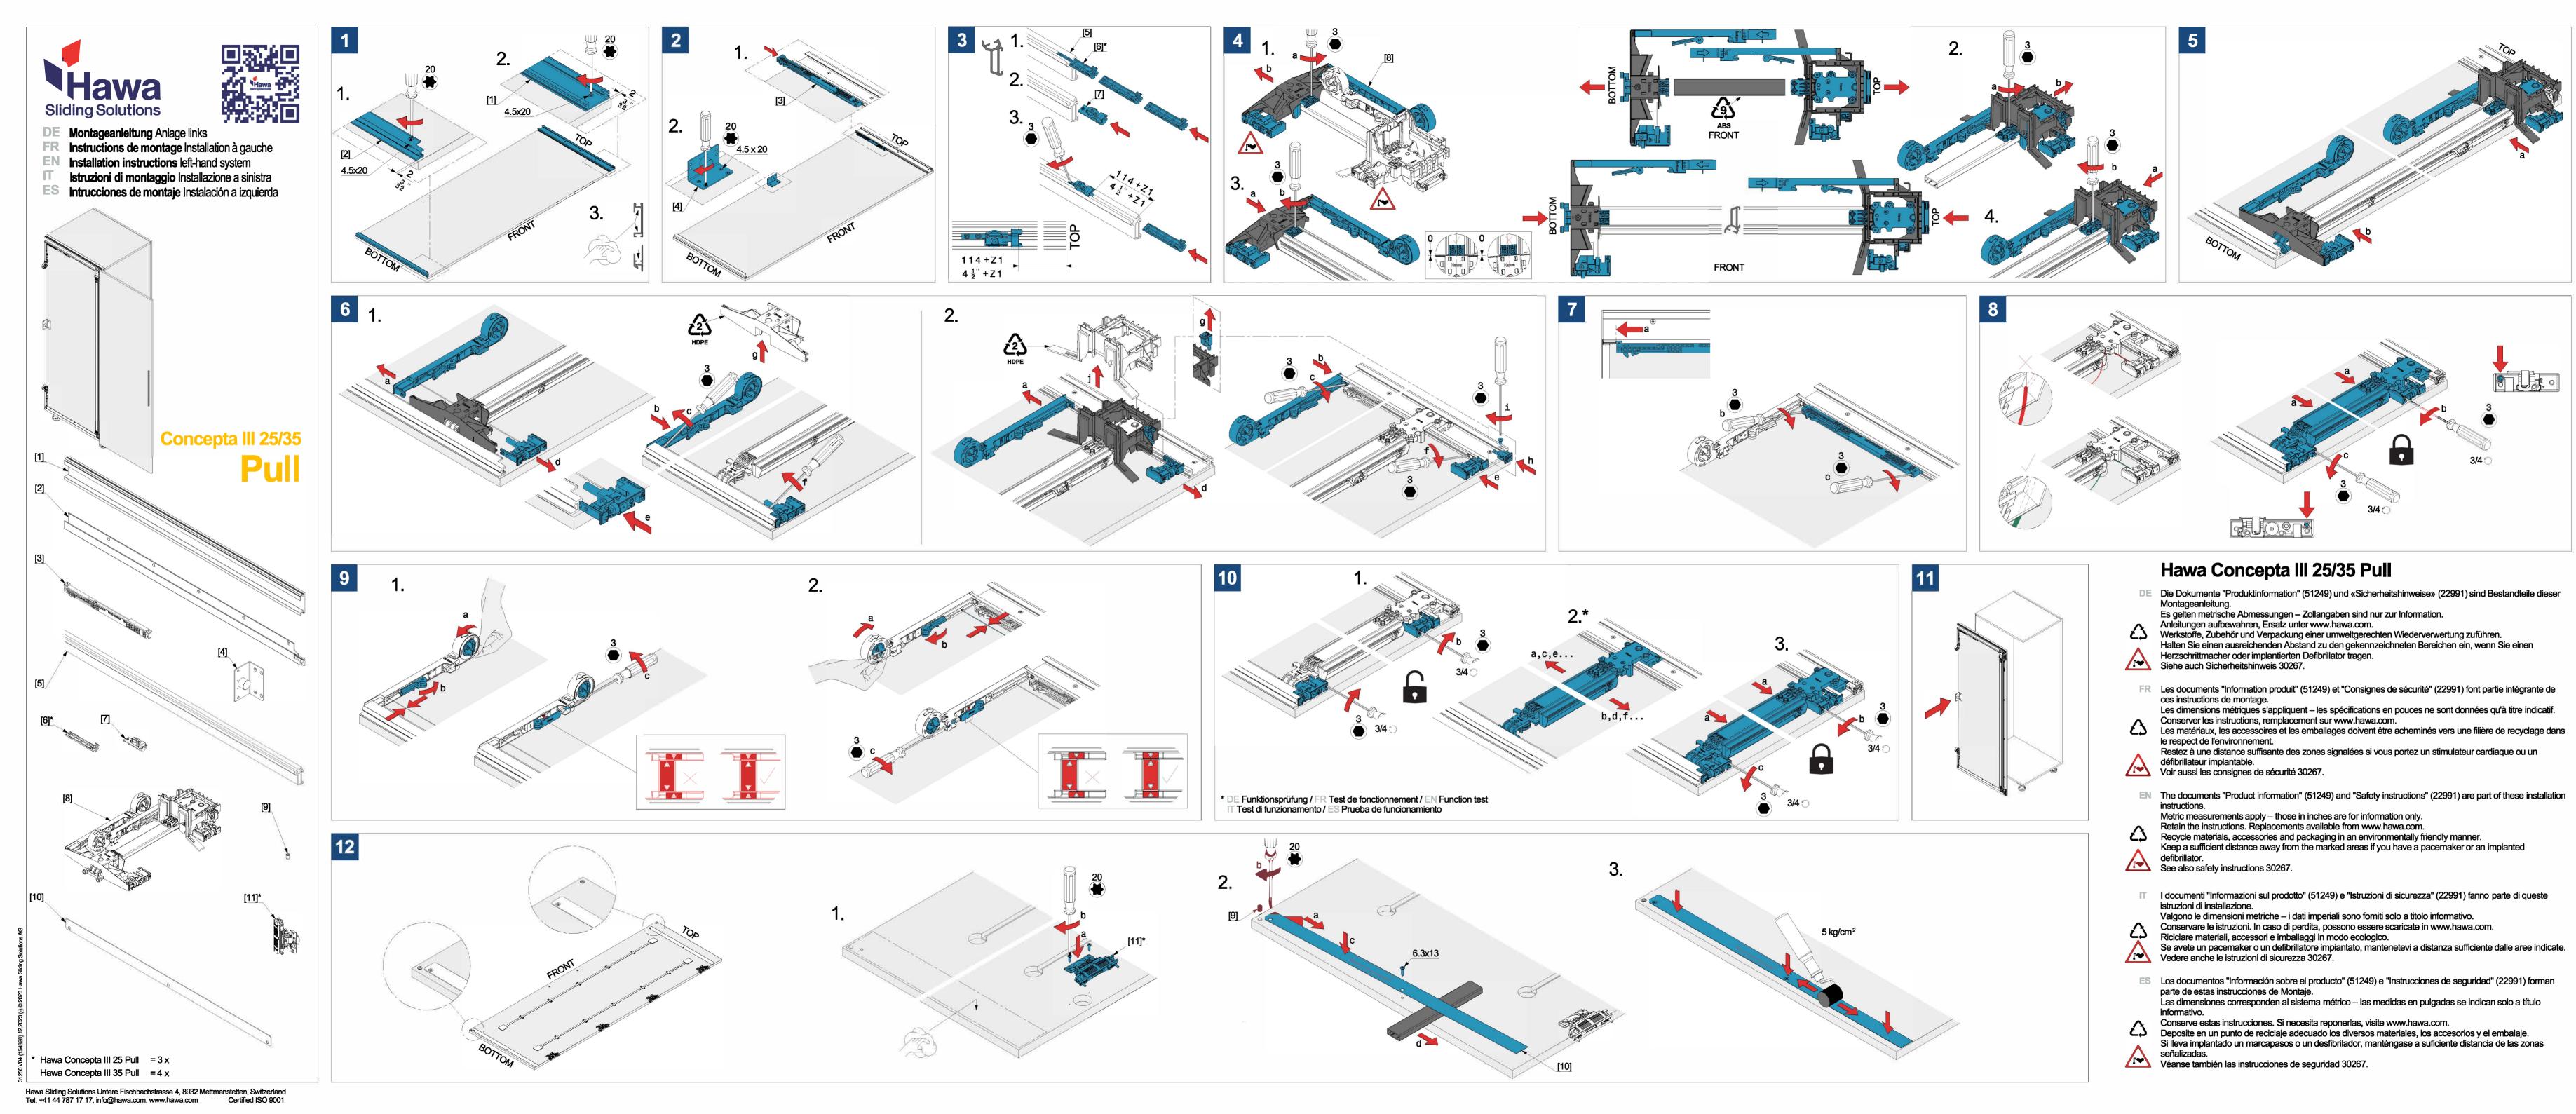




Hawa Concepta III 25/35 Push/Pull


- DE Montage am Bau und Justieranleitung Anlage links
- FR Montage sur site et instructions de réglage Installation à gauche
- Installation on buildings and adjustment instructions left-hand system


 Montaggio sull'edificio e istruzioni per la regolazione Installazione a sinistra


 Instrucciones de montaje y ajuste en el lugar de instalación Instalación a izquierda







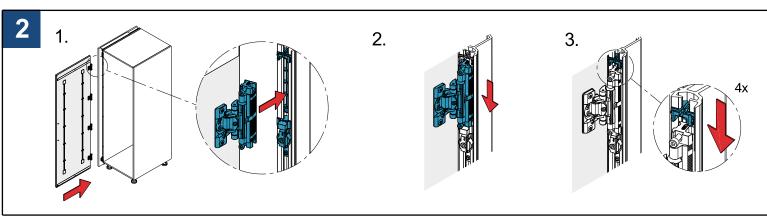





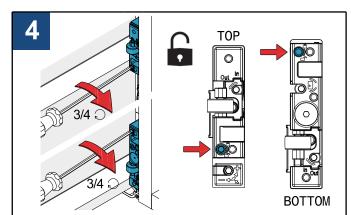


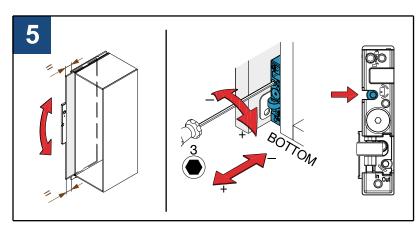


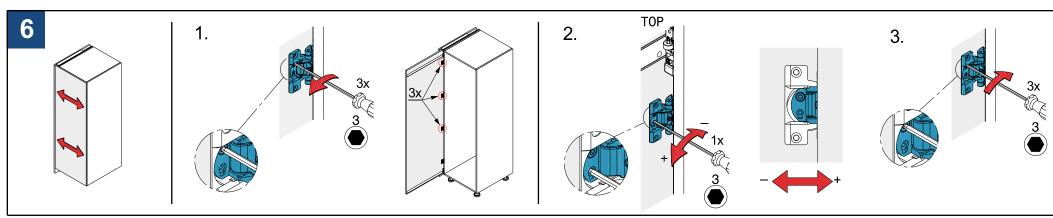


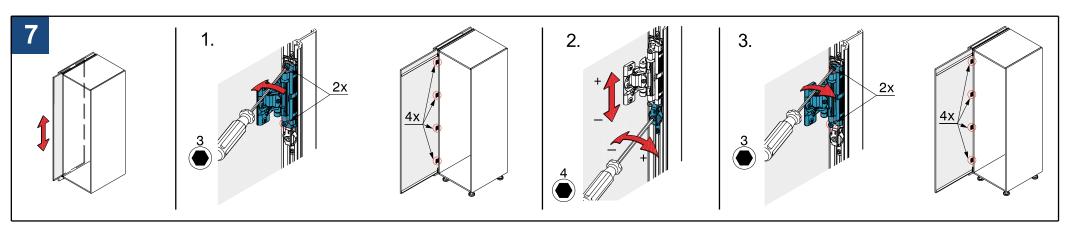

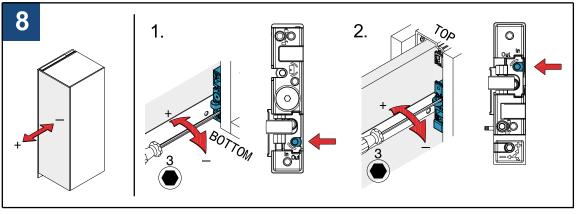

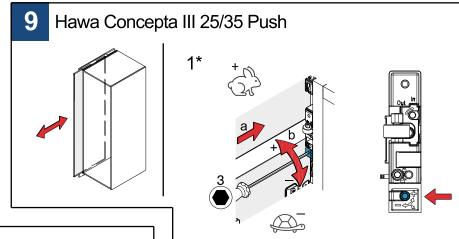

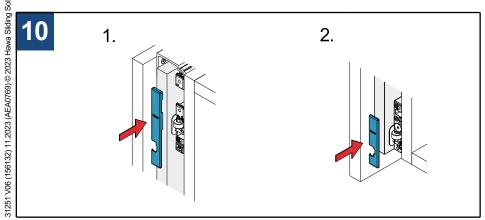








Hawa Concepta III 25/35 Push/Pull


- DE Montageanleitung Connector 55 Anlage links
- FR Instructions de montage Connector 55 Installation à gauche
- EN Installation instructions Connector 55 left-hand system
- Istruzioni di montaggio Connector 55 Installazione a sinistra
- ES Intrucciones de montaje Connector 55 Instalación a izquierda




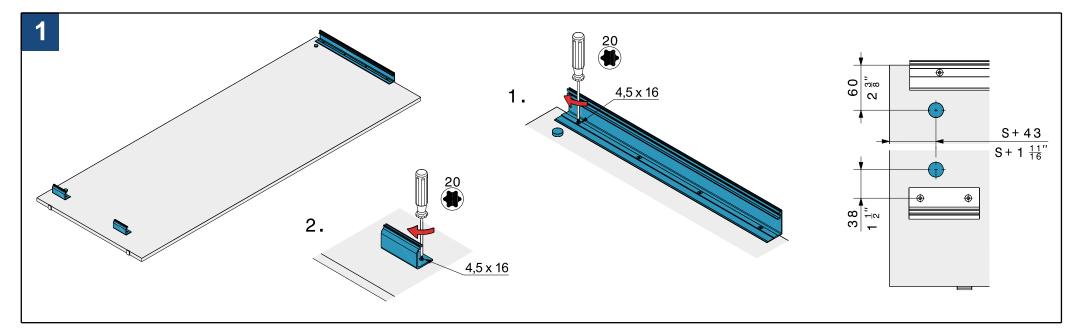

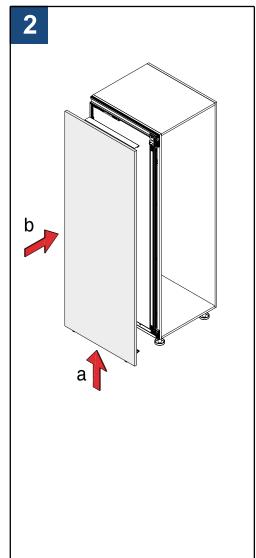

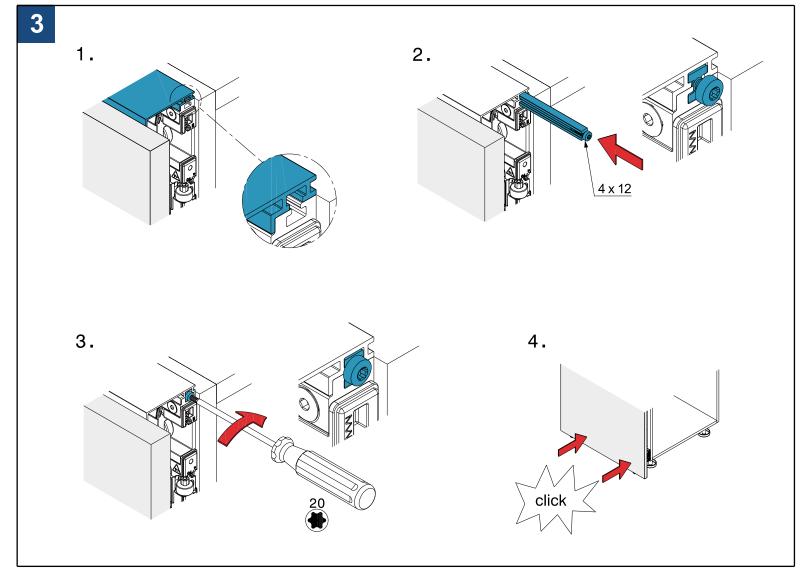

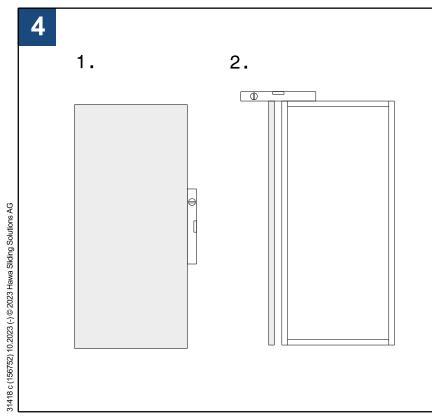

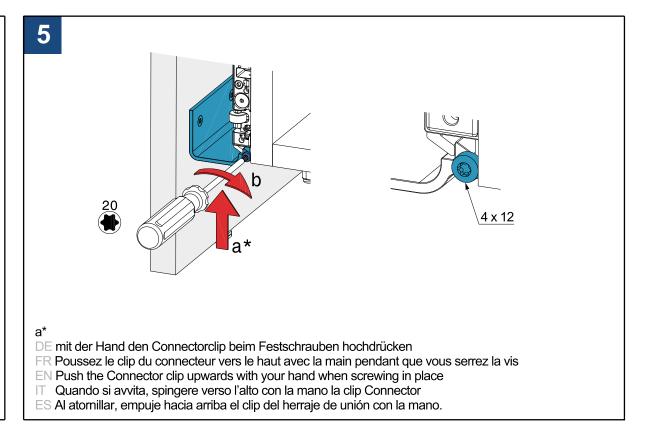






Hawa Concepta III 25/35 Push/Pull

- DE Montageanleitung Connector 110 Anlage links
 FR Instructions de montage Connector 110 Installation à gauche
 EN Installation instructions Connector 110 left-hand system
 IT Istruzioni di montaggio Connector 110 Installazione a sinistra
 ES Intrucciones de montaje Connector 110 Installación a izquierda



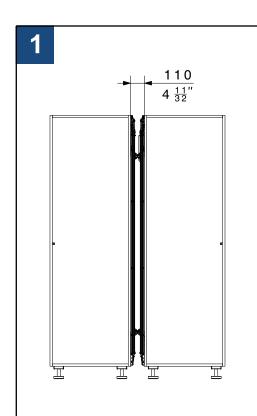

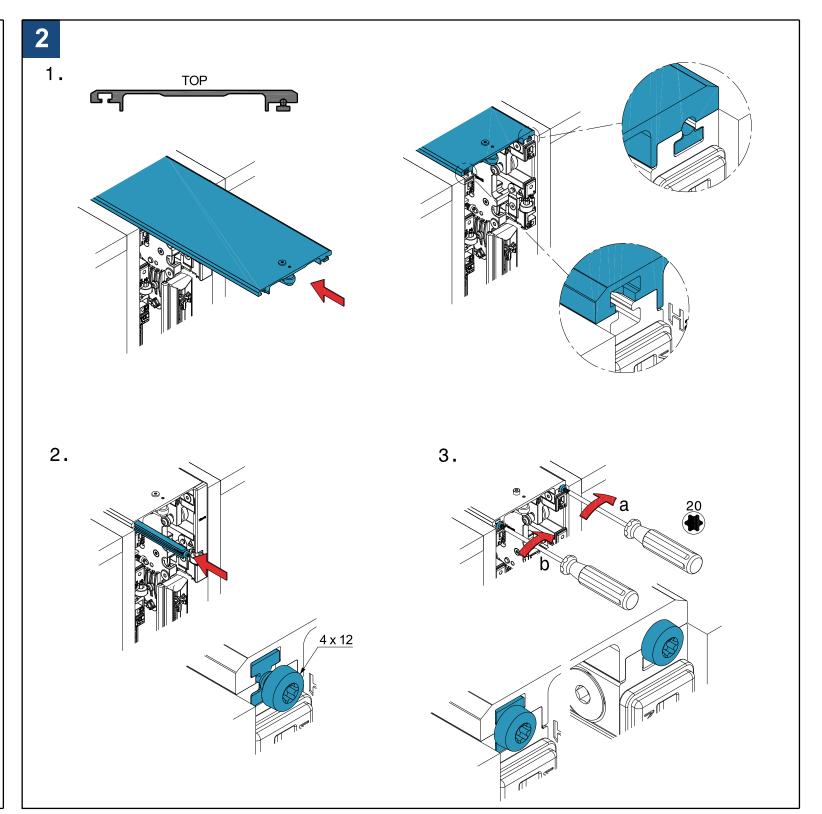

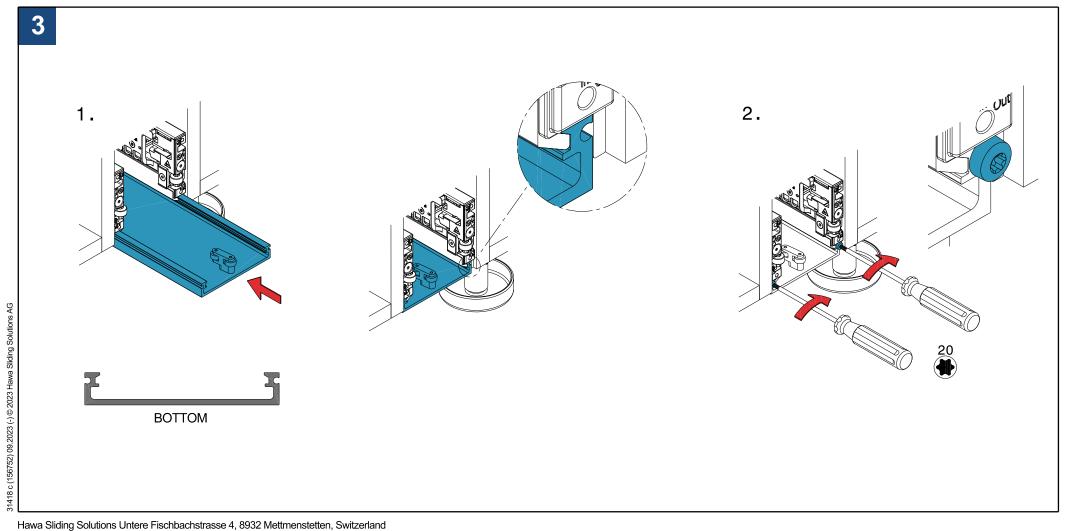



Inspiring sliding solutions on furniture

Product overview and details



www.hawa.com Rethink your space.



Inspiring sliding solutions on furniture

Hawa Concepta III

Hawa Folding Concepta III

Contents

8 **Solutions for wood applications**

154 Hawa Concepta III

- 156 Hawa Concepta III 25 Push
- 163 Hawa Concepta III 25 Pull
- 170 Hawa Concepta III 35 Push
- 177 Hawa Concepta III 35 Pull

184 Hawa Folding Concepta III

- 186 Hawa Folding Concepta III 20 Push
- 201 Hawa Folding Concepta III 20 Pull
- 216 Hawa Folding Concepta III 25 Push
- 231 Hawa Folding Concepta III 25 Pull



Wooden pivot and folding/sliding doors

Pivot and folding/sliding doors are the magicians among furniture doors. They make flush-fitting wooden cabinet fronts disappear or reappear with a single movement, can be parked away in barely visible niches, and run into the cushioned end position independently. This opens up creative application options for doors and gateways: from the pop-up home office to the utility room in the bathroom and the kitchen in the living room.



Discover our fitting solutions for wooden pivot and folding/sliding doors from Page 154



Hawa Concepta III for wooden pivot/slide-in doors Flowing transitions make rooms more flexible than ever before

Hawa Concepta III supports the trend towards open living spaces, and creates transitions from kitchen to living room or from workplace to living area in a more fluid way than ever before.

Doors of any size can be pivoted, slid in sideways and parked in an extremely small space, almost in the blink of an eye.

They can then be brought out again with a gentle tap and closed flush with the surface, so that all that remains visible of the kitchen is an aesthetic front. This works so easily and intuitively that it is even possible to dispense with handles.

We weren't just thinking about the users during the development of the Hawa Concepta III: The system impresses with its simplicity, even during installation and adjustment. This is all based on technology that is just as invisible as a kitchen that is currently not in use.





Area of application

Cabinet constructions for multi-functional use of rooms which contain kitchens, home offices, washer/dryer combinations and storage space, which are freely accessible and disappear behind the cabinet front with pivot / slide-in hardware if required.

System advantages

← Flexibility Variable door dimensions: half-height to floor-to-ceiling solutions

possible, including walk-on solutions

Productivity Easy installation thanks to high degree of pre-assembly

Intuitive adjustment with easily accessible adjustment points

Comfort Ergonomic movement support for even, smooth movement

Opening and closing with very little effort – one hand is enough

Aesthetics Uniform, flush front design with even gap pattern

Allows constructions with and without a handle - the technology

remains invisible

Technical specifications

max. 25/35 kg \uparrow

1200 - 2700 mm

 $\stackrel{\leftarrow}{\longrightarrow}$ 440 - 750 mm


 $\rightarrow \prod \leftarrow$ 18-26 mm

Good to know (accessories)


- Connector makes overlaid furniture structures possible
- Straightening fitting for doors

Installation examples


Hawa Concepta III 25/35 Push



Door striking against the top and bottom cabinet sections




Hawa Concepta III 25/35 Pull




Composed cabinet overlay doors



Hawa Concepta 25/35 Push



Overlay door without base



Fitting for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

Productivity Easy installation thanks to high degree of

pre-assembly with intuitive adjustment

Comfort Ergonomic movement support for even,

smooth movement

Aesthetics Cabinet designs without handle –

the technology remains invisible

Technical specifications

6–25 kg (13 to 55 lbs.)

1200–2200 mm (3' 11 1/4" to 7' 2 5/8")


←→ 440–750 mm (1' 5 5/16" to 2' 5 17/32")

→[|← 18–26 mm (23/32" to 1 1/32")



Installation examples

Door striking against the top and bottom cabinet sections

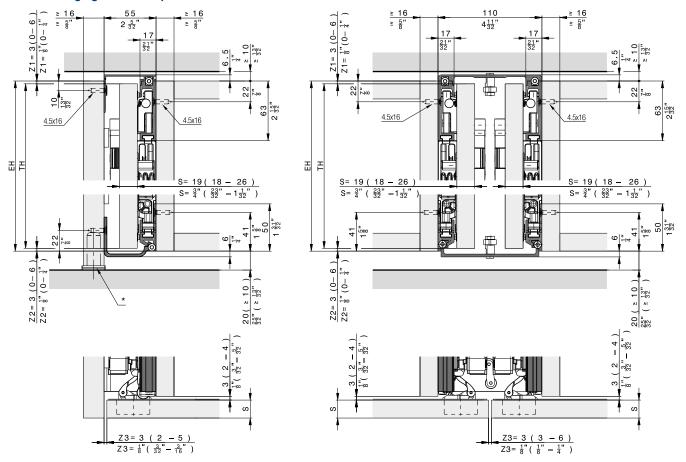

^{*} Recommendation: Use adjustable foot

Components required for one cabinet





Hawa Concepta III 25 Push, left

	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Hawa Concepta III 25 Push, right

	No.	
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995	
Hawa Concepta III 25/35 Push, slide-in set, right	30999	
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778	

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

	Door width in mm								
440 500 550 600 650 700 750									
	2200	25	25	25	25	25	25	24	
	2150	25	25	25	25	25	25	23	
	2100	25	25	25	25	25	24	23	
	2050	25	25	25	25	25	24	22	
	2000	25	25	25	25	25	23	21	
	1950	25	25	25	25	24	22	21	
	1900	25	25	25	25	23	21	20	
	1850	25	25	25	24	22	21	19	ka
E	1800	25	25	25	23	21	20	19	Maximim weights in
Door hight mm	1750	25	25	25	22	21	19	18	4pio
or hi	1700	25	25	24	22	20	19	17	2
Õ	1650	25	25	23	21	19	18	17	xim
	1600	25	24	22	20	18	17	16	Ν
	1550	25	23	21	19	18	16	15	
	1500	24	22	20	18	17	16	15	
	1450	23	21	19	17	16	15	14	
	1400	22	20	18	17	15	14	13	
	1350	21	19	17	16	15	14	13	
	1300	20	18	16	15	14	13	12	
	1250	19	17	15	14	13	12	11	
	1200	18	16	15	13	12	11	11	

	Door width in filen								
		1'55/,"	1' 7 11/, "	1' 9 21/32"	1' 11 5/8"	2' 1 19/32"	2'39/16"	2' 5 17/32"	
	7' 2 5/8"	55	55	55	55	55	55	53	
	7' 21/32"	55	55	55	55	55	55	51	
	6'10 ¹¹ / ₁₆ "	55	55	55	55	55	53	51	
	6' 8 23/32"	55	55	55	55	55	53	49	
	6'63/4"	55	55	55	55	55	51	46	
	6' 4 25/32"	55	55	55	55	53	49	46	
	6' 2 13/16"	55	55	55	55	51	46	44	
_	6' 27/32"	55	55	55	53	49	46	42	lbs.
inc	5' 10 7/8"	55	55	55	51	46	44	42	ts in
Door hight in inch	5' 8 29/32"	55	55	55	49	46	42	40	Maximum weights in Ibs
hig!	5' 6 15/16"	55	55	53	49	44	42	37	Ň
700G	5' 4 31/32"	55	55	51	46	42	40	37	imu
_	5' 3"	55	53	49	44	40	37	35	Max
	5' 1 ¹ / ₃₂ ''	55	51	46	42	40	35	33	
	4' 11 ¹ / ₁₆ ''	53	49	44	40	37	35	33	
	4' 9 3/32"	51	46	42	37	35	33	31	
	4' 7 1/8"	49	44	40	37	33	31	29	
	4' 5 5/32"	46	42	37	35	33	31	29	
	4' 3 3/16"	44	40	35	33	31	29	26	
	4' 1 ⁷ / ₃₂ ''	42	37	33	31	29	26	24	
	3' 11 ¹ /,''	40	35	33	29	26	24	24	

Door width in inch

Door wight in kg

Door wight in lbs.

Hawa Configurator

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995

-				
Set consisting	of:	30994	30995	No.
	Slot nuts for hinge attachment, plastic, black	3	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	3	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
0	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 16 pieces, incl. Torx T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Hawa Concepta III 25/35 Push, slide-in set, right	30999

Set consisting	of:	30998	30999	No.
	Hawa Concepta III 25/35 Push slide-in unit, left	1		31038
00000	End stop bracket for push ejector, steel, zinc-plated	1	1	52559
	Push ejector, plastic, black	1	1	52454
	Push-to-open with adapter plate, plastic, black	1	1	30838
HH.	Hawa Concepta III Push set of cover caps, for left-hand stop, plastic, black	1		30818
	Hawa Concepta III 25/35 Push slide-in unit, right		1	31039
H.	Hawa Concepta III Push set of cover caps, for right-hand stop, plastic, black		1	30827

Uprights

	Nr.
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
To Season	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32"), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Guides

	No.
Guide for two inset pivot sliding doors, aluminum	25680

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family. www.halemeier.de

Straightening fitting

ightarrow Details under accessories frome page 327 Aluminum, untreated

	No.
Straightening fitting for doors 1715–2275 mm (3' 11 27/32" to 5' 9 7/8"), aluminum	056.3192.079
Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.073


Aluminum, anodized


	Nr.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32" to 7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32")	056.3192.080

Aluminum, black anodized

	140.
Straightening fitting for doors 1715–2275 mm (5' 7 15/32" to 7' 5 9/16"), aluminum, black anodized	056.3192.081
Straightening fitting for doors 1215–1775 mm (3' 11 27/32" to 5' 9 7/8"), aluminum, black anodized, can be shortened for doors smaller 1215 mm (3'11 27/32")	056.3192.076


Straightening fitting




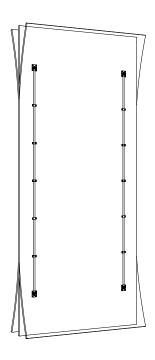


Further installation examples


Composed cabinet

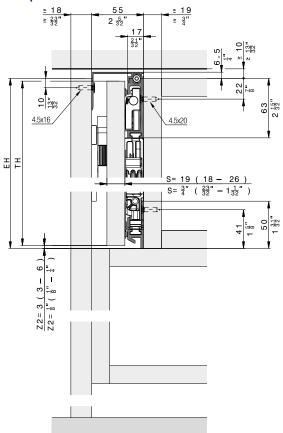







Cabinet without base panel




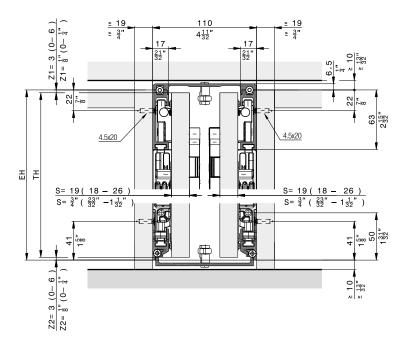


^{*} Recommendation: Use adjustable foot

Inlaid doors



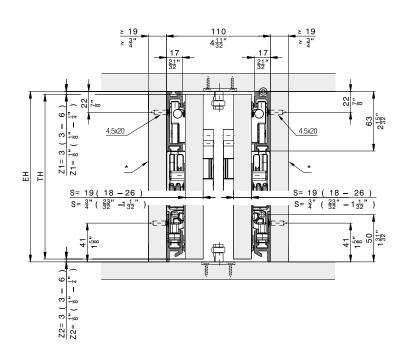

Floor-to-ceiling doors

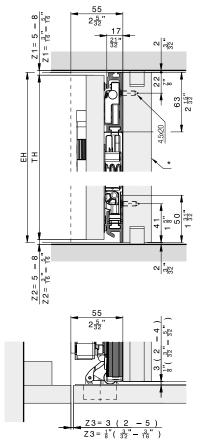


* removable

^{*} removable


Hawa Concepta III 25 Push

Hardware depth calculation




	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₈ " + Z3 - M
E1	TB - M	TB - M
М	≥S+3 ≤TB-320	≥S + ¹ / ₈ " ≤TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door



Instructions Videos

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

Hardware for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights

Productivity Easy installation thanks to high degree of

pre-assembly with intuitive adjustment

Comfort Ergonomic movement support for even,

smooth movement

Aesthetics Allows constructions with and without

handle - the technology remains invisible

Technical specifications

6–25 kg (13 to 55 lbs.)

1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')


←→ 440–750 mm (1' 5 5/16'' to 2' 5 17/32'')

→[[← 18–26 mm (23/32'' to 1 1/32'')



Installation examples

Door striking against the top and bottom cabinet sections

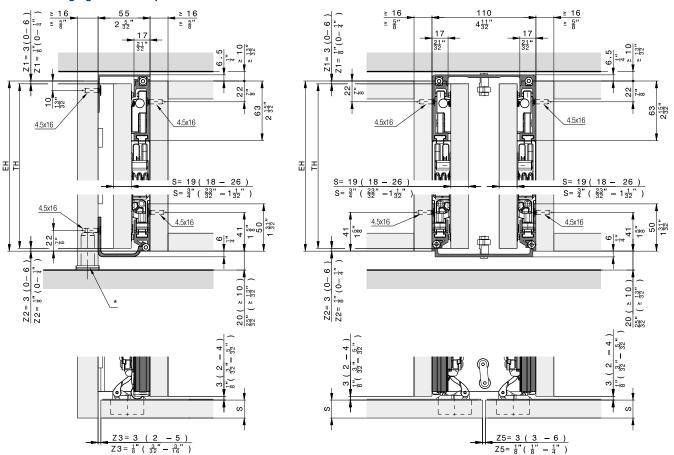

^{*} Recommendation: Use adjustable foot

Components required for one cabinet





Hawa Concepta III 25 Pull, left

	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Hawa Concepta III 25 Pull, right

	No.
Hawa Concepta III 25, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

440 500 550 600 650 700 75 2200 25 25 25 25 25 25 25 2150 25 25 25 25 25 25 25 2100 25 25 25 25 25 24 23 2050 25 25 25 25 25 24 22	
2150 25 25 25 25 25 25 25 25 25 25 25 25 25 25 25 25 25 25 24 23 2050 25 25 25 25 25 25 24 22	ס
2100 25 25 25 25 25 24 23 2050 25 25 25 25 25 24 22	
2050 25 25 25 25 25 24 22	
2000 25 25 25 25 25 23 21	
1950 25 25 25 24 22 21	
1900 25 25 25 25 23 21 20	
1850 25 25 25 24 22 21 19	2
E 1800 25 25 25 23 21 20 19	Maximum weights in kg
E 1800 25 25 25 23 21 20 18 1750 25 25 25 22 21 19 18 1770 25 25 25 24 22 20 19 17 1650 25 25 25 23 21 19 18 17	eig 🗌
1700 25 25 24 22 20 19 17	_ ≥
1650 25 25 23 21 19 18 17	IJ.Ĕ
1600 25 24 22 20 18 17 16	∑ Za
1550 25 23 21 19 18 16 15	
1500 24 22 20 18 17 16 15	
1450 23 21 19 17 16 15 14	
1400 22 20 18 17 15 14 13	
1350 21 19 17 16 15 14 13	
1300 20 18 16 15 14 13 12	
1250 19 17 15 14 13 12 11	
1200 18 16 15 13 12 11 11	

Door wight in kg

		Door width in inch							
		1' 5 5/16"	1' 7 ¹¹ / ₁₆ "	1' 9 21/32"	1' 11 5/8"	2' 1 19/32"	2' 3 9/16"	2' 5 17/32"	
	7' 2 5/8"	55	55	55	55	55	55	53	
	7' 21/32"	55	55	55	55	55	55	51	
	6'10 ¹¹ / ₁₆ "	55	55	55	55	55	53	51	
	6' 8 23/32"	55	55	55	55	55	53	49	
	6' 6 ³ / ₄ ''	55	55	55	55	55	51	46	
	6' 4 25/32"	55	55	55	55	53	49	46	
	6' 2 ¹³ / ₁₆ "	55	55	55	55	51	46	44	
_	6' 27/32"	55	55	55	53	49	46	42	BS.
Door hight in inch	5' 10 ⁷ / ₈ ''	55	55	55	51	46	44	42	ts in
	5' 8 29/32"	55	55	55	49	46	42	40	Maximum weights in Ibs
	5' 6 ¹⁵ / ₁₆ "	55	55	53	49	44	42	37	≥ E
Dool	5' 4 31/32"	55	55	51	46	42	40	37	Ē
_	5' 3"	55	53	49	44	40	37	35	Ma
	5' 1 ¹ / ₃₂ "	55	51	46	42	40	35	33	
	4' 11 ¹ / ₁₆ "	53	49	44	40	37	35	33	
	4' 9 ³ / ₃₂ "	51	46	42	37	35	33	31	
	4' 7 1/8"	49	44	40	37	33	31	29	
	4' 5 5/32"	46	42	37	35	33	31	29	
	4' 3 3/16"	44	40	35	33	31	29	26	
	4' 1 ⁷ / ₃₂ "	42	37	33	31	29	26	24	
	3' 11 1/4"	40	35	33	29	26	24	24	

Door wight in lbs.

Hawa Configurator

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995

Set consisting	of:	30994	30995	No.
	Slot nuts for hinge attachment, plastic, black	3	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	3	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
0	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 16 pieces, incl. Torx T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Hawa Concepta III 25/35 Pull, slide-in set, rightt	31001

Set consisting	of:	31000	31001	No.
	Hawa Concepta III 25/35 Pull slide-in unit, left	1		31040
	End stop bracket Pull, steel zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III Pull set of cover caps, for left-hand stop, plastic, black	1		30964
	Hawa Concepta III 25/35 Pull slide-in unit, right		1	31041
7	Hawa Concepta III Pull set of cover caps, for right-hand stop, plastic, black		1	30965

Uprights

	Nr.
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
Sea a	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32"), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32")	31007

Guides

	No.
Guide for two inset pivot sliding doors, aluminum	25680

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family. www.halemeier.de

Straightening fitting

→ Details under accessories frome page 327

Aluminum, untreated

	No.
Straightening fitting for doors 1715–2275 mm (3' 11 27/32" to 5' 9 7/8"), aluminum	056.3192.079
Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.073


Aluminum, anodized


	Nr.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32'' to 7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32'')	056.3192.080

Aluminum, black anodized


	No.
Straightening fitting for doors 1715–2275 mm (5' 7 15/32" to 7' 5 9/16"), aluminum, black anodized	056.3192.081
Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, black anodized, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.076


Straightening fitting




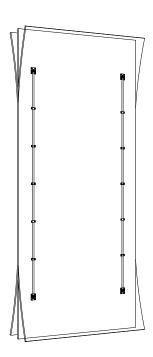


Further installation examples

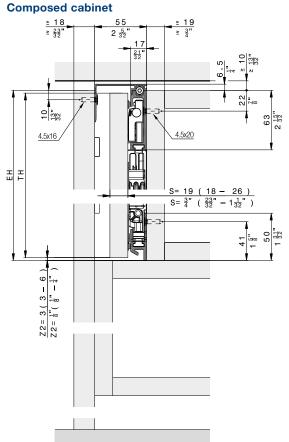







Cabinet without base panel




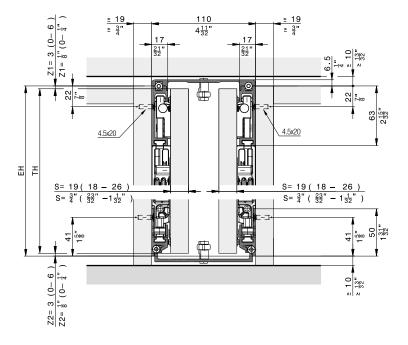


^{*} Recommendation: Use adjustable foot

Inlaid doors



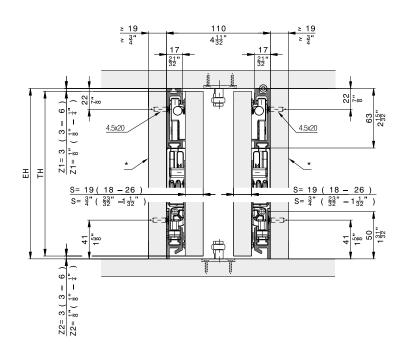


Floor-to-ceiling doors

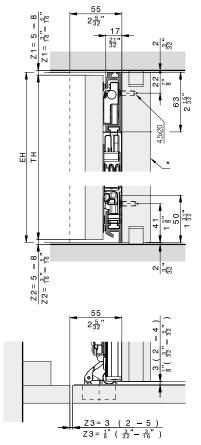

* removable


^{*} removable

Hardware depth calculation




	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₈ " + Z3 - M
E1	TB - M	TB - M
М	≥S+3 ≤TB-320	≥S + $\frac{1}{8}$ " ≤TB - 1 $\frac{19}{32}$ "

Door flush with outer face



Protruding door



Instructions Videos

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

Fitting for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

Productivity Easy installation thanks to high degree of

pre-assembly with intuitive adjustment

Comfort Ergonomic movement support for even,

smooth movement

Aesthetics Cabinet designs without handle –

the technology remains invisible

Technical specifications

10–35 kg (22 to 77 lbs.)

1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')


←→ 440–750 mm (1' 5 5/16" to 2' 5 17/32")

→[]← 18–26 mm (23/32" to 1 1/32")



Installation examples

Door striking against the top and bottom cabinet sections

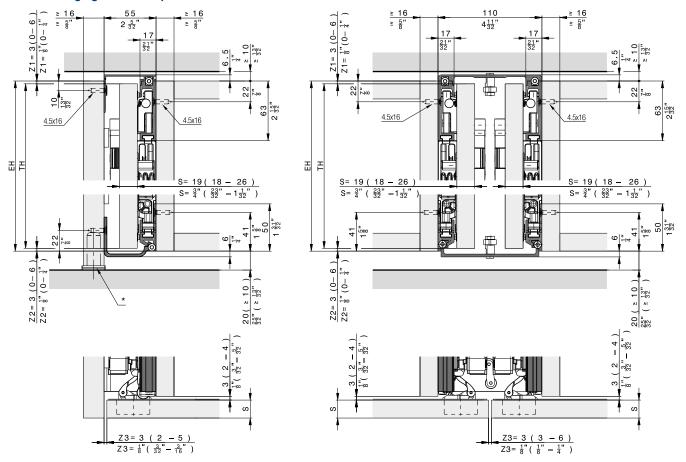

^{*} Recommendation: Use adjustable foot

Components required for one cabinet





Hawa Concepta III 35 Push, left

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Hawa Concepta III 35 Push, right

	No.
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

	Door width in mm								
		440	500	550	600	650	700	750	
	2700	35	35	35	35	35	35	35	
	2650	35	35	35	35	35	35	35	
	2600	35	35	35	35	35	35	35	
	2550	35	35	35	35	35	35	35	
	2500	35	35	35	35	35	35	35	
	2450	35	35	35	35	35	35	34	0
_	2400	35	35	35	35	35	35	33	in kg
Door hight mm	2350	35	35	35	35	35	34	32	Maximum weights
high	2300	35	35	35	35	35	34	31	wei
oor	2250	35	35	35	35	35	33	31	mun.
П	2200	35	35	35	35	34	32	30	1axir
	2150	35	35	35	35	33	31	29	2
	2100	35	35	35	35	32	30	28	
	2050	35	35	35	34	31	29	27	
	2000	35	35	35	33	30	28	26	
	1950	35	35	35	32	29	27	26	
	1900	35	35	34	31	29	27	25	

Door wight in kg

	Door width in inch								
		1'5 ⁵ / ₁₆ "	1' 7 11/16"	1' 9 21/32"	1' 11 5/8"	2' 1 19/32"	2' 3 9/16"	2' 5 17/32"	
	8' 10 ⁵ / ₁₆ "	77	77	77	77	77	77	77	
	8' 8 11/32"	77	77	77	77	77	77	77	
	8'63/8"	77	77	77	77	77	77	77	
	8' 4 ¹³ / ₃₂ ''	77	77	77	77	77	77	77	
	8' 2 ⁷ / ₁₆ "	77	77	77	77	77	77	77	
	8' 15/32"	77	77	77	77	77	77	75	s.
ch	7' 10 1/2"	77	77	77	77	77	77	73	dl ni
ᆵ	7' 8 17/32"	77	77	77	77	77	75	71	hts
ight	7' 6 9/16"	77	77	77	77	77	75	68	weig
Door hight in inch	7' 4 ¹⁹ / ₃₂ "	77	77	77	77	77	73	68	Maximum weights in lbs.
ŏ	7' 2 5/8"	77	77	77	77	75	71	66	axin
	7' 21/32"	77	77	77	77	73	68	64	Σ
	6' 10 ¹¹ / ₁₆ "	77	77	77	77	71	66	62	
	6' 8 33/32"	77	77	77	75	68	64	60	
	6' 6 3/4"	77	77	77	73	66	62	57	
	6' 4 ²⁵ / ₃₂ ''	77	77	77	71	64	60	57	
	6' 2 ¹³ / ₁₆ "	77	77	75	68	64	60	55	

Door wight in lbs.

	o
Hawa	Configurator

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997

,	<u> </u>			
Set consisting	of:	30996	30997	No.
	Slot nuts for hinge attachment, plastic, black	4	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	4	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
0	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 16 pieces, incl. Torx T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Hawa Concepta III 25/35 Push, slide-in set, right	30999

Set consisting	of:	30998	30999	No.
	Hawa Concepta III 25/35 Push slide-in unit, left	1		31038
	End stop bracket for push ejector, steel, zinc-plated	1	1	52559
	Push ejector, plastic, black	1	1	52454
	Push-to-open with adapter plate, plastic, black	1	1	30838
HH.	Hawa Concepta III Push set of cover caps, for left-hand stop, plastic, black	1		30818
	Hawa Concepta III 25/35 Push slide-in unit, right		1	31039
980	Hawa Concepta III Push set of cover caps, for right-hand stop, plastic, black		1	30827

Uprights

	INT.
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
Harry States	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32"), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Straightening fitting → Details under accessories frome page 327 Aluminum, untreated

	Nr.
Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum	056.3192.072
Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079

Aluminum, anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, anodized	056.3192.071
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8 ''), aluminum, anodized	056.3192.082
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32" to 7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32")	056.3192.080

Guides

	No.
Guide for two inset pivot sliding doors, aluminum	25680


Automatic shut-off device


In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family. www.halemeier.de

Aluminum, black anodized


		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32" to 7' 5 9/16"), aluminum, black anodized	056.3192.081


Straightening fitting







Further installation examples

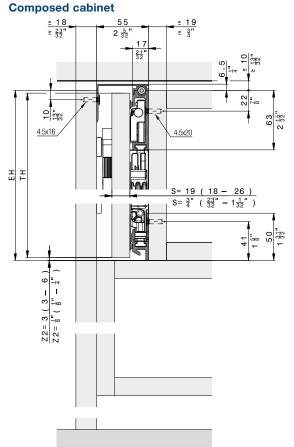






Cabinet without base panel



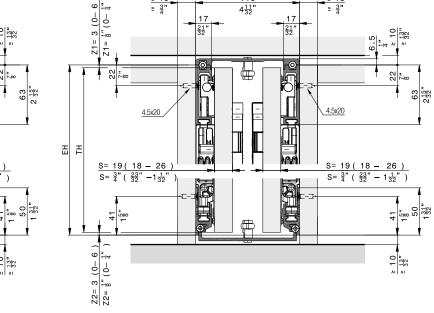



110

411/32


^{*} Recommendation: Use adjustable foot

Inlaid doors



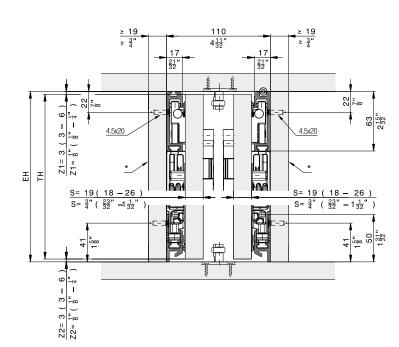

Floor-to-ceiling doors

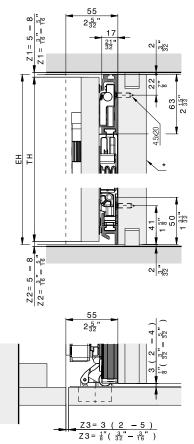


* removable

^{*} removable


Hawa Concepta III 35 Push

Hardware depth calculation




	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₈ " + Z3 - M
E1	TB - M	TB - M
М	≥S+3 ≤TB-320	≥S + ¹ / ₈ " ≤TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door



Instructions Videos

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

Hardware for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights

Productivity Easy installation thanks to high degree of

pre-assembly with intuitive adjustment

Comfort Ergonomic movement support for even,

smooth movement

Aesthetics Allows constructions with and without

handle - the technology remains invisible


Technical specifications

10–35 kg (22 to 77 lbs.)

1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')


←→ 440–750 mm (1' 5 5/16" to 2' 5 17/32")

→[]← 18–26 mm (23/32" to 1 1/32")



Installation examples

Door striking against the top and bottom cabinet sections

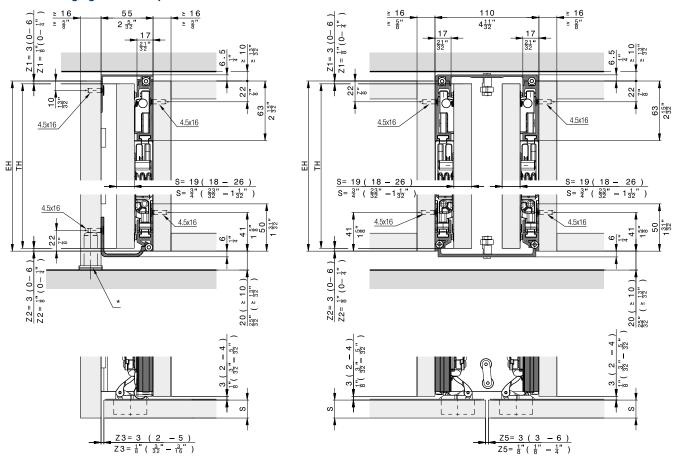

^{*} Recommendation: Use adjustable foot

Components required for one cabinet





Hawa Concepta III 35 Pull, left

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Hawa Concepta III 35 Pull, right

	No.
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30997
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

Door width in mm									
		440	500	550	600	650	700	750	
	2700	35	35	35	35	35	35	35	Maximum weights in kg
	2650	35	35	35	35	35	35	35	
	2600	35	35	35	35	35	35	35	
	2550	35	35	35	35	35	35	35	
	2500	35	35	35	35	35	35	35	
Door hight mm	2450	35	35	35	35	35	35	34	
	2400	35	35	35	35	35	35	33	
	2350	35	35	35	35	35	34	32	
	2300	35	35	35	35	35	34	31	
	2250	35	35	35	35	35	33	31	
ם ו	2200	35	35	35	35	34	32	30	
	2150	35	35	35	35	33	31	29	
	2100	35	35	35	35	32	30	28	
	2050	35	35	35	34	31	29	27	
	2000	35	35	35	33	30	28	26	
	1950	35	35	35	32	29	27	26	
	1900	35	35	34	31	29	27	25	

Door wight in kg

Door width in inch									
		1' 5 5/16"	1' 7 11/16"	1' 9 21/32"	1' 11 5/8"	2' 1 19/32"	2' 3 9/16"	2' 5 17/32"	
	8' 10 ⁵ / ₁₆ "	77	77	77	77	77	77	77	
	8' 8 11/32"	77	77	77	77	77	77	77	
	8'63/8"	77	77	77	77	77	77	77	Maximum weights in Ibs.
	8' 4 13/32"	77	77	77	77	77	77	77	
	8' 2 7/16"	77	77	77	77	77	77	77	
	8' 15/32"	77	77	77	77	77	77	75	
Door hight in inch	7' 10 1/2"	77	77	77	77	77	77	73	
	7' 8 17/32"	77	77	77	77	77	75	71	
ignt	7' 6 ⁹ / ₁₆ "	77	77	77	77	77	75	68	
פֿי	7' 4 ¹⁹ / ₃₂ "	77	77	77	77	77	73	68	
ĭ	7' 2 5/8"	77	77	77	77	75	71	66	
	7' 21/32"	77	77	77	77	73	68	64	
	6' 10 ¹¹ / ₁₆ "	77	77	77	77	71	66	62	
	6' 8 33/32"	77	77	77	75	68	64	60	
	6' 6 3/4"	77	77	77	73	66	62	57	
	6' 4 25/32"	77	77	77	71	64	60	57	
	6' 2 13/16"	77	77	75	68	64	60	55	

Door wight in lbs.

مسم	Car	fia	urat	
Hawa	Cor	ıtıaı	ura	lor

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30997

Set consisting	of:	30996	30997	No.
	Slot nuts for hinge attachment, plastic, black	4	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	4	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
0	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 16 pieces, incl. Torx T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Hawa Concepta III 25/35 Pull, slide-in set, right	31001

Set consisting	of:	31000	31001	No.
	Hawa Concepta III 25/35 Pull slide-in unit, left	1		31040
	End stop bracket Pull, steel zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III Pull set of cover caps, for left-hand stop, plastic, black	1		30964
	Hawa Concepta III 25/35 Pull slide-in unit, right		1	31041
7	Hawa Concepta III Pull set of cover caps, for right-hand stop, plastic, black		1	30965

Uprights

	Nr.
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
To the state of th	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32"), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Straightening fitting \rightarrow Details under accessories frome page 327 Aluminum, untreated

	Nr.
Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum	056.3192.072
Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079

Aluminum, anodized

	No.
Straightening fitting for doors 2240–2850 mm (7' 4 3/16'' to 9' 4 7/32''), aluminum, anodized	056.3192.071
Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8 ''), aluminum, anodized	056.3192.082
Straightening fitting for doors 1715–2275 mm (5' 7 17/32" to 7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32")	056.3192.080

Guides

	No.
Guide for two inset pivot sliding doors, aluminum	25680


Automatic shut-off device


In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family. www.halemeier.de

Aluminum, black anodized


		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32" to 7' 5 9/16"), aluminum, black anodized	056.3192.081


Straightening fitting







Further installation examples

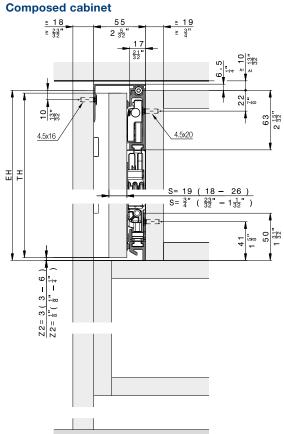







Cabinet without base panel




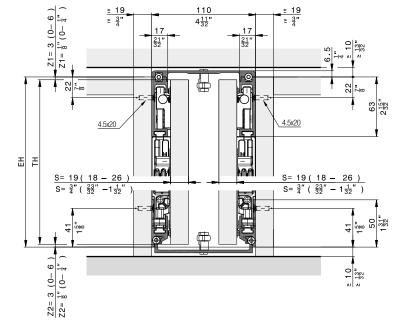


^{*} Recommendation: Use adjustable foot

Inlaid doors



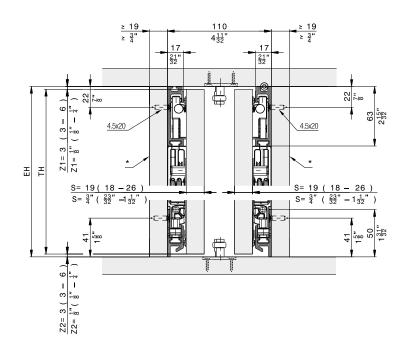


Floor-to-ceiling doors

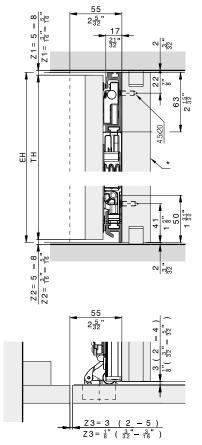

* removable

^{*} removable

Hardware depth calculation




	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₈ " + Z3 - M
E1	ТВ - М	TB - M
М	≥S+3 ≤TB-320	≥S + $\frac{1}{8}$ " ≤TB - 1 $\frac{19}{32}$ "

Door flush with outer face



Protruding door



Instructions Videos

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

Hawa Folding Concepta III for wooden folding/slide-in doors Folded doors give you even more design freedom

Pivoting doors, sliding them in at the side and parking them in the smallest of spaces: This is how the Hawa Concepta III family makes entire cabinet and kitchen units disappear and emerge again. And the Hawa Folding Concepta III even extends this movement sequence by another dimension by folding the doors beforehand. This leaves room for structures with a particularly large area, since 2 pairs of doors make it possible to have cabinet fronts measuring up to 3000 mm wide and 2700 mm high. Operation is just as intuitive as it is with every Hawa Concepta III system: A tap is sufficient to open the door and initiate the movement sequence everything else takes place almost automatically. The Hawa Folding Concepta III is also based on the typical qualities of the hardware family: Versions with and without handles, height and width variations, a high degree of pre-assembly - allowing you to work, live and enjoy life.



Area of application

Variable, multi-functional use of rooms, such as for home offices which disappear behind doors, cabinet fronts which conceal a kitchen, or utility rooms or store rooms which are designed as walk-in cabinets.

System advantages

Flexibility Variable door dimensions: Floor-to-ceiling solutions are possible,

also as walk-in solutions

Can be combined with Hawa Concepta III, for three-door solutions

without a separating wall

Productivity Easy installation thanks to high degree of pre-assembly

Intuitive adjustment with easily accessible adjustment points


└ Comfort No obstruction by protruding doors

Opening and closing with minimal force - one hand is enough


Aesthetics Allows constructions with and without handle - the technology

remains invisible


Uniform, flush front design with even gap pattern




Overlay door without base profile




Hawa Folding Concepta III 20/25 Push



Floor-to-ceiling doors without




Technical specifications




Good to know (accessories)

- Straightening fitting for doors
- Reinforcement profile for stability
- Base profile set

Hawa Folding Concepta III 20/25 Pull



Overlay door with base profile in conjunction



Hardware for pivoting, folding and lateral sliding in of wooden doors up to 20 kg (44 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

Flexibility Variable door dimensions, also for

floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III

Productivity Easy installation thanks to high degree of

pre-assembly and intuitive adjustment

Aesthetics Cabinet designs without handle – the technology

remains invisible


Technical specifications

6–20 kg (13 to 44 lbs.)


1200–2200 mm (3' 11 1/4'' to 7' 2 5/8'')

 $\buildrel \rightarrow$ 440–750 mm (1' 5 5/16'' to 2' 5 17/32'')

→[[← 18–26 mm (23/32'' to 1 1/32'')




Installation examples Overlay door without base profile

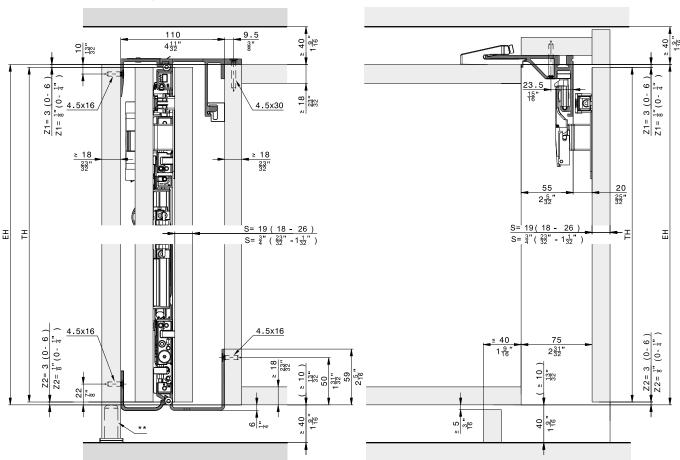


^{**} Recommendation: Use adjustable foot

Overlay door without base profile, 2 and 4 doors

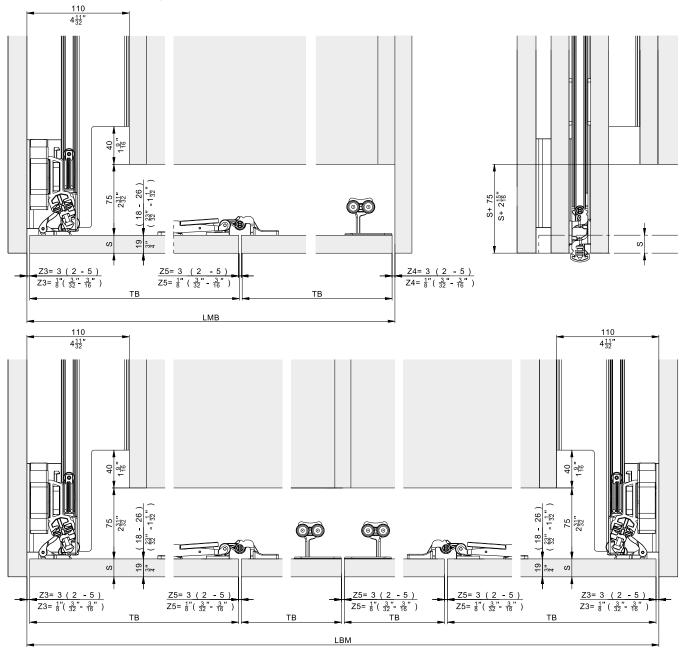


Required components

for 2-door cabinets




Hawa Folding Concepta III 20 Push, left Aluminum, anodized



Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526


for 4-door cabinets



Hawa Folding Concepta III 20 Push, left/right

Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	1	31508
Hawa Folding Concepta III 20 Push, slide-in set, right	1	31509
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	2	31519



Hawa Folding Concepta III 20 Push, right

Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519


Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

Aluminum, black anodized

	Pcs.	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	1	31508
Hawa Folding Concepta III 20 Push, slide-in set, right	1	31509
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	2	31526

for 3-door cabinets



Hawa Folding Concepta III 20 Push, left with Hawa Concepta III 25 Push, right


Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, anodized, L= 1974 mm (6' 5 23/32'')	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

Hawa Configurator



Hawa Folding Concepta III 20 Push, right with Hawa Concepta III 25 Push, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set left,	30994

Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Connector set 55 mm (2 5/32"),	31005
exterior connection to cabinet, top and bottom	31003

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Connector set 55 mm (2 5/32"),	31005
exterior connection to cabinet, top and bottom	31003

List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 20 kg (44 lbs.)

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504

Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")			31504
Set consisting of:		31504	No.
	Slot nuts for hinge attachment, plastic, black	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, without soft closing mechanism and closing spring, steel, nickel plated	3	31435
	Center concealed hinge, spring loaded, steel, matt nickel-plated	3	30794
9999999	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 20 pieces	1	31532
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
9	Screw set for Push-to-open and folding door soft closing mechanism	1	31531
	Folding door soft closing mechanism	1	31064
all or start	Push-to-open for folding door	1	31332
	Counterplate for Push-to-open folding door, plastic, black	1	31036
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
9999	Screw set for double running track and Connector attachment at the bottom	1	31530

Suitable slide-in set

	No.
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20 Push, slide-in set, right	31509

Set consisting	of:	31508	31509	No.
	Slide-in unit Hawa Folding Concepta III 20 Push, left	1		31448
	End stop bracket for Push ejector, steel, zinc-plated	1	1	52560
	Push ejector, plastic, black	1	1	52454
	Slide-in securing mechanism, plastic, black	1	1	30966
8	Adhesive plate for Push-to-open folding door, with double-sided adhesive tape, silver- gray and black	1	1	52118
	Slide-in unit Hawa Folding Concepta III 20 Push, right		1	31450

Suitable 2-door and 4-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting	of:	31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, anodized		1	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343

Upright set, aluminum, anodized

	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Set consisting	of:	31519	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 2200 mm (7' 2 5/8")	1	31230
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Suitable 3-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting	of:	31516	31517	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
	Running track front, aluminum, anodized, L= 1954 mm (6' 4 15/16")	1	1	31341
	Running track curve, left, aluminum, anodized	1		31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
0	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340

Continued table on next column

Table continued from previous column

Running track curve, right, aluminum, anodized	1	31366
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
Connector, top right L= 788 mm (2' 7 1/32")	1	31371

Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

Set consisting	Set consisting of:		31522	31525	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

Cover-up pen for cut edge, black	1	1	1	52117
Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
Running track curve, right, aluminum, black anodized		1	1	31368
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized

	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

Set consisting	of:	31526	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized, L= 2200 mm (7' 2 5/8")	1	31231
A	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Suitable 3-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting	of:	31523	31524	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
	Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
	Running track curve, left, aluminum, black anodized	1		31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
0	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Cover-up pen for cut edge, black	1	1	52117

Continued table on next column

Table continued from previous column

Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
Running track curve, right, aluminum, black anodized	1	31368
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
Connector, top right, L= 788 mm (2' 7 1/32")	1	31371

Reinforcement profiles

	No.
Reinforcement profile for running track front, 2765 mm (9' 27/32"), 4 doors, aluminum, anodized	52109
Reinforcement profile for running track front, 2085 mm (6' 10 3/32"), 3 doors, aluminum, anodized	52110

Base profiles

		No.
	Base profile set, 2 doors, aluminum, anodized	52089
	Base profile set, 3 doors, aluminum, anodized	52090
	Base profile set, 4 doors, aluminum, anodized	52091
	Base profile set, 2 doors, aluminum, black anodized	52092
	Base profile set, 3 doors, aluminum, black anodized	52093
	Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
Routing jig for folding hinge	52121
Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting

ightarrow Details under accessories frome page 327

Aluminum, untreated

	No.
Straightening fitting for doors 1715–2275 mm (3' 11 27/32" to 5' 9 7/8"), aluminum	056.3192.079
Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.073

Aluminum, anodized

	Nr.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32'' to 7' 5 9/16''), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32'')	056.3192.080


Aluminum, black anodized

	No.
Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081
Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, black anodized, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.076

Automatic shut-off device


In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family. www.halemeier.de

Further installation examples Overlay door with base profile, 2 and 4 doors

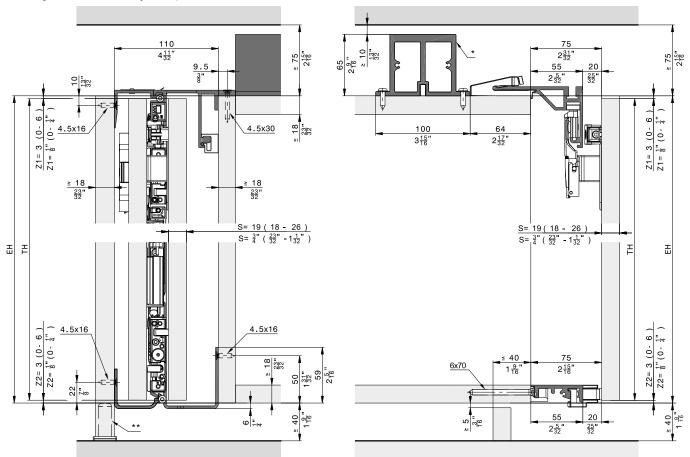

- * Reinforcement profile for 3-door and 4-door systems without separating walls
- ** Recommendation: Use adjustable foot


Floor-to-ceiling doors without base panels, 2 doors and 4 doors

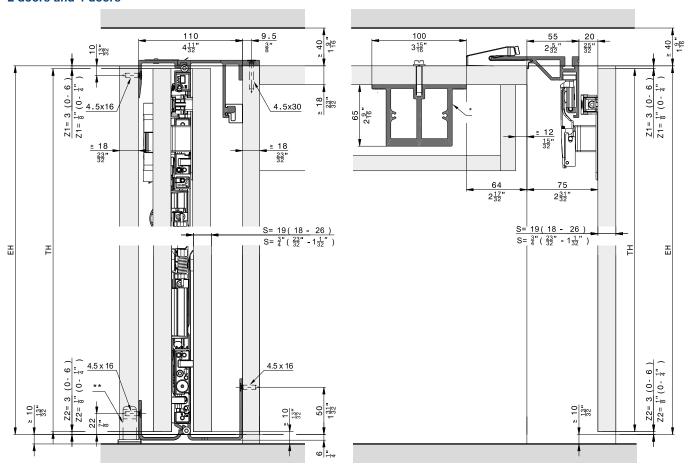


^{*} Reinforcement profile for 3-door and 4-door systems without separating walls

^{**} Recommendation: Use adjustable foot


Overlay door without base profile, 3 doors

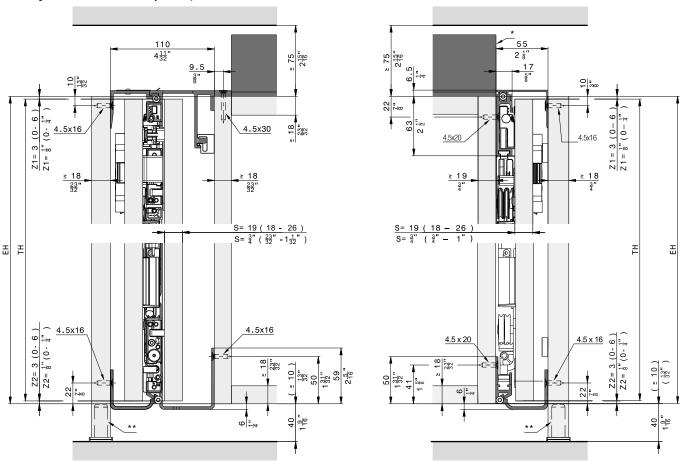



- * Reinforcement profile for 3-door and 4-door systems without separating walls
- ** Recommendation: Use adjustable foot

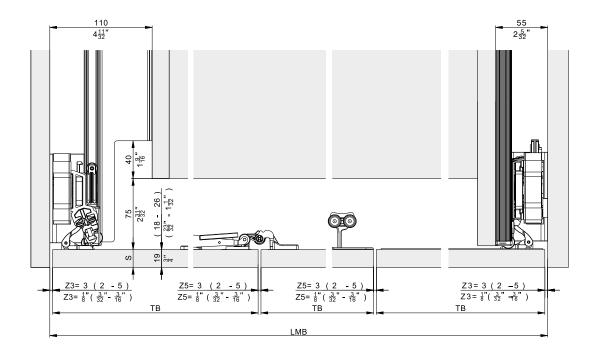


Composed cabinet

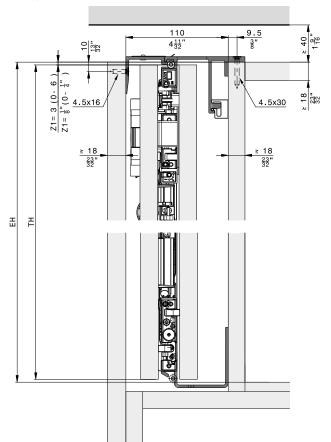


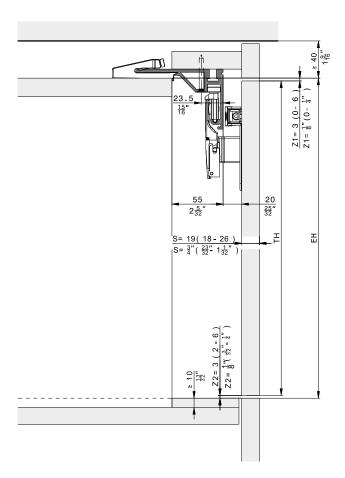





Hardware depth calculation





	mm	Inch
T2	TB + 92 + Z3 - M2	TB + $3\frac{5}{8}$ " + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 15 "
M2 max.	≤ TB - 250	≤ TB - 9 ²⁷ / ₃₂ "





S = Door thickness

Z = Gap size

E2 = Slide-in depth

T2 = Hardware depth

TB = Door width

TH = Door height

KT2 = Cabinet depth

LMB = Inside clearance

M2 = Door projection

over cabinet

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

Hardware for pivoting, folding and lateral sliding in of wooden doors up to 20 kg (44 lbs.). Uniform, flush front design with even gap pattern. Invisible technology. Pull version with handle.

Product highlights

Comfort

♦ Flexibility Variable door dimensions, also for

> floor-to-ceiling, walk-in closets - can be combined with Hawa Concepta III

Productivity Easy installation thanks to high degree of

pre-assembly and intuitive adjustment

Opening and closing with very little

effort - one hand is enough


Technical specifications

M 6-20 kg (13 to 44 lbs.)

 \uparrow 1200-2200 mm (3' 11 1/4" to 7' 2 5/8")


 $\leftarrow \rightarrow$ 440-750 mm (1' 5 5/16" to 2' 5 17/32")


 $\rightarrow \, \Big] \leftarrow$ 18-26 mm (23/32" to 1 1/32")



 $\frac{S = 19 (18 - 26)}{S = \frac{3}{4}" (\frac{23}{32}" - 1\frac{1}{32}")}$

Installation examples Overlay door without base profile

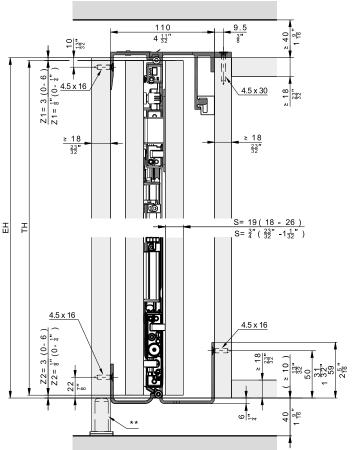

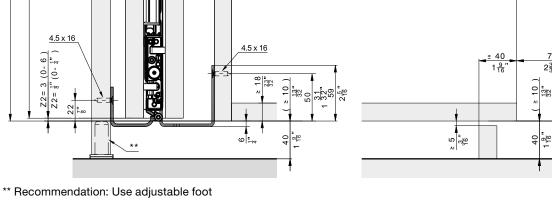


 $\frac{Z1 = 3(0-6)}{Z1 = \frac{1}{8}(0-\frac{1}{4})}$

ᇤ


Z2 = 3 (0-6) $Z2 = \frac{1}{8} (0-\frac{1}{4})$

Overlay door without base profile, 2 and 4 doors

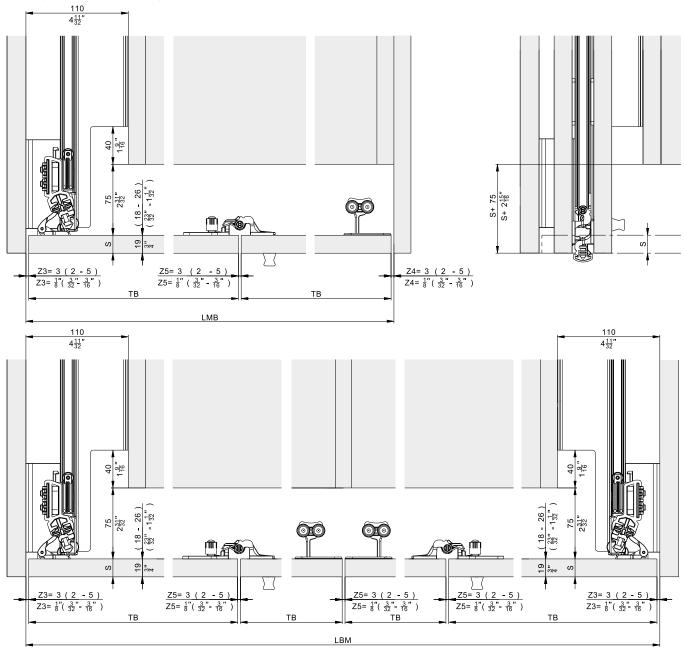

Required components

for 2-door cabinets




Hawa Folding Concepta III 20 Pull, left Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

for 4-door cabinets



Hawa Folding Concepta III 20 Pull, left/right

Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	2	31519

Hawa Folding Concepta III 20 Pull, right Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519


Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

Aluminum, black anodized


	Pcs.	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	2	31526

for 3-door cabinets



Hawa Folding Concepta III 20 Pull, left with Hawa Concepta III 25 Pull, right

Aluminum, anodized

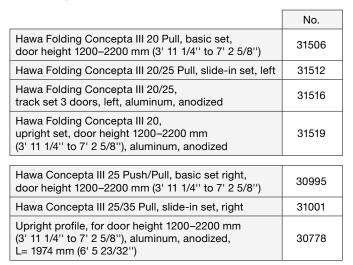


Aluminum, black anodized

Connector set 55 mm (2 5/32"),

exterior connection to cabinet, top and bottom

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2.5/20!!)	
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

Hawa Configurator



Hawa Folding Concepta III 20 Pull, right with Hawa Concepta III 25 Pull, left

Aluminum, anodized

•	
	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994

Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Connector set 55 mm (2 5/32"),	31005
exterior connection to cabinet, top and bottom	31003

Aluminum, black anodized

31005

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Connector set 55 mm (2 5/32"),	31005
exterior connection to cabinet, top and bottom	31003

List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 20 kg (44 lbs.)

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506

door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")		31506	
Set consisting	of:	31506	No.
	Slot nuts for hinge attachment, plastic, black	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	31070
	Center concealed hinge, not spring loaded, steel, matt nickel-plated	3	31362
999999	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 20 pieces	1	31532
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Soft closing mechanism	1	31222
	Stop buffer adjustable, plastic, anthracite	1	31550
	Set of adjusting tools	1	31047
6232627 6232627 6332637 6332637 6332637	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
9999	Screw set for double running track and Connector attachment at the bottom	1	31530

Suitable slide-in set

	No.
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513

Set consisting of:		31512	31513	No.
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, left	1		31004
	Pull end stop bracket, steel, zinc-plated	1	1	31541
	Slide-in securing mechanism, plastic, black	1	1	30966
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, right		1	31046

Suitable 2-door and 4-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting	of:	31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
000	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	1	31340
Running track curve, right, aluminum, anodized	1	1	31366
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	1	31337
Connector, top right, L= 788 mm (2' 7 1/32")	1	1	31371
Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")		1	31343

Upright set, aluminum, anodized

	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Set consisting	of:	31519	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 2200 mm (7' 2 5/8")	1	31230
Ø	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Suitable 3-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting	of:	31516	31517	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
	Running track front, aluminum, anodized, L= 1954 mm (6' 4 15/16")	1	1	31341
	Running track curve, left, aluminum, anodized	1		31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
90	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340

Continued table on next column

Table continued from previous column

Running track curve, right, aluminum, anodized	1	31366
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
Connector, top right L= 788 mm (2' 7 1/32")	1	31371

Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

Set consisting	of:	31521	31522	31525	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

Table continued from previous column					
	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized

	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4'' to 7' 2 5/8''), aluminum, black anodized	31526

Set consisting	of:	31526	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized, L= 2200 mm (7' 2 5/8")	1	31231
Ø	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Suitable 3-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting	of:	31523	31524	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
	Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
	Running track curve, left, aluminum, black anodized	1		31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
0	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Cover-up pen for cut edge, black	1	1	52117

Continued table on next column

Table continued from previous column

Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
Running track curve, right, aluminum, black anodized	1	31368
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
Connector, top right, L= 788 mm (2' 7 1/32")	1	31371

Reinforcement profiles

	No.
Reinforcement profile for running track front, 2765 mm (9' 27/32"), 4 doors, aluminum, anodized	52109
Reinforcement profile for running track front, 2085 mm (6' 10 3/32''), 3 doors, aluminum, anodized	52110

Base profiles

		No.
	Base profile set, 2 doors, aluminum, anodized	52089
	Base profile set, 3 doors, aluminum, anodized	52090
	Base profile set, 4 doors, aluminum, anodized	52091
	Base profile set, 2 doors, aluminum, black anodized	52092
	Base profile set, 3 doors, aluminum, black anodized	52093
	Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
Routing jig for folding hinge	52121
Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting

ightarrow Details under accessories frome page 327

Aluminum, untreated

	No.
Straightening fitting for doors 1715–2275 mm (3' 11 27/32" to 5' 9 7/8"), aluminum	056.3192.079
Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.073

Aluminum, anodized

	Nr.
Straightening fitting for doors 1715–2275 mm (5' 7 17/32" to 7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32")	056.3192.080


Aluminum, black anodized

	No.
Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081
Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, black anodized, can be shortened for doors smaller 1215 mm (3'11 27/32'')	056.3192.076

Automatic shut-off device


In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family. www.halemeier.de

Further installation examples Overlay door with base profile, 2 and 4 doors

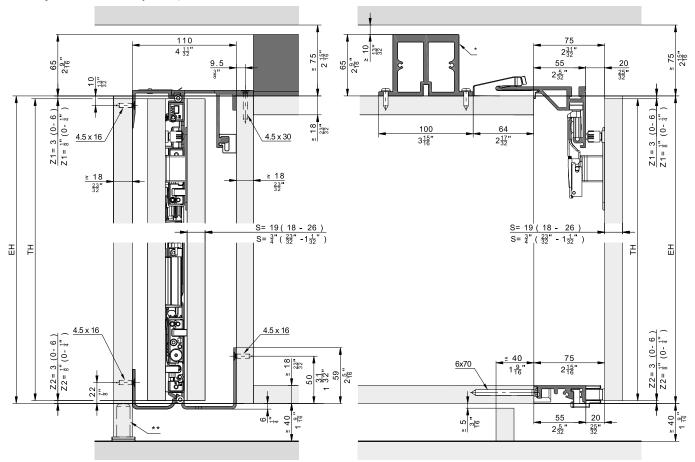

- * Reinforcement profile for 3-door and 4-door systems without separating walls
- ** Recommendation: Use adjustable foot


Floor-to-ceiling doors without base panels, 2 doors and 4 doors

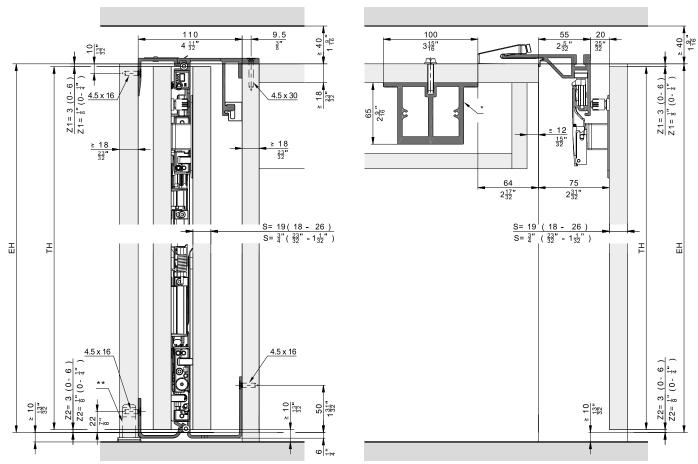


^{*} Reinforcement profile for 3-door and 4-door systems without separating walls

^{**} Recommendation: Use adjustable foot

Overlay door without base profile, 3 doors

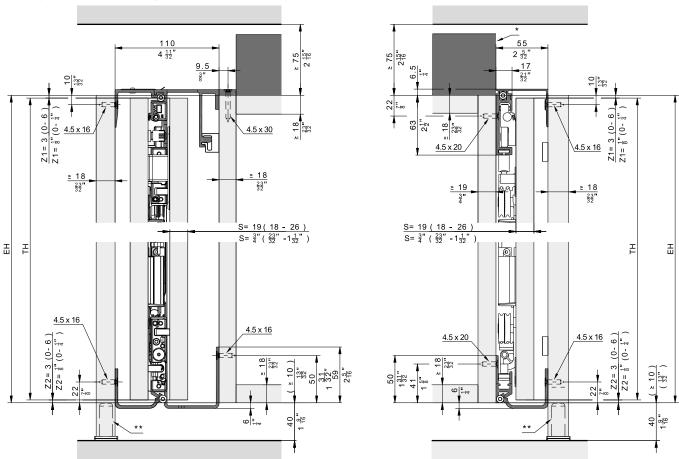



- * Reinforcement profile for 3-door and 4-door systems without separating walls
- ** Recommendation: Use adjustable foot

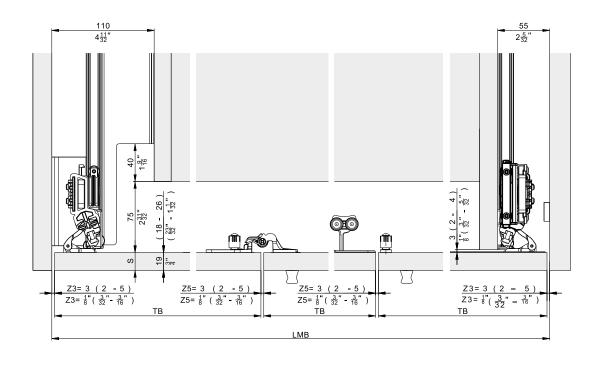


Hawa Folding Concepta III 20 Pull

Composed cabinet

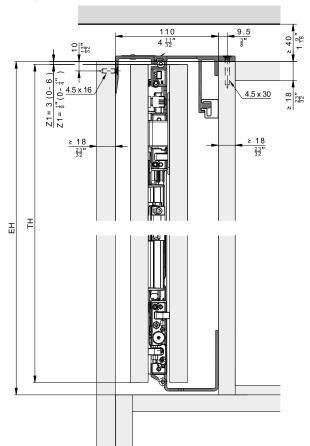


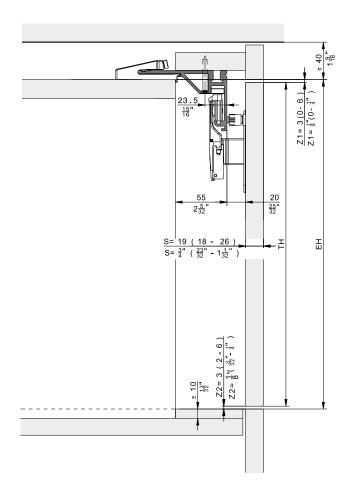




Hardware depth calculation


Flush door



Protruc	ding door	
		S+ 75 S+ 2 16" M2
$Z3 = 3 (2 - 5)$ $Z3 = \frac{1}{8}" (\frac{3}{32}" - \frac{3}{16}")$		<u>†</u>

	mm	Inch
T2	TB + 92 + Z3 - M2	TB + $3\frac{5}{8}$ " + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 15 "
M2 max.	≤ TB - 250	≤ TB - 9 ²⁷ / ₃₂ "





S = Door thickness

Z = Gap size

E2 = Slide-in depth

T2 = Hardware depth

TB = Door width

TH = Door height

KT2 = Cabinet depth

LMB = Inside clearance M2 = Door projection

over cabinet

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

Hardware for pivoting, folding and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

Flexibility Variable door dimensions, also for

floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III

Productivity Easy installation thanks to high degree of

pre-assembly and intuitive adjustment

Aesthetics Cabinet designs without handle – the technology


remains invisible

Technical specifications


10–25 kg (22 to 55 lbs.) 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')

1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'') 440–750 mm (1' 5 5/16'' to 2' 5 17/32'')

→[[← 18–26 mm (23/32'' to 1 1/32'')




Installation examples Overlay door without base profile

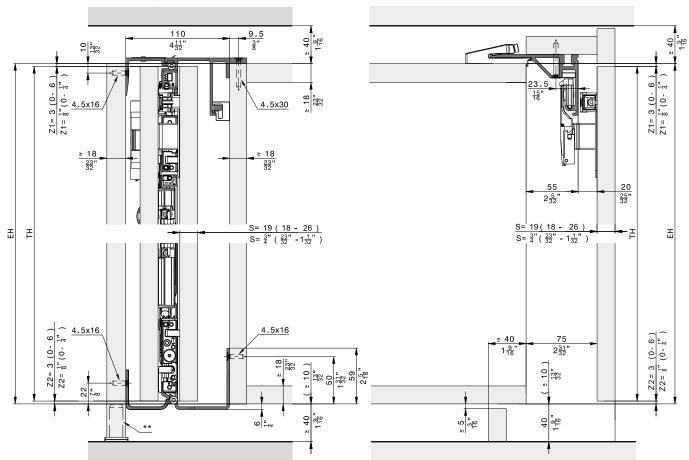


^{**} Recommendation: Use adjustable foot

Overlay door without base profile, 2 and 4 doors

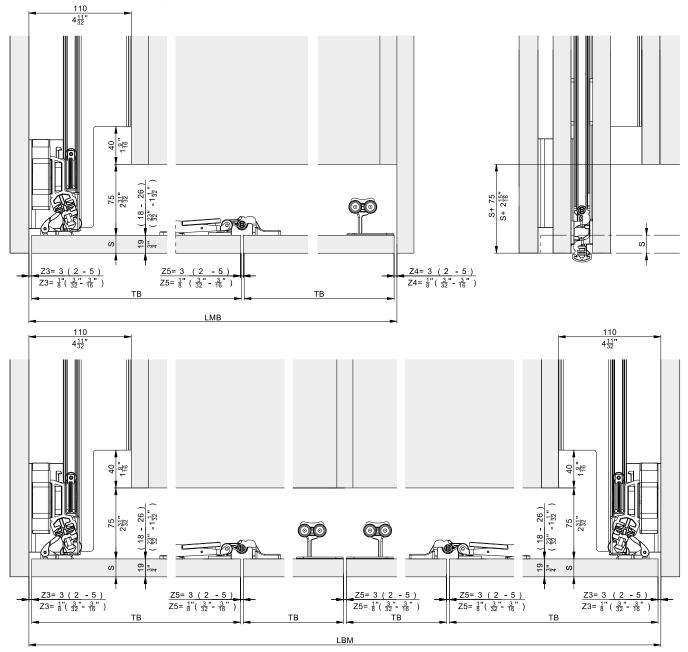


Required components

for 2-door cabinets




Hawa Folding Concepta III 25 Push, left Aluminum, anodized



Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, black anodized	31527


for 4-door cabinets



Hawa Folding Concepta III 25 Push, left/right

Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	2	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	1	31510
Hawa Folding Concepta III 25 Push, slide-in set, right	1	31511
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	2	31520



Hawa Folding Concepta III 25 Push, right Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520


Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

Aluminum, black anodized

	Pcs.	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	2	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	1	31510
Hawa Folding Concepta III 25 Push, slide-in set, right	1	31511
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	2	31527

for 3-door cabinets



Hawa Folding Concepta III 25 Push, left with Hawa Concepta III 35 Push, right

Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull hasic set right	

Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Connector set 55 mm (2 5/32"),	31005
exterior connection to cabinet, top and bottom	31003


Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized, L= 2474 mm (8' 1 13/32'')	30771

Connector set 55 mm (2 5/32"),	31005
exterior connection to cabinet, top and bottom	31003

Hawa Configurator



Hawa Folding Concepta III 25 Push, right with Hawa Concepta III 35 Push, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	30996
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Connector set 55 mm (2 5/32"),	31005
exterior connection to cabinet, top and bottom	31003

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Connector set 55 mm (2 5/32"),	31005
exterior connection to cabinet top and bottom	31003

List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 25 kg (55 lbs.)

Suitab	le sli	de-in	set

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6'2 13/16" to 8'10 5/16")	31505

(6.5 13/16 to 8.	10 5/16")		
Set consisting	of:	31505	No.
	Slot nuts for hinge attachment, plastic, black	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, without soft closing mechanism and closing spring, steel, nickel plated	4	31435
	Center concealed hinge, spring loaded, steel, matt nickel-plated	4	30794
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 26 pieces	1	31533
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
9	Screw set for Push-to-open and folding door soft closing mechanism	1	31531
	Folding door soft closing mechanism	1	31064
(10 9) \$ 1	Push-to-open for folding door	1	31332
	Counterplate for Push-to-open folding door, plastic, black	1	31036
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
30000	Screw set for double running track and Connector attachment at the bottom	1	31530

	No.
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 25 Push, slide-in set, right	31511

Set consisting	of:	31510	31511	No.
	Slide-in unit Hawa Folding Concepta III 25 Push, left	1		31002
Se	End stop bracket for Push ejector, steel, zinc-plated	1	1	52560
	Push ejector, plastic, black	1	1	52454
	Slide-in securing mechanism, plastic, black	1	1	30966
0	Adhesive plate for Push-to-open folding door, with double-sided adhesive tape, silver- gray and black	1	1	52118
	Slide-in unit Hawa Folding Concepta III 25 Push, right		1	31003

Suitable 2-door and 4-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting	of:	31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	1	31340
Running track curve, right, aluminum, anodized	1	1	31366
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	1	31337
Connector, top right L= 788 mm (2' 7 1/32")	1	1	31371
Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")		1	31343

Upright set, aluminum, anodized

	No.	
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16"), aluminum, anodized	31520	

Set consisting	of:	31520	No.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
	Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2700 mm (8' 10 5/16")	1	31232
	Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Suitable 3-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting	of:	31516	31517	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
	Running track front, aluminum, anodized, L= 1954 mm (6' 4 15/16")	1	1	31341
	Running track curve, left, aluminum, anodized	1		31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
00	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340

Continued table on next column

Table continued from previous column

Running track curve, right, aluminum, anodized	1	31366
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
Connector, top right L= 788 mm (2' 7 1/32")	1	31371

Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

Set consisting	of:	31521	31522	31525	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
0	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

Cover-up pen for cut edge, black	1	1	1	52117
Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
Running track curve, right, aluminum, black anodized		1	1	31368
Bottom guide track right, alu- minum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized

	No.	
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527	

Set consisting	of:	31527	No.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
	Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized, L= 2700 mm (8' 10 5/16")	1	31233
	Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Suitable 3-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting	of:	31523	31524	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
	Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
	Running track curve, left, aluminum, black anodized	1		31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
000	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Cover-up pen for cut edge, black	1	1	52117

Continued table on next column

Table continued from previous column

Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
Running track curve, right, aluminum, black anodized	1	31368
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
Connector, top right, L= 788 mm (2' 7 1/32")	1	31371

Reinforcement profiles

	NO.
Reinforcement profile for running track front, 2765 mm (9' 27/32"), 4 doors, aluminum, anodized	52109
Reinforcement profile for running track front, 2085 mm (6' 10 3/32''), 3 doors, aluminum, anodized	52110

Base profiles

		No.
	Base profile set, 2 doors, aluminum, anodized	52089
	Base profile set, 3 doors, aluminum, anodized	52090
	Base profile set, 4 doors, aluminum, anodized	52091
	Base profile set, 2 doors, aluminum, black anodized	52092
	Base profile set, 3 doors, aluminum, black anodized	52093
	Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
Routing jig for folding hinge	52121
Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting

→ Details under Accessories from page 327

Aluminum, untreated

	No.
Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum	056.3192.072
Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079

Aluminum, anodized

	No.
Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, anodized	056.3192.071
Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8 ''), aluminum, anodized	056.3192.082


Aluminum, black anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081

Automatic shut-off device


In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family. www.halemeier.de

Further installation examples Overlay door with base profile, 2 and 4 doors

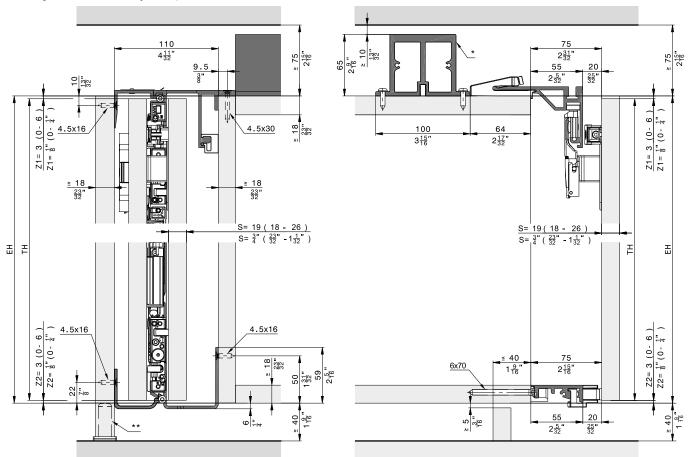


- * Reinforcement profile for 3-door and 4-door systems without separating walls
- ** Recommendation: Use adjustable foot

Floor-to-ceiling doors without base panels, 2 doors and 4 doors

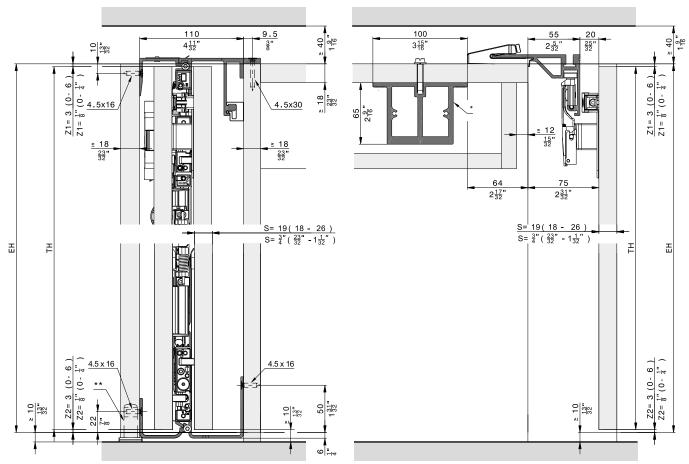


- * Reinforcement profile for 3-door and 4-door systems without separating walls
- ** Recommendation: Use adjustable foot


Overlay door without base profile, 3 doors

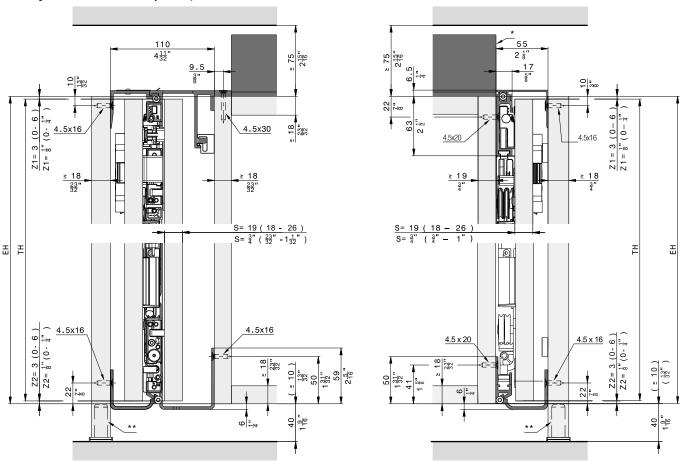



- * Reinforcement profile for 3-door and 4-door systems without separating walls
- ** Recommendation: Use adjustable foot

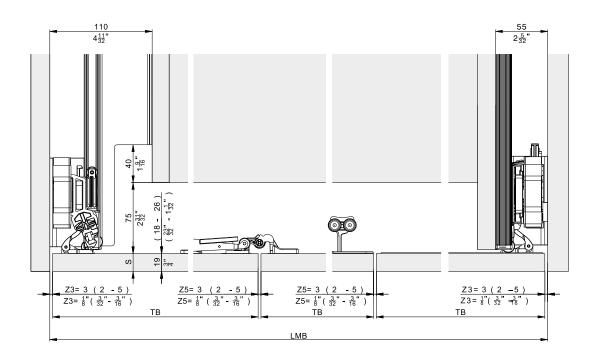


Composed cabinet

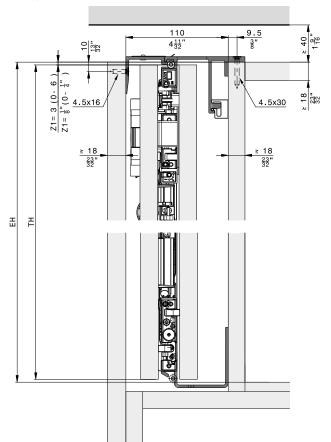


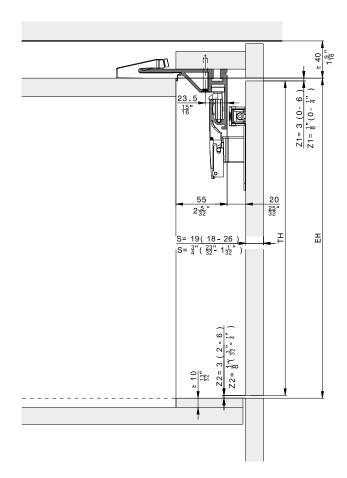





Hardware depth calculation





	mm	Inch
T2	TB + 92 + Z3 - M2	TB + $3\frac{5}{8}$ " + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 15 "
M2 max.	≤ TB - 250	≤ TB - 9 ²⁷ / ₃₂ "





S = Door thickness

Z = Gap size

E2 = Slide-in depth

T2 = Hardware depth

TB = Door width

TH = Door height

KT2 = Cabinet depth LMB = Inside clearance

M2 = Door projection

over cabinet

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

Hardware for pivoting, folding and lateral sliding in of wooden doors up to 25 kg (55 lbs). Uniform, flush front design with even gap pattern. Invisible technology. Pull version with handle.

Product highlights

Flexibility Variable door dimensions, also for

floor-to-ceiling, walk-in closets – can be

combined with Hawa Concepta III

Productivity Easy installation thanks to high degree of

pre-assembly and intuitive adjustment

Comfort Opening and closing with very little

effort - one hand is enough


Technical specifications

10–25 kg (22 to 55 lbs.)


1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')


←→ 440–750 mm (1' 5 5/16" to 2' 5 17/32")

→[|← 18–26 mm (23/32" to 1 1/32")




Installation examples Overlay door without base profile

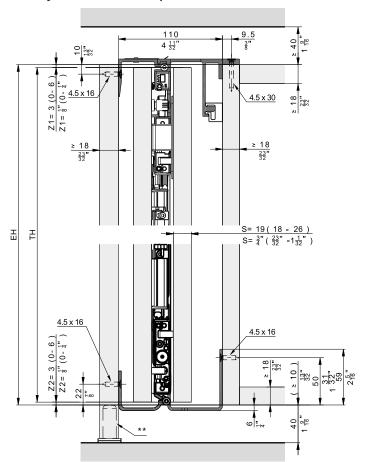

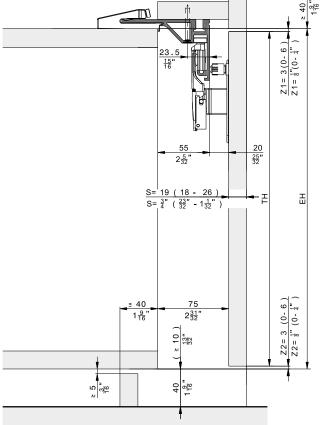

^{**} Recommendation: Use adjustable foot

Overlay door without base profile, 2 and 4 doors

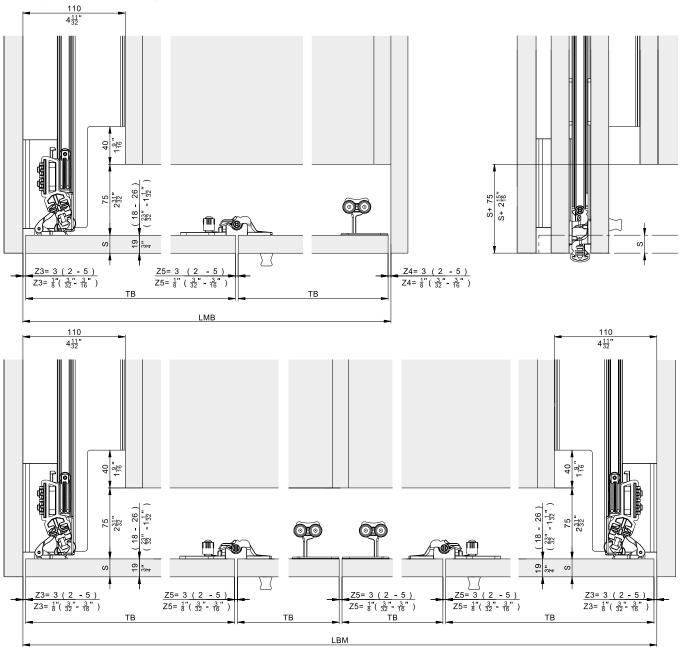


Required components

for 2-door cabinets




Hawa Folding Concepta III 25 Pull, left Aluminum, anodized



Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

for 4-door cabinets



Hawa Folding Concepta III 25 Pull, left/right

Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	2	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	2	31520

Hawa Folding Concepta III 25 Pull, right Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520


Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

Aluminum, black anodized


	Pcs.	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16'')	2	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	2	31527

for 3-door cabinets



Hawa Folding Concepta III 25 Pull, left with Hawa Concepta III 35 Pull, right


Aluminum, anodized



Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16"to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"),	0.4007
exterior connection to cabinet, top and bottom	31005

Hawa Configurator



Hawa Folding Concepta III 25 Pull, right with Hawa Concepta III 35 Pull, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16"to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996

,	
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Connector set 55 mm (2 5/32"),	31005	
exterior connection to cabinet, top and bottom	31003	

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16"to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Connector set 55 mm (2 5/32"),	31005
exterior connection to cabinet, top and bottom	31003

List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 25 kg (55 lbs.)

Suitable slide-in set

		No.	
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")		31507	
Set consisting of:		31507	No.
	Slot nuts for hinge attachment, plastic, black	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	31070
	Center concealed hinge, not spring loaded, steel, matt nickel-plated	4	31362
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 26 pieces	1	31533
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Soft closing mechanism	1	31222
	Stop buffer adjustable, plastic, anthracite	1	31550
	Set of adjusting tools	1	31047
93952 93952 939593 939593 939593 939593 93959	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
9999	Screw set for double running track and Connector attachment at the bottom	1	31530

	No.
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513

Set consisting	of:	31512	31513	No.
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, left	1		31004
	Pull end stop bracket, steel, zinc-plated	1	1	31541
	Slide-in securing mechanism, plastic, black	1	1	30966
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, right		1	31046

Suitable 2-door and 4-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting	of:	31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	1	31340
Running track curve, right, aluminum, anodized	1	1	31366
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	1	31337
Connector, top right, L= 788 mm (2' 7 1/32")	1	1	31371
Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")		1	31343

Upright set, aluminum, anodized

	No.	
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16'' to 8' 10 5/16''), aluminum, anodized	31520	

Set consisting	of:	31520	No.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
	Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2700 mm (8' 10 5/16")	1	31232
	Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Suitable 3-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting of:		31516	31517	No.
3	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
	Running track front, aluminum, anodized, L= 1954 mm (6' 4 15/16")	1	1	31341
	Running track curve, left, aluminum, anodized	1		31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
00	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340

Continued table on next column

Table continued from previous column

Running track curve, right, aluminum, anodized	1	31366
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
Connector, top right, L= 788 mm (2' 7 1/32")	1	31371

Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

Set consisting	of:	31521	31522	31525	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

lable continued from p	Tovious ociairiii				
	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized

	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

Set consisting	of:	31527	No.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
	Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized, L= 2700 mm (8' 10 5/16")	1	31233
	Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Suitable 3-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting	of:	31523	31524	No.
5	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
	Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
	Running track curve, left, aluminum, black anodized	1		31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
0	Track support and Connector part for running track curve	1	1	31543
	Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
	Stop set 3 doors Push/Pull	1	1	31538
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
an Ti	Cover-up pen for cut edge, black	1	1	52117

Continued table on next column

Table continued from previous column

Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
Running track curve, right, aluminum, black anodized	1	31368
Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
Connector, top right, L= 788 mm (2' 7 1/32")	1	31371

Reinforcement profiles

	No.
Reinforcement profile for running track front, 2765 mm (9' 27/32''), 4 doors, aluminum, anodized	52109
Reinforcement profile for running track front, 2085 mm (6' 10 3/32''), 3 doors, aluminum, anodized	52110

Base profiles

		No.
	Base profile set, 2 doors, aluminum, anodized	52089
	Base profile set, 3 doors, aluminum, anodized	52090
	Base profile set, 4 doors, aluminum, anodized	52091
	Base profile set, 2 doors, aluminum, black anodized	52092
	Base profile set, 3 doors, aluminum, black anodized	52093
	Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
Routing jig for folding hinge	52121
Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting

→ Details under Accessories from page 327

Aluminum, untreated

	No.
Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum	056.3192.072
Straightening fitting for doors 1715–2275 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum	056.3192.079

Aluminum, anodized

	No.
Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, anodized	056.3192.071
Straightening fitting for doors 2040–2600 mm (6' 8 5/16'' to 8' 6 3/8 ''), aluminum, anodized	056.3192.082

Aluminum, black anodized


		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32" to 7' 5 9/16"), aluminum, black anodized	056.3192.081

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family. www.halemeier.de


Centering parts 11 24=3(2-5)

Further installation examples Overlay door with base profile, 2 and 4 doors

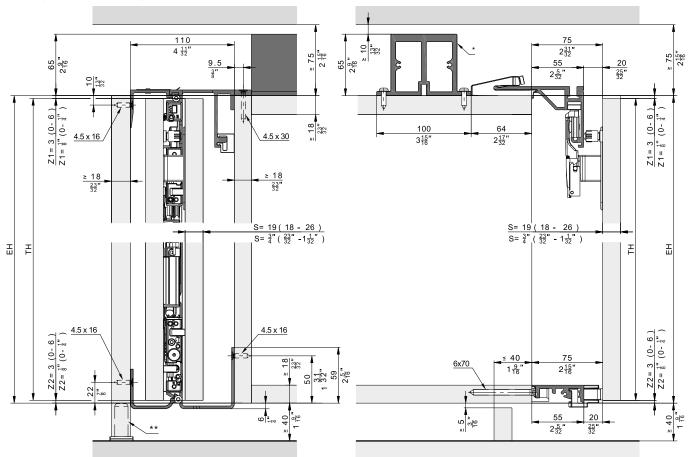


- * Reinforcement profile for 3-door and 4-door systems without separating walls
- ** Recommendation: Use adjustable foot

Floor-to-ceiling doors without base panels, 2 doors and 4 doors

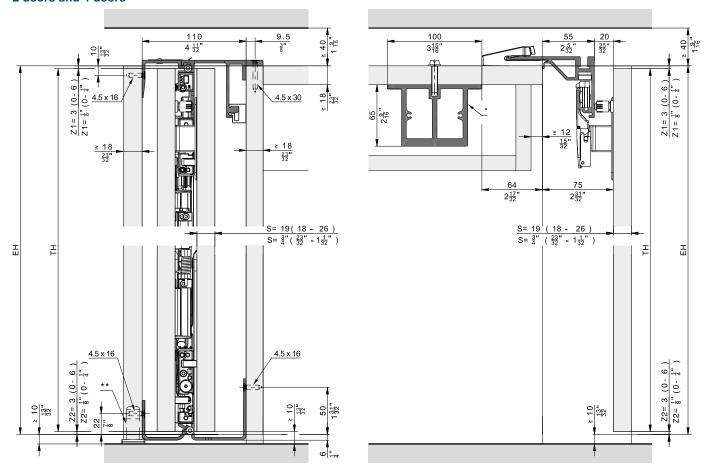


- * Reinforcement profile for 3-door and 4-door systems without separating walls
- ** Recommendation: Use adjustable foot


Overlay door without base profile, 3 doors

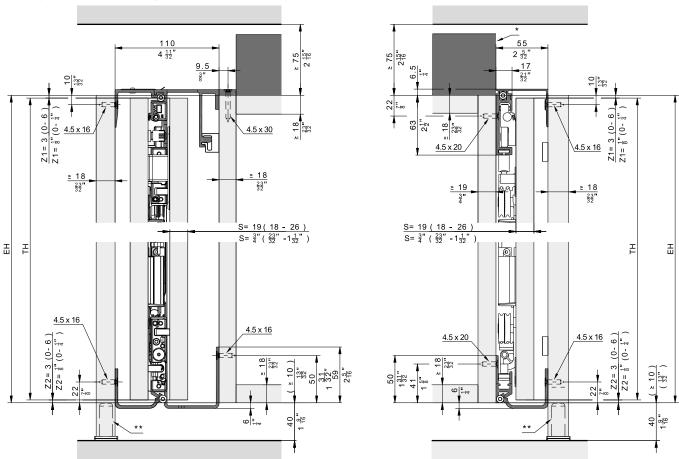



- * Reinforcement profile for 3-door and 4-door systems without separating walls
- ** Recommendation: Use adjustable foot

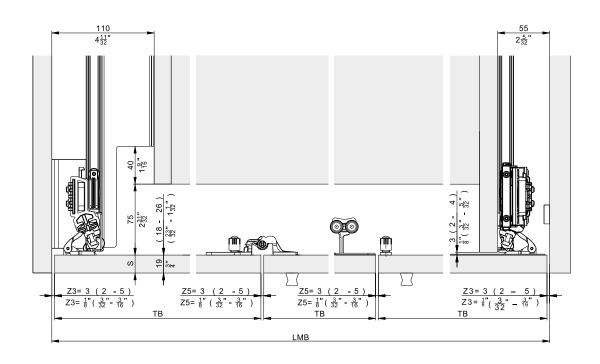

Composed cabinet

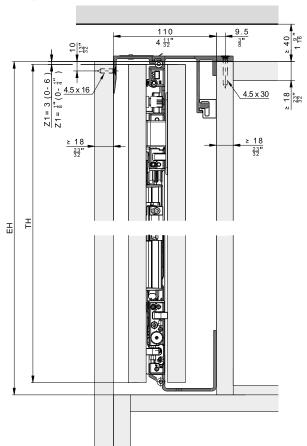


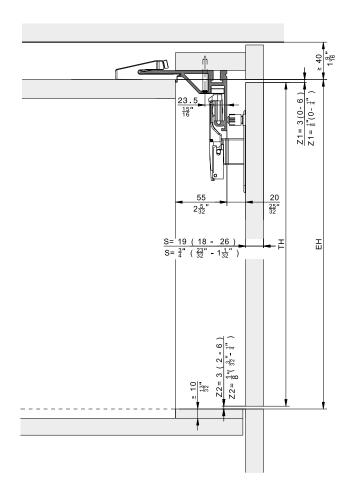




Hardware depth calculation


Flush door



Protruc	ding door		
		S + 2 5 1 1 1 2 1 1 1 2 1 1 1 1 1 1 1 1 1 1	M2
$ \frac{Z3 = 3 (2 - 5)}{Z3 = \frac{3}{8}" \left(\frac{3}{32}" - \frac{3}{16}"\right)} $		<u> </u>	

	mm	Inch
T2	TB + 92 + Z3 - M2	TB + $3\frac{5}{8}$ " + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 15 "
M2 max.	≤ TB - 250	≤ TB - 9 ²⁷ / ₃₂ "





S = Door thickness

Z = Gap size

E2 = Slide-in depth

T2 = Hardware depth

TB = Door width

TH = Door height

KT2 = Cabinet depth

LMB = Inside clearance

M2 = Door projection

over cabinet

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.



The right sliding solution on furniture for every need and every idea

On furniture		Techni	cal specifica	itions				Desig	gn/insta	allation			Operation		Recommended application			
	\triangle	$\to \Big[\Big] \leftarrow$	$\uparrow \llbracket$	$\stackrel{\leftarrow \rightarrow}{ }$	D							\rightarrow	Œ	<u></u>	Ŷ	ŶŶ	ŶŶŶ	
Wood		·																
Sliding doors																		
Hawa 220 Planfront	70	19–45	2600	400–1500					Х		Х				Х	Х	Х	
Hawa 220 Planfront 70	70	19–45	2600	400–1500					Х		Х				Х	Х	Х	
Hawa Clipo	15/16/ 26/36	16–25	2400	1000	Х	х	Х	х	Х		Х				Х	х	х	
Hawa Clipo 15 H IS	15	16–19	1400	1000		x			х						Х	Х		
Hawa Clipo 15 H MS	15	16–19	1400	1000			Х								Х	Х		
Hawa Clipo 15 H FS	15	min. 19	1400	1000							Х				Х	Х		
Hawa Clipo 16 H IS	16	16–19	1400	1000	Х	Х			Х						Х	Х	Х	
Hawa Clipo 16 H MS	16	16–19	1400	1000	Х		Х								Х	Х	Х	
Hawa Clipo 16 H FS 4-point guidance	16	min. 16	1400	1000	Х						Х				Х	Х	Х	
Hawa Clipo 16 H IS/MS	16	16–19	1400	1000	Х				Х	Х					Х	Х	Х	
Hawa Clipo 16 H IS/FS	16	16–19	1400	1000	Х				х		х				Х	х	х	
Hawa Clipo 16 HM IS	16	min. 19	1400	1000	Х	х			Х						Х	Х	Х	
Hawa Clipo 26/36 H IS	26/36	19–25	2200	1000	Х	Х			Х						Х	Х	Х	
Hawa Clipo 26 H MS	26	19	2200	1000	Х		Х			Х					Х	Х	Х	
Hawa Clipo 36 H MS	36	25	2400	1000	Х		Х			Х					Х	Х	Х	
Hawa Clipo 36 HM IS	36	19–25	2400	1000	Х	х			Х						Х	Х	Х	
Hawa Combino	20/35/ 40/50/ 65/80	19–40	2800	1600	х	х	х	х	х	х	х				Х	х	х	
Hawa Combino 20/35 H IS	65/80	19	2200	1200	Х	Х			Х						Х	Х	Х	
Hawa Combino 20/35 H MS	20/35	19	2200	1200	Х		Х								Х	Х	Х	
Hawa Combino 20/35 H FS	20/35	19	2200	1200	Х			Х							Х	Х	Х	
Hawa Combino 50 H MS	50	19–25	2400	1400	Х		Х								Х	Х	Х	

		Techni	cal specifica	tions				Desig	n/insta	llation			Oper	ation		comme	
On furniture	命	\rightarrow $[$ \leftarrow	↑ []	$\leftarrow \rightarrow$	D		00_						Œ,	É	Ŷ	ŶŶ	ŶŶŶ
Wood														•			
Sliding doors																	
Hawa Combino 50 H FS	50	19–25	2400	1400	Х			Х							Х	Х	Х
Hawa Combino 65 H IS ol	65	25–40	2600	1400	Х	Х			Х						Х	Х	Х
Hawa Combino 65 H MS ol	65	25	2600	1400	Х		Х								Х	Х	Х
Hawa Combino 65 H FS ul	65	25	2600	1400	Х			Х							Х	Х	Х
Hawa Combino 65 H FS ol	65	19–40	2600	1400	Х			Х							Х	Х	Х
Hawa Combino 80 H FS ul	80	25/40	2800	1600	Х			Х							Х	Х	Х
Hawa Combino 80 H FS ol	80	19–40	2800	1600	Х			Х							Х	Х	Х
Hawa Combino L 40	40	19	1500	1500	Х			Х			Х				Х	Х	Х
Hawa Combino L 40 H FS	40	19	1500	1500	Х			Х			Х				Х	Х	Х
Hawa Combino L 40 H FS Synchro	40	19	1500	800				Х			Х				Х	Х	Х
Hawa Creation (H/G combination)	25	6/19	2200	1200	Х				Х		Х				Х	Х	Х
Hawa Creation 25 H IS/FS	25	19	2200	1200	Х				Х		Х				Х	Х	Х
Hawa Creation 25 GAK/H IS/FS	25	6(19)	2000 (2100)	1000 (1200)	Х				Х		Х				Х	х	Х
Hawa Frontal	25	19	2000	800	Χ			Х							Х	Х	Х
Hawa Frontal 25 H FS	25	19	2000	800	Х			Х							Х	Х	Х
Hawa Frontino	20/40	19–25	2400	600–1200	Х						Х				Х	Х	Х
Hawa Frontino 20 H FS ul	20	19–25	1000	600–1200	Х						Х				Х	Х	Х
Hawa Frontino 20 H FS ol	20	19–25	1000	600–1200	Х						Х				Х	Х	Х
Hawa Frontino 20 H OS FS	20	19–25	1000	600–1200	Х						Х				Х	Х	Х
Hawa Frontino 40 H FS	40	19	2400	600–1200	Х						Х				Х	Х	
Hawa Libra	20	16–30	1000	1600					Х		Х				Х	Х	Х
Hawa Libra 20 H IS/FS	20	16–30	1000	1600					Х		Х				Х	Х	Х
Hawa Libra 20 H IS/FS Synchro	20	16–30	1000	1600					Х		Х				Х	Х	Х
Hawa Miniroll	15/25	19–40	2600	1500		Х			Х						Х	Х	Х
Hawa Miniroll 15/25	15/25	19–40	2600	1500		х			х						Х	Х	Х
Hawa Regal A	25/40	19–50	2500	1200	Х						Х				Х	Х	Х
Hawa Regal A 25 H FS	25	19–25	2400	1200							Х				Х	Х	Х
Hawa Regal A 40 H FS	40	19–50	2500	1200	Х						Х				Х	Х	Х
Hawa Regal B (H/G combination)	25	16–50	2000	1200	Х	Х			Х		Х				Х	Х	
Hawa Regal B 25 H IS	25	16–50	2000	1200	Х	Х			Х						Х	Х	Х
Hawa Regal B 25 H FS	25	16–50	2000	1200	Х						Х				Х	Х	Х
Hawa Regal B 25 HG FS	25	4–6 (23–25)	1800	1200							Х				Х	Х	Х
Hawa Regal B 25 H X FS	25	16–50	2000	1200	Х						Х						
Hawa Regal C	16/26	16–19	2200	1200	Х	Х			Х		Х				Х	Х	Х
Hawa Regal C 16 H IS/FS	16	4/16	1400	1000	Х						Х				Х	Х	Х
Hawa Regal C 16 H IS	16	19	1400	1000	Х				Х								
Hawa Regal C 16 HM IS	16	19	1400	1000	Х				Х						Х	Х	Х
Hawa Regal C 26 HM IS	26	19	2200	1200	Х	Х			Х						Х	Х	Х
Sliding doors, stackable	,						,	,	,	,	,	,	1	·			,
Hawa Aperto	40	19–25	2600	400–900					Х			Х			Х	Х	Х
Hawa Aperto 40 F	40	19–25	2600	400–900					Х			Х			Х	Х	Х

Sliding on furniture product overview

		Techni	ical specifica	itions		Design/installation Operati							ation	Recommended application			
On furniture	\triangle	$\rightarrow \left[\right] \leftarrow$	$\uparrow \llbracket$	$\stackrel{\leftarrow}{\longmapsto}$	D							\Box	ŒĐ)	-(III)-	Î	ŶŶ	ŶŶŶ
Wood																	
Pivot and folding/sliding doors																	
Hawa Concepta III	25/35	18–26	1200–2700	450–750	Х				Х		Х	Х	Х	Х	Х	Х	Х
Hawa Concepta III 25 Push	25	18–26	1200–2200	440–750	Х				Х		Х	Х	Х		Х	Х	Х
Hawa Concepta III 25 Pull	25	18–26	1200–2200	440–750	Х				Х		Х	Х		Х	Х	Х	Х
Hawa Concepta III 35 Push	35	18–26	1900–2700	440–750	Х				Х		Х	Х	Х		Х	Х	Х
Hawa Concepta III 35 Pull	35	18–26	1900–2700	440–750	Х				Х		Х	Х		Х	Х	Х	Х
Hawa Folding Concepta III	20/25	18-26	1200–2700	440–750					Х		Х	Х	Х	Х	Х	Х	-
Hawa Folding Concepta III 20 Push	20	18–26	1200–2200	440–750					Х		Х	Х	Х		Х	Х	
Hawa Folding Concepta III 20 Pull	20	18–26	1200–2200	440–750					Х		Х	Х		Х	Х	Х	
Hawa Folding Concepta III 25 Push	25	18–26	1900–2700	440–750					Х		Х	Х	Х		Х	Х	
Hawa Folding Concepta III 25 Pull	25	18–26	1900–2700	440–750					Х		Х	Х		Х	Х	Х	
Hawa Concepta	25/30/ 40/50	19–50	1250–2850	300–900	х				х		Х	Х		х	Х	х	х
Hawa Concepta 25	25	19–50	1250–1850	300–750	Х				Х	Х	Х	Х		Х	Х	Х	Х
Hawa Concepta 30	30	19–50	1851–2300	300–900	Х				Х	Х	Х	Х		Х	Х	Х	Х
Hawa Concepta 40	40	19–50	1851–2500	300–900	Х				Х	Х	х	Х		Х	Х	Х	Х
Hawa Concepta 50	50	19–50	2301–2850	300–900	Х				Х	Х	Х	Х		Х	Х	Х	Х
Hawa Folding Concepta	25	19–26	1250–2600	300–700					Х	Х	Х	Х		Х	Х	Х	
Hawa Folding Concepta 25	25	19–26	1250–2600	300–700					Х	Х	Х	Х		Х	Х	Х	
Folding sliding doors																	
Hawa Multifold	30	19–25	2600	200–650					Х	Х	Х	Х			Х	Х	Х
Hawa Multifold 30	30	19–25	2600	200–650					Х	Х	Х	Х			Х	Х	Х
Hawa Multifold 30/W	30	19–25	2600	200–500					Х	Х	Х	Х			Х	Х	Х
Pull-outs												•	•				•
Hawa Forte	170/340	16–40	2400	800	Х						Х			Х	Х	Х	Х
Hawa Forte 170	170	16–40	2200	600	Х						Х			Х	Х	Х	Х
Hawa Forte 340	340	16–40	2400	800							Х			Х	Х	х	х
Hawa Forte 170 DS	170	16–40	2200	600	Х						Х			Х	Х	Х	Х

		Technic	cal specificat	tions				Desig	gn/inst	allation		Ope	ration	Recommended application			
On furniture		$\to \Big[(\leftarrow$	$\uparrow \llbracket$	$\leftarrow \rightarrow$	D							چ <u>ي</u>	E)	Ŷ	ŶŶ	ŶŶŶ	
Glass			•												•		
Sliding doors																	
Hawa Clipo	16/26/36	4–8 (12/22)	2000	1000	х	х			Х					Х	х	х	
Hawa Clipo 16 GK IS	16	6–6.35	1400	1000	Х	Х			Х					Х	Х	Х	
Hawa Clipo 16 GS IS	16	6-6.35	1400	1000	Х	Х			Х					х	Х	Х	
Hawa Clipo 16 GPK/GPPK IS	16	6–6.35 (12)	1400	1000	х	х			х					х	х	х	
Hawa Clipo 26 GR IS	26	4 (20)	2000	800	Х	Х			Х					Х	Х	Х	
Hawa Clipo 36 GPK/GPPK IS	36	6-8 (12)	2000	1000	Х	х			Х					Х	Х	Х	
Hawa Clipo 36 GPPK IS fixed glass	36	6-8 (12)	2000	1000	Х	х			Х					Х	Х	Х	
Hawa Clipo 36 G IS	36	6-8 (20-22)	2000	1000	х	х			х					х	х	х	
Hawa Frontal	25	4/6 (20/22)	2200	800	х			х						х	х	х	
Hawa Frontal 25 GK FS	25	6	2000	800	Х			Х						х	Х	Х	
Hawa Frontal 25 GR 20/20 FS	25	4 (20)	2000	800	Х		-	Х						х	Х	Х	
Hawa Frontal 25 GR 40/22 FS	25	4 (22)	2000	800	Х			Х						Х	Х	Х	
Hawa Regal A	25	4 (22)	2200	1200							Х			Х	Х	Х	
Hawa Regal A 25 GR FS	25	4 (22)	2200	1200							Х			Х	Х	Х	
Hawa Regal B	25	4–8	1800	1200	Х						Х			Х	Х	Х	
Hawa Regal B 25 SP FS	25	4–8	1800	1200	Х						Х			х	Х	Х	
Hawa Regal 25 GK FS	25	4–6	1800	1200	Х		-				Х			Х	Х	Х	
Hawa Regal 25 X FS	25	4–8	1800	1200	Х						Х			Х	Х	Х	
Hawa Regal C	16/26	4-6.35 (12/20)	2000	1000	х	х					х			х	Х	х	
Hawa Regal C 16 GPPK IS	16	6–6.35 (12)	1400	1000	х				Х					х	х	х	
Hawa Regal C 26 GR IS	26	4 (20)	2000	800	Х	Х					Х			Х	Х	Х	

Glass recommendations on furniture

	Float glass	ESG Fully tempered monolitic safety glass	VSG (from float glass) Laminated glass made from float glass	VSG (from ESG) Laminated glass made from tempered safety glass	VSG (from TVG) Laminated glass made from heat-strenghtened glass
On furniture					
Hawa Clipo 16 GPK IS Hawa Clipo 16 GPPK IS Hawa Clipo 26 GR IS Hawa Clipo 36 G IS Hawa Clipo 36 GPK IS Hawa Clipo 36 GPPK IS Hawa Clipo 36 GPPK IS Hawa Clipo 36 GPPK IS Fixed glass	(O)	•			
Hawa Clipo 16 GS IS Hawa Clipo 16 GK IS		•	[0]		

Recommended by Hawa Sliding Solutions

[O] With restrictions (float glass due to breaking resistance/laminated glass made from float glass due to appearance of glass edges)

Application not recommended for aesthetic reasons, since misalignment of up to 4 mm may occur due to technical reasons during production.

Float

Float glass is conventional structural glass that is manufactured using the so-called float process (floating a on a bath of molten tin).

ESG

Fully tempered monolitic safety Glass with a minimum surfacae compresion of 15'000 psi. (DIN EN 12150-1). It is manufactured using special heat treatment. When the glass breaks, tempered safety glass shatters into small blunt-edged fragments. Tempered safety glass has extremely good resilience to breakage, bending resistance, impact resistance and thermal shock resistance.

VSG

Laminated glass (DIN EN 14449) is produced by bonding two or more of glass together by means of one or more extremely flexible polyvinyl butyral (PVB) interlayers (0.38–max. 0.76 mm). When laminated glass breaks, the fragments adhere to the interlayer.

TVG

Heat-strengthened glass is thermally treated float glass and has a breakage pattern similar to glass that has not been thermally treated. It is more resistant to stress and impact than untreated glass.

General information

- Products have been tested in accordance EN 15706 and EN 15570)
- Maximum door weights and door dimensions see respective catalog pages. The maximum door weight may not be exceeded!
- The products are inapplicable for outdoor applications/use.
- With high gloss lacquered doors use material that is at least 20 mm thick, in order to avoid damaging the finish with the screws
- The length dimensions of the standard profiles from the Hawa range are subject to DIN ISO 2768-1 c (+/-4 mm)
- Subject to technical modifications. No liabilty assumed.

Door weight calculation Hawa Combino/Hawa Clipo

H H	Chipboard					MDF		Glass			
Door weight	s										
D mm	16	19	22	25	16	19	25	4	6	8	
B × H											
500 × 1200	6.6	7.8	8.7	9.9	7.5	8.7	11.4	6.0	9.0	12.0	
500 × 1800	9.9	11.7	13.1	14.9	11.3	13.1	17.1	9.0	13.5	18.0	
600 × 1800	11.9	14.0	15.7	17.8	13.5	15.7	20.6	10.8	16.0	21.6	
600 × 2200	14.5	17.2	19.1	21.8	16.5	19.2	25.1	13.2	19.8	26.4	
600 × 2400	15.8	18.7	20.9	23.8	18.0	20.9	27.4	14.4	21.6	28.8	
800 × 1800	15.8	18.7	20.9	23.8	18.0	20.9	27.4	14.4	21.6	28.8	
800 × 2200	19.4	22.9	25.5	29.0	22.0	25.6	33.5	17.6	26.4	35.2	
800 × 2400	21.1	25.0	27.8	31.7	24.0	27.9	36.5	19.2	28.8	38.4	
1000 × 1200	13.2	15.6	17.4	19.8	15.0	17.4	22.8	12.0	18.0	24.0	
1000 × 2400	26.4	31.2	34.8	39.6	30.0	34.8	45.6	24.0	36.0	48.0	
kg/m²	11.0	13.0	14.5	16.5	12.5	14.5	19.0	10.0	15.0	20.0	

The right sliding solution for every need and every idea

Our overall product range for sliding solutions on buildings, in buildings and on furniture covers all requirements in all areas of application, movement types and sliding versions,

This overall product range will undergo continuous further development, Hawa Sliding Solutions also provides individual, made-to-measure solutions, Special solutions such as this are developed in close collaboration with our partners and customers, Perhaps together with you?

<u> </u>		Technical specifications							Design/installation				Operation		Exterior application	
buildings	\triangle	→[]←	^ []	$\stackrel{\leftarrow}{=}$	rm²	→[]]-(∫m²		A		00_		E	-(1)-	9	Ţ
Sliding shutters	Sliding shutters															
Hawa Frontslide	60/ 100/140	28–60	3200	min. 400	9,6	7500	14.7	х	х	х	х				х	
Hawa Frontslide Matic	60/ 100/140	28–60	3200	min. 550	6,24	7500	14.7	х	х	х	х				х	
Folding sliding shutters									•		•	•				•
Hawa Frontfold	30	28–36	3200	200–600		12000	38.4	Х							Х	Х
Hawa Frontego	30	28–32	700–3200	300–600	1.92	3.6 m	2×12	Х							Х	Х
Special solution, stackable	,															
Hawa Aperto	60	35–50	2600	550–950	2.47	min. 550	min. 1	Х							Х	
Windows																
Hawa Vertical	150	85	1200*	3200**					Х						Х	Х

 $^{^{\}star}\,$ With a height of 1,200 mm, the width is limited to 2,000 mm because of the pulley

^{**}With a width of 3,200 mm, the height is limited to 900 mm because of the pulley

In	Technical specifications						Instal	lation			Oper	ation	ı	comme pplicat		Exterior application			
∟⊔ buil	dings	\triangle	$\rightarrow \left[\right] \leftarrow$	$\uparrow \llbracket$	$\stackrel{\leftarrow}{\Longrightarrow}$	$\not \leftarrow \rightarrow$	D		ū	Ŋ	99	<u>\$</u>	\prod	Ę		Ŷ	βĝ	ŶŶŶ	Q İ
Wood															•			•	
Sliding doors																			
Hawa Junior		40/80/ 100/120 160/250	35–80	4000	3000		40/80/ 100/120	х	х	х	х		х			х	х	х	
Hawa Media		70	35–80	4000	3000			Х	Х		Х					Х	Х		
Hawa Ordena		70	30-40	2600	3000				Х	Х	Х					Х	Х		
Hawa Porta		40/45/ 60/100 300/600	18–100	6000	5000		40/60/ 100	х	х	х	х					х	х	х	
Hawa Silenta		150	35–80	4000	3000				Х	Х	Х					Х	Х		
Hawa Super		500	45–100	6000	5000			х	Х		Х					х	Х	Х	
Hawa Suono		100	min. 51	2700	700	1340	Х	х			Х					х	Х	Х	
Sliding walls															•				
Hawa Aperto		60	35-50	2600	550-1500	13600			Х		Х		Х			Х	Х	х	Х
Hawa Junior		80	32-80	4000	500–1200	6750			Х		Х		Х			Х	Х	Х	
Hawa Divido		100	28-30	2400	1200	6000	Х	Х	Х	Х	Х	Х				Х	Х	х	
Hawa Variotec		150	36-68	4000	700–1500	12000			Х		Х		Х			Х	Х	х	
Folding sliding	g walls									•	•		•						
Hawa 20 c Fold	ding wall	120	42-80	4000	1000	7000			Х		Х		Х			х	Х	Х	
Hawa Centerfo	ld	80	35–45 (57)	4000	500–900	6000			х	Х	х		х			х	Х	х	
Hawa Variofold	ı	80	35–45 (57)	4000	500-900	6310			х	Х	х		Х			Х	х	х	
Transport sys	tems								,							ı			
Hawa Varioflex		40	35–80	4000	900				Х		Х						X		
Class																			
Glass Sliding doors																			
Hawa Junior		40/80/ 100/120 160/250	8–16	4000	3000		40/80/ 100/120	х	x	х	х					х	х	х	
Hawa Ordena		70	8–10.7	2600	600-3000				Х	Х	Х					Х	Х	Х	
Hawa Porta		40/100		2700	1600		40/60/ 100	х	Х	Х	х					Х	Х	х	
Hawa Puro		150	8–12.7	3000	750–3000				Х	Х	Х					Х	Х	Х	
Hawa Purolino	Plus	80	8–12.7	3000	600–3000		Х	х	Х	Х	Х					Х	Х	Х	
Hawa Super		250	8-80	4000	3000			х	Х		Х						Х	Х	
Sliding walls															•				•
Hawa Aperto		60	8–10 (30)	2600	500–1100	10900			х		Х		х			х	Х	х	х
Hawa Divido		100	5.9–10 (30)	2750	1200	6000	Х	х	х	Х	Х	Х				х	Х	х	
Hawa Shopfror	nt	400	8–16 (50)	3500	3000	12000			х		Х						Х	х	х
Hawa Variotec		150	10–13 (36)	3500	700–1500				х		Х		х				х	х	х
Folding sliding	g walls																		
Hawa Centerfo	ıld	80	10–13 (36)	2600	500-900	6000			х	х	х		х				х	х	Х
Hawa Variofold	I	80	10–13 (36)	2600	400–900	6310			х	х	х						Х	х	Х
Hawa Junior		80	8–16 (26)	3000	500–1200	3700			х		х		Х			х	х	х	
Shower																			
Hawa Banio		40	8–9	2200	800	1500	Х	Х			Х					х	Х	Х	

On On		Techni	ical specifica	ations				Desig	ın/insta	allation			Operation		Recommended application		
furniture		$\rightarrow \left[\right] \leftarrow$	↑ []	$\stackrel{\leftarrow}{-\!\!\!-}$	D		00_					$\overline{\square}$	E	- (1)-	Î	ŶŶ	ŶŶŶ
Wood																	
Sliding doors																	
Hawa 220 Planfront	70	19–45	2600	400–1500					Х		Х	Х			Х	Х	Х
Hawa Aperto	40	19–25	2600	400–900					Х						Х	Х	Х
Hawa Clipo	15/16/ 26/36	10–25	2400	1200	Х	Х	х	х	Х		Х				Х	Х	х
Hawa Combino	20/35/ 40/50/ 65/80	19–40	2800	1600	х	x	х	х			х				X	х	х
Hawa Creation	65/80	6/19	2200	1200	Х	х		Х							Х	Х	Х
Hawa Frontal	25	19	2000	800	Х			Х							Х	Х	Х
Hawa Frontino	20/40	19–25	2400	600–1200	Х						Х				Х	Х	Х
Hawa Libra	20	16–30	1000	1600					Х		Х				Х	Х	Х
Hawa Miniroll	15/25	19–40	2600	1500		х									Х	Х	Х
Hawa Regal A	25/40	19–50	2500	1200	Х						Х				Х	Х	Х
Hawa Regal B	25	16–50	2000	1200	Х	х			х		Х				Х	Х	Х
Hawa Regal C	16/26	16–19	2200	1200	Х	х			Х		Х				Х	Х	Х
Pivot and folding/sliding dod	ors							•	•	<u>.</u>	•	•				•	
Hawa Concepta III	25/35	18–26	1200–2700	440–750	Х				Х		Х	Х	Х	х	Х	Х	Х
Hawa Folding Concepta III	20/25	18–26	1200–2700	440–750					Х		Х	х	х	х	Х	х	
Hawa Concepta	25/30/ 40/50	19–50	1250–2850	300–900	Х				х	х	Х	х		х	Х	х	Х
Hawa Folding Concepta	25	19–26	1250–2600	300–700					Х	Х	Х	Х		х	Х	Х	
Folding sliding doors																	
Hawa Multifold	30	19–25	2600	200–650					Х	Х	Х				Х	Х	Х
Pull-outs																	
Hawa Forte	170/340	16–40	2400	800	Х						х			Х	Х	Х	Х
Glass																	
Sliding doors																	
Hawa Clipo	16/26/36	4–8 (12/20)		1000	Х	х			Х						Х	х	х
Hawa Frontal	25	4/6 (20/22)	2200	800	х			х							Х	Х	х
Hawa Regal A	25	4 (22)	2200	1200							Х				Х	Х	Х
Hawa Regal B	25	4–8	1800	1200	Х						Х				Х	Х	Х
Hawa Regal C	16/26	4–6.35 (12/20)	2000	1000	Х	х					х				Х	х	х

Index icons

Area of app	olication								
	On buildings		In buildings		On furniture				
Technical s	specifications								
	Weight	$\rightarrow \left[\right] \leftarrow$	Thickness	$\uparrow \llbracket$	Height	$\stackrel{\longleftarrow}{\longrightarrow}$	Width		
	Soft closing mechanism								
·m²	Max. area per door	→[Max. system width	∫m²	Max. area	$\not \vdash \rightarrow$	Max. opening width		
Design									
	IS Inslide		MS Mixslide		FS Forslide				
	IS Inslide Flush-fitting/ on one level		MS Mixslide Flush-fitting/ on one level		FS Forslide Flush-fitting/ on one level				
Installation									
	Fully opening	<u>}</u>	Half opening						
ū	Wall mounting		Ceiling mounting	口	Ceiling mounting recessed				
90	ol Top-running	-	ul Bottom-running						
Operation									
	Push		Pull						
Recommer	nded application Load Light load	උඋ	Load Medium load	උඋඋ	Load High load	\bigcap	Inland	4	Coastal area



Private access



Semi-public access



Public access



More than 20 ki



Less than 20 kr from the coast



Inspiring sliding solutions on furniture

Product overview and details



Inspiring sliding solutions on furniture

Hawa Concepta III

Hawa Folding Concepta III

Contents

8 **Solutions for wood applications**

154 Hawa Concepta III

156 Hawa Concepta III 25 Push

163 Hawa Concepta III 25 Pull

170 Hawa Concepta III 35 Push

177 Hawa Concepta III 35 Pull

184 Hawa Folding Concepta III

186 Hawa Folding Concepta III 20 Push

201 Hawa Folding Concepta III 20 Pull

216 Hawa Folding Concepta III 25 Push

231 Hawa Folding Concepta III 25 Pull



Wooden pivot and folding/sliding doors

Pivot and folding/sliding doors are the magicians among furniture doors. They make ush- tting wooden cabinet fronts disappear or reappear with a single movement, can be parked away in barely visible niches, and run into the cushioned end position independently. This opens up creative application options for doors and gateways: from the pop-up home of to the utility room in the bathroom and the kitchen in the living room.

Discover our tting solutions for wooden pivot and folding/sliding doors from Page 154





Hawa Concepta III for wooden pivot/slide-in doors Flowing transitions make rooms more exible than ever before

Hawa Concepta III supports the trend towards open living spaces, and creates transitions from kitcher to living room or from workplace to living area in a more uid way than ever before.

Doors of any size can be pivoted, slid in sideways and parked in an extremely small space, almost in the blink of an eye.

They can then be brought out again with a gentle tap and closed ush with the surface, so that all that remains visible of the kitchen is an aesthetic front. This works so easily and intuitively that it is even possib to dispense with handles.

We weren't just thinking about the users during the development of the Hawa Concepta III: The system impresses with its simplicity, even during installation and adjustment. This is all based on technology that is just as invisible as a kitchen that currently not in use.





Area of application

Cabinet constructions for multi-functional use of rooms which contain kitchens, home of ces max. washer/dryer combinations and storage space, which are freely accessible and disappear behind the cabinet front with pivot / slide-in hardware if required.

Technical specifications

max. 25/35 kg

1200-2700 mm

440-750 mm→ 18-26 mm

System advantages

Flexibility Variable door dimensions: half-height to floor-to-ceiling solutions

possible, including walk-on solutions

Productivity Easy installation thanks to high degr of pre-assembly Intuitive adjustment with easily accessible adjustment points

Comfort Ergonomic movement support for even, smooth movement

Opening and closing with very little effort - one hand is enough

Aesthetics Uniform, flush front design with even gap pattern

Allows constructions with and without a handle - the technology


remainsinvisible

Good to know (accessories)


- Connector makes overlaid fumiture structures possible
- Straightening tting for doors

Installation examples


Hawa Concepta III 25/35 Push




Hawa Concepta III 25/35 Pull



Hawa Concepta 25/35 Push




Door striking against the top and bottom cabinet sections



Composed cabinet overlay doors



Overlay door without base



Fitting for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

Productivity Easy installation thanks to high degree of

pre-assembly with intuitive adjustment

Comfort Ergonomic movement support for even,

smooth movement

Aesthetics Cabinet designs without handle -

the technology remains invisible

Technical specifications

6-25 kg (13 to 55 lbs.)

1200-2200 mm (3' 11 1/4" to 7' 2 5/8")


←→ 440-750 mm (1' 5 5/16" to 2' 5 17/32")

→[- 18-26 mm (23/32" to 1 1/32")



Installation examples

Door striking against the top and bottom cabinet sections

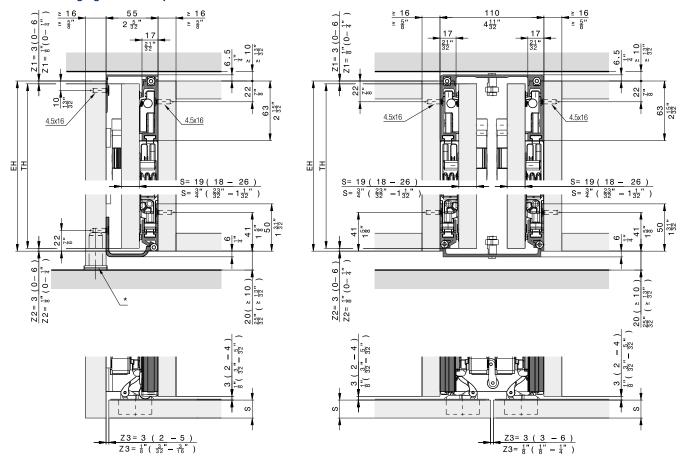

^{*} Recommendation: Use adjustable foot

Components required for one cabinet





Hawa Concepta III 25 Push, left

	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200-2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Push, slide-in set, le	ft 30998
Upright profile, for door height 1200-2200 m (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	m 30778

Hawa Concepta III 25 Push, right

	No.
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200-2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Push, slide-in set, ri	ght 30999
Upright profile, for door height 1200-2200 m (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	m 30778

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

	Door width in mm											
		440	500	550	600	0 65	0 7	00	750			
	2200	25	25	25	25	2	5 2	5	24			
	2150	25	25	25	25	25	5 2	5 :	23			
	2100	25	25	25	25	25	5 2	4 :	23			
	2050	25	25	25	25	2	5 2	4	22			
	2000	25	25	25	25	2	5 2	3	21			
	1950	25	25	25	25	24	1 2	2 2	21			
	1900	25	25	25	25	23	3 2	1 2	0 0			
_	1850	25	25	25	24	22	2 2	1 1	19.⊑			
П	1800	25	25	25	23	21	20	0 1	hts			
Door hight mm	1750	25	25	25	22	21	19	7 1	Maximum weights			
or h	1700	25	25	24	22	20) 1	9 1	Þέ			
Do	1650	25	25	23	21	19	18	3 1	<u>¥</u>			
	1600	25	24	22	20	18	17	7 1	δŽ			
	1550	25	23	21	19	18	16	1	5			
	1500	24	22	20	18	17	16) 1	5			
	1450	23	21	19	17	16	15	14	4			
	1400	22	20	18	17	15	14	1	3			
	1350	21	19	17	16	15	14	13	3			
	1300	20	18	16	15	14	13	1:	2			
	1250	19	17	15	14	13	12	11				
	1200	18	16	15	13	12	11	11				

				Door wid	dth in inch	1			
		1' 55/, "	1' 7 ¹¹ / ₁₆ "	1' 9 ²¹ / ₃₂ "	1' 11 ⁵ / ₈ "	2' 119/32"	2' 39/, "	2' 5 ¹⁷ / ₃₂ "	
	7' 25/8"	55	55	55	55	55	55	53	
	7' 21/32"	55	55	55	55	55	55	51	
	6' 10 ¹¹ / ₁₆ "	55	55	55	55	55	53	51	
	6' 8 ²³ / ₃₂ "	55	55	55	55	55	53	49	
	6' 63/,"	55	55	55	55	55	51	46	
	6' 4 ²⁵ / ₃₂ "	55	55	55	55	53	49	46	
	6' 2 ¹³ / ₁₆ "	55	55	55	55	51	46	44	s.
5	6' 27/, "	55	55	55	53	49	46	42	Maximum weights in lbs.
Ē	5' 10 ⁷ / ₈ "	55	55	55	51	46	44	42	hts
Door hight in inch	5' 8 ²⁹ / ₃₂ "	55	55	55	49	46	42	40	veig
'n	5' 6 ¹⁵ / ₁₆ "	55	55	53	49	44	42	37	<u>-</u> ع ا
Dool	5' 4 ³¹ / ₃₂ "	55	55	51	46	42	40	37	ķ
	5' 3"	55	53	49	44	40	37	35	Ма
	5' 1 ¹ / ₃₂ "	55	51	46	42	40	35	33	
	4' 11 ¹ / ₁₆ "	53	49	44	40	37	35	33	
	4' 93/32"	51	46	42	37	35	33	31	
	4' 7 ¹ / ₈ "	49	44	40	37	33	31	29	
	4' 5 ⁵ / ₃₂ "	46	42	37	35	33	31	29	
	4' 3 ³ / ₁₆ "	44	40	35	33	31	29	26	
	4' 1 ⁷ / ₃₂ "	42	37	33	31	29	26	24	
	3' 11 ¹ / ₄ "	40	35	33	29	26	24	24	

Door wight in kg

Door wight in lbs.

Hawa Configurator www.hawa.com/configurator →