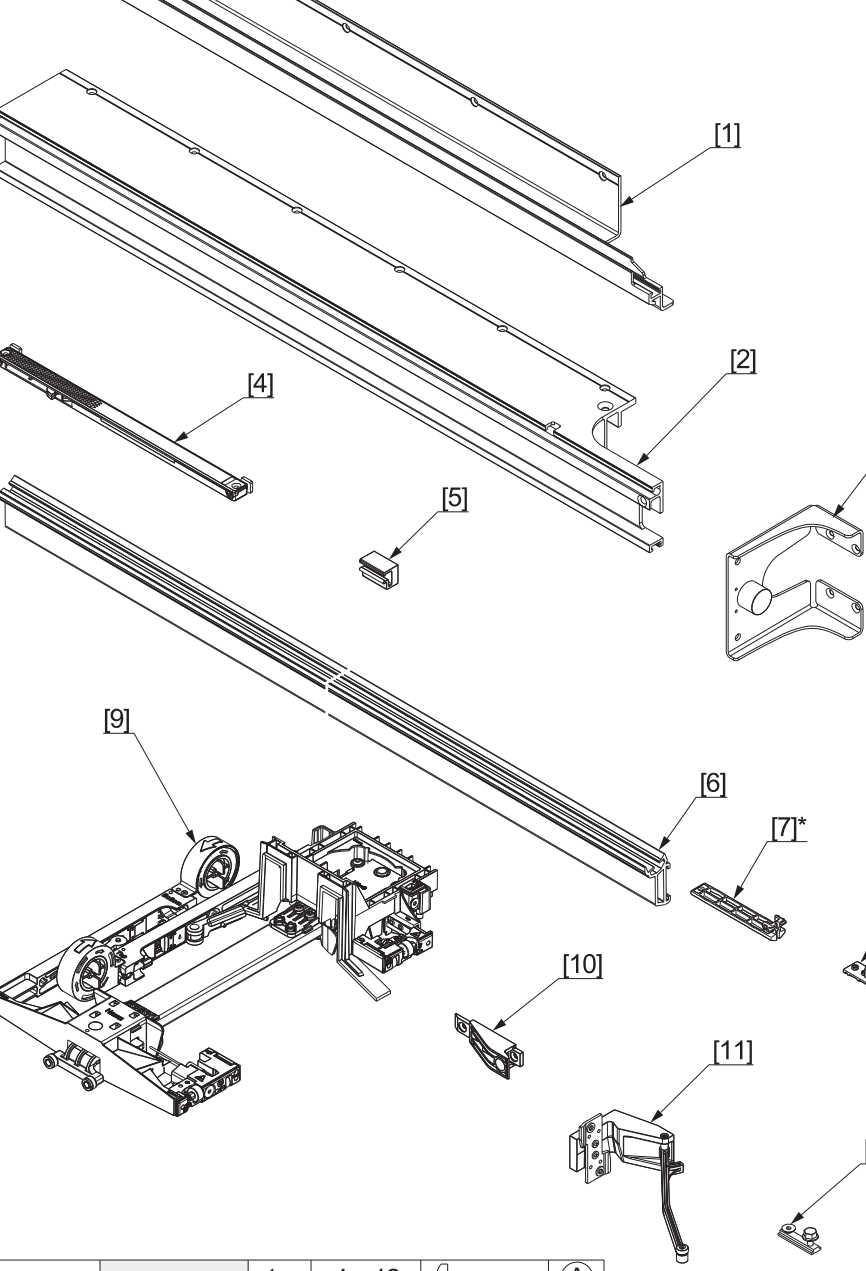
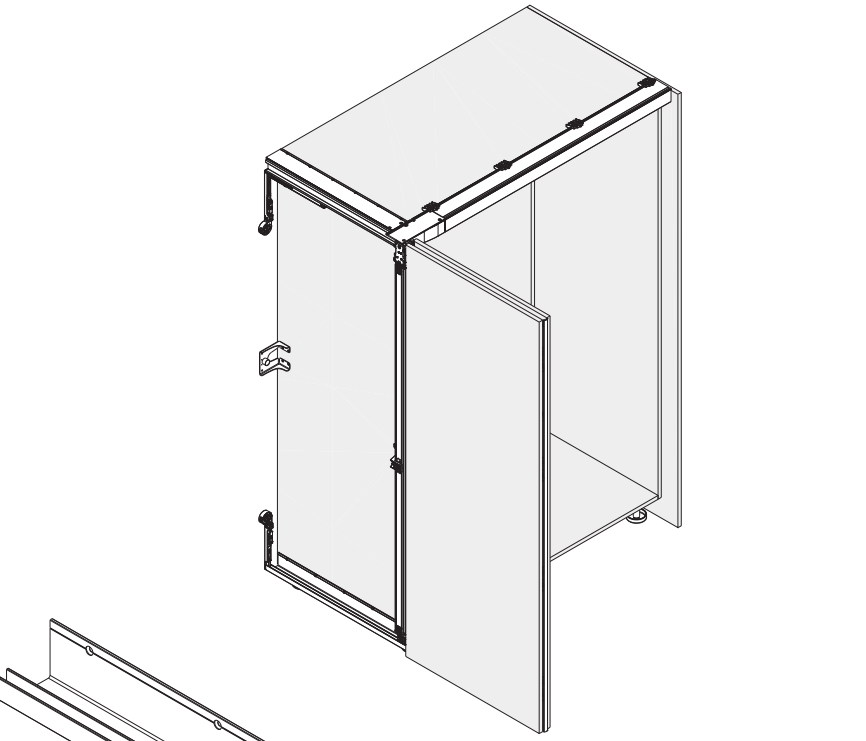
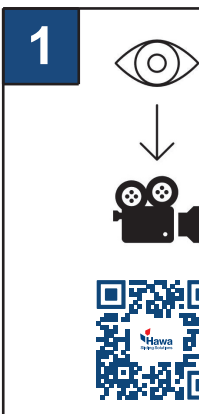















Folding Concepta3
PULL 20/25 Kg

DE **Montageanleitung** Pull, Anlage links
FR **Instructions de montage** Pull, Installation à gauche
EN **Installation instructions** Pull, left-hand system
IT **Istruzioni di montaggio** Pull, Installazione a sinistra
ES **Instrucciones de montaje** Pull, Instalación a izquierda



520068 V01 (01/18/20) 04.2024, L © 2024 Hawa Sliding Solutions AG

31530		1 x	4 x 12		(A)
		6 x	4.5 x 30		(B)
31529		28 x			
31585	✓	16 x			
31587	✓	24 x			
2 x 31585	✓	32 x			
31532		20 kg (44 lbs.)	20 x		
31533		25 kg (55 lbs.)	26 x		

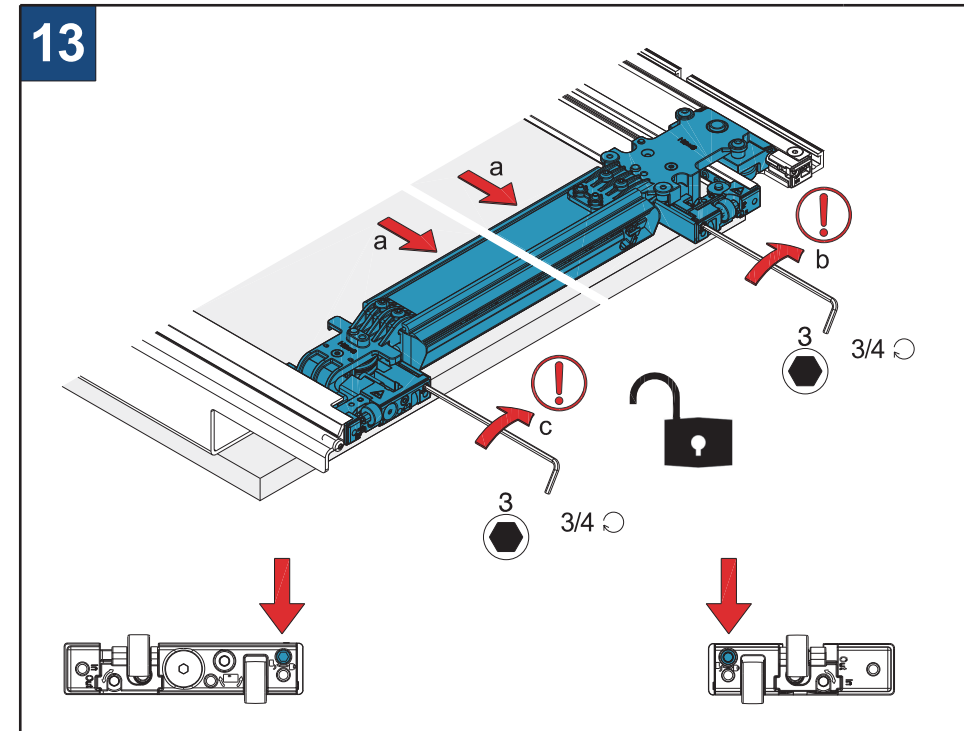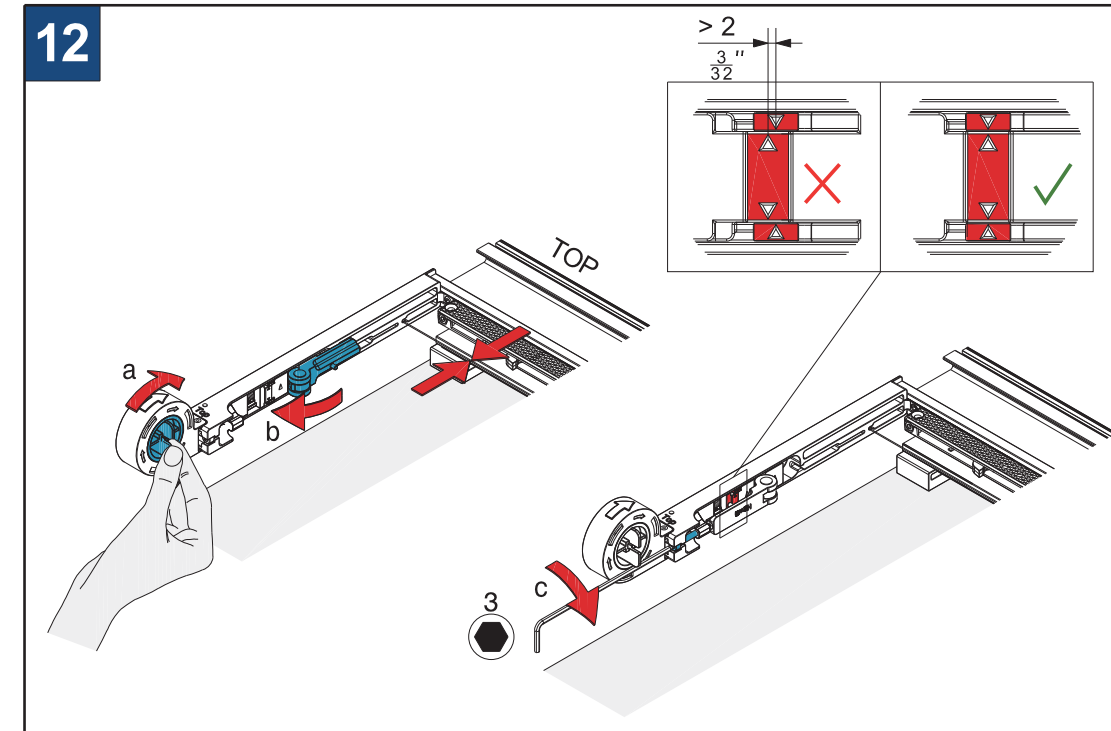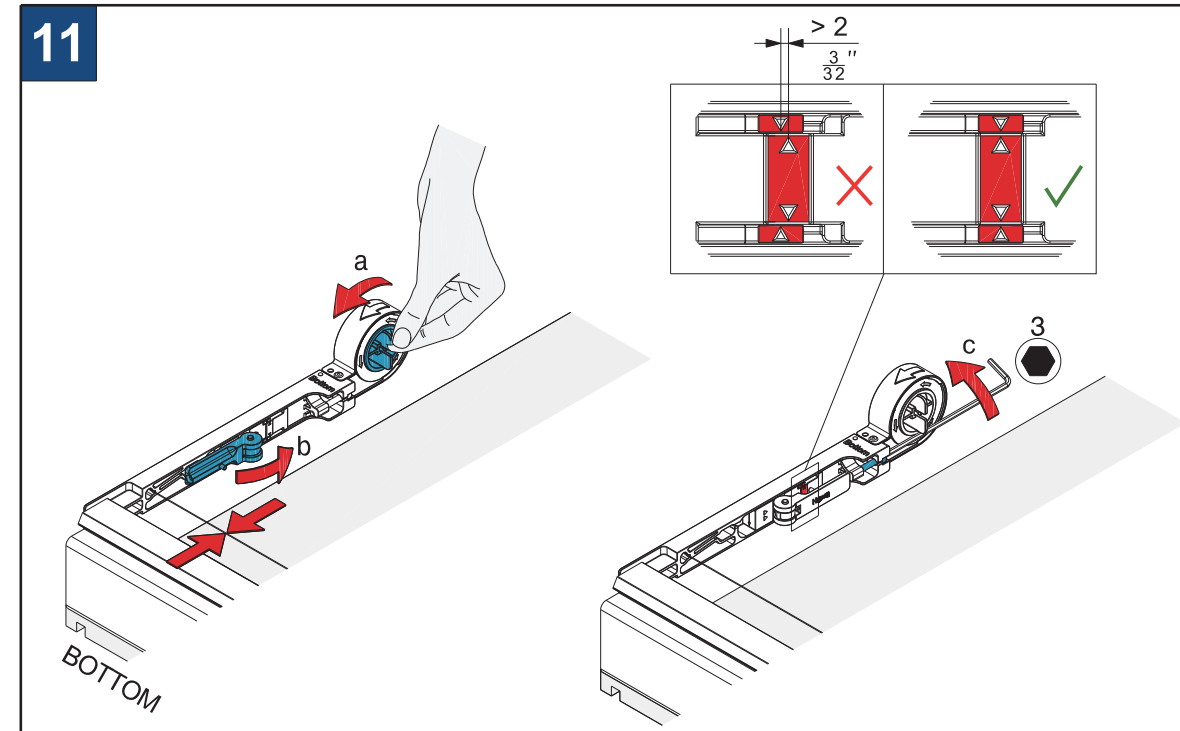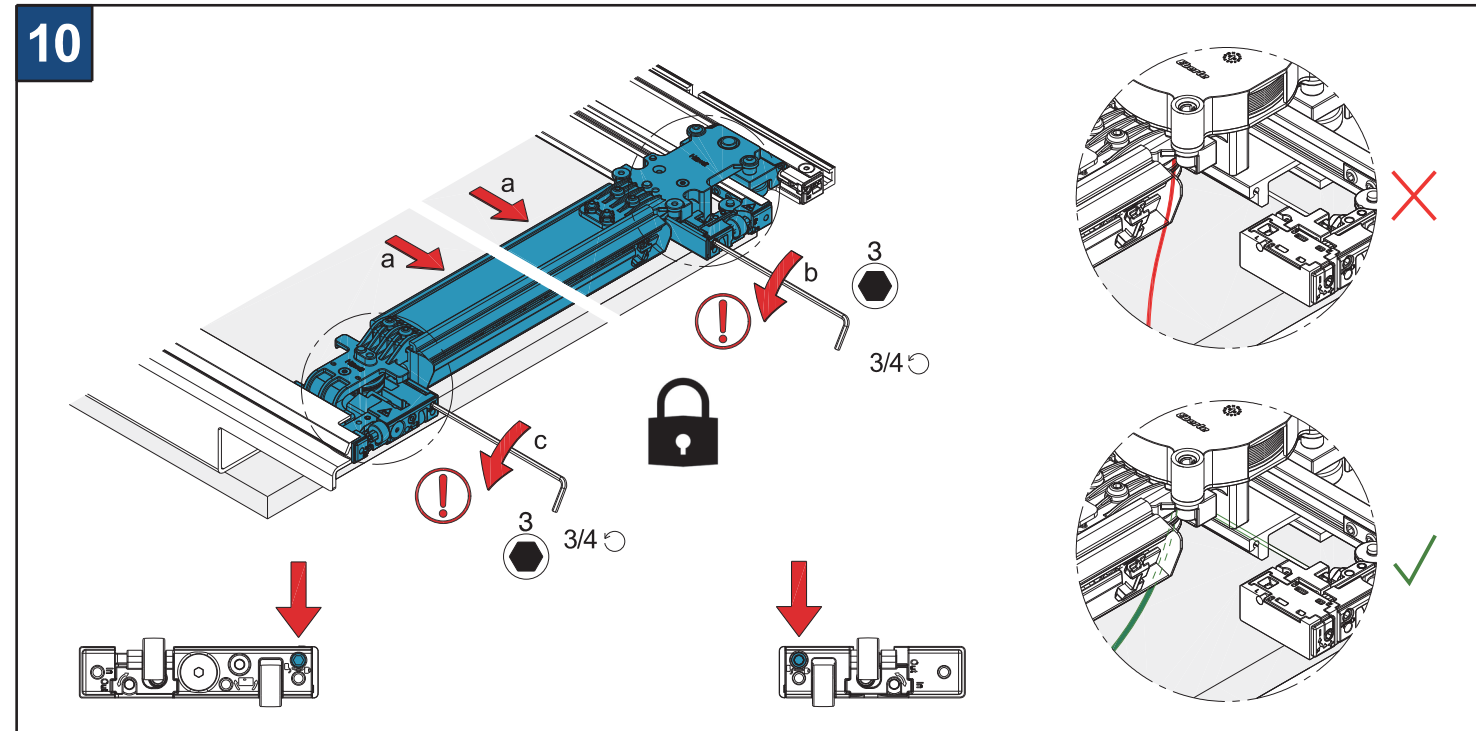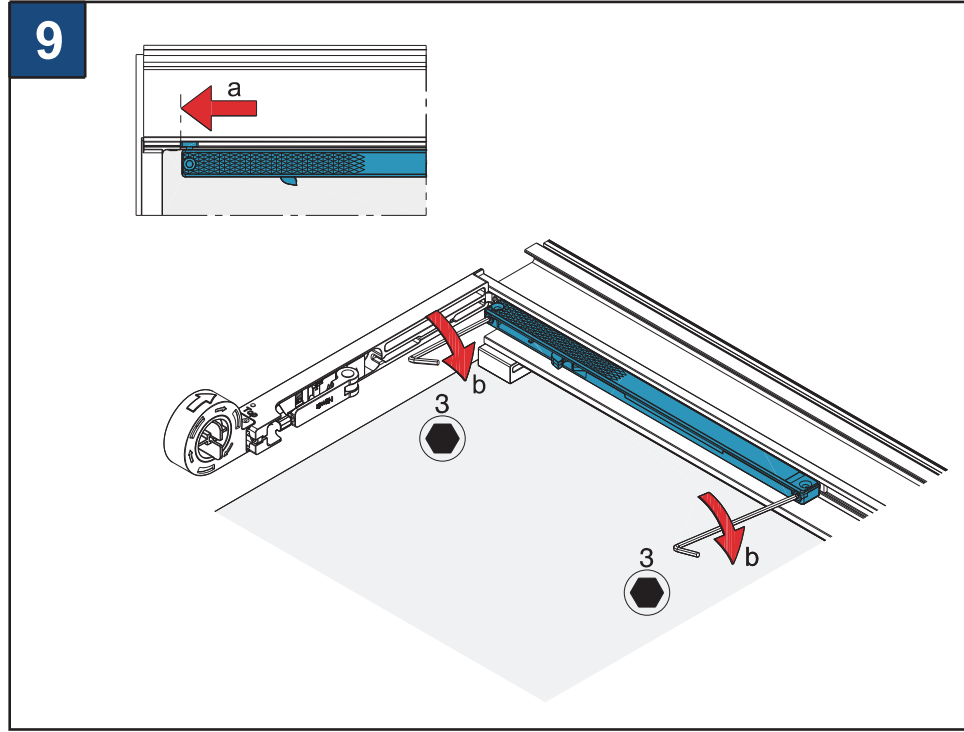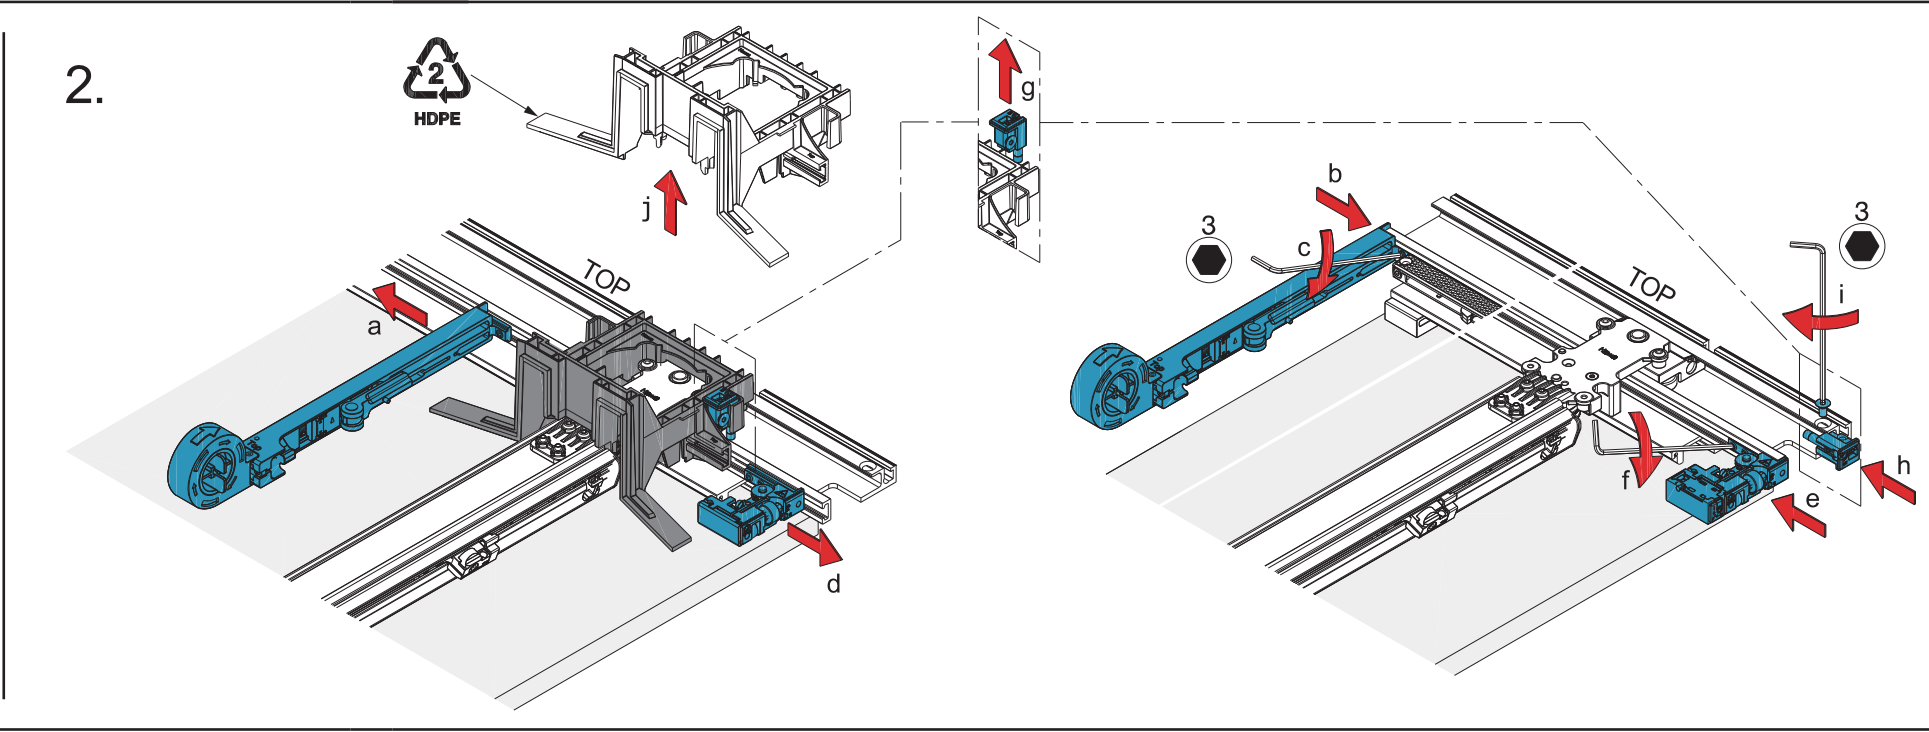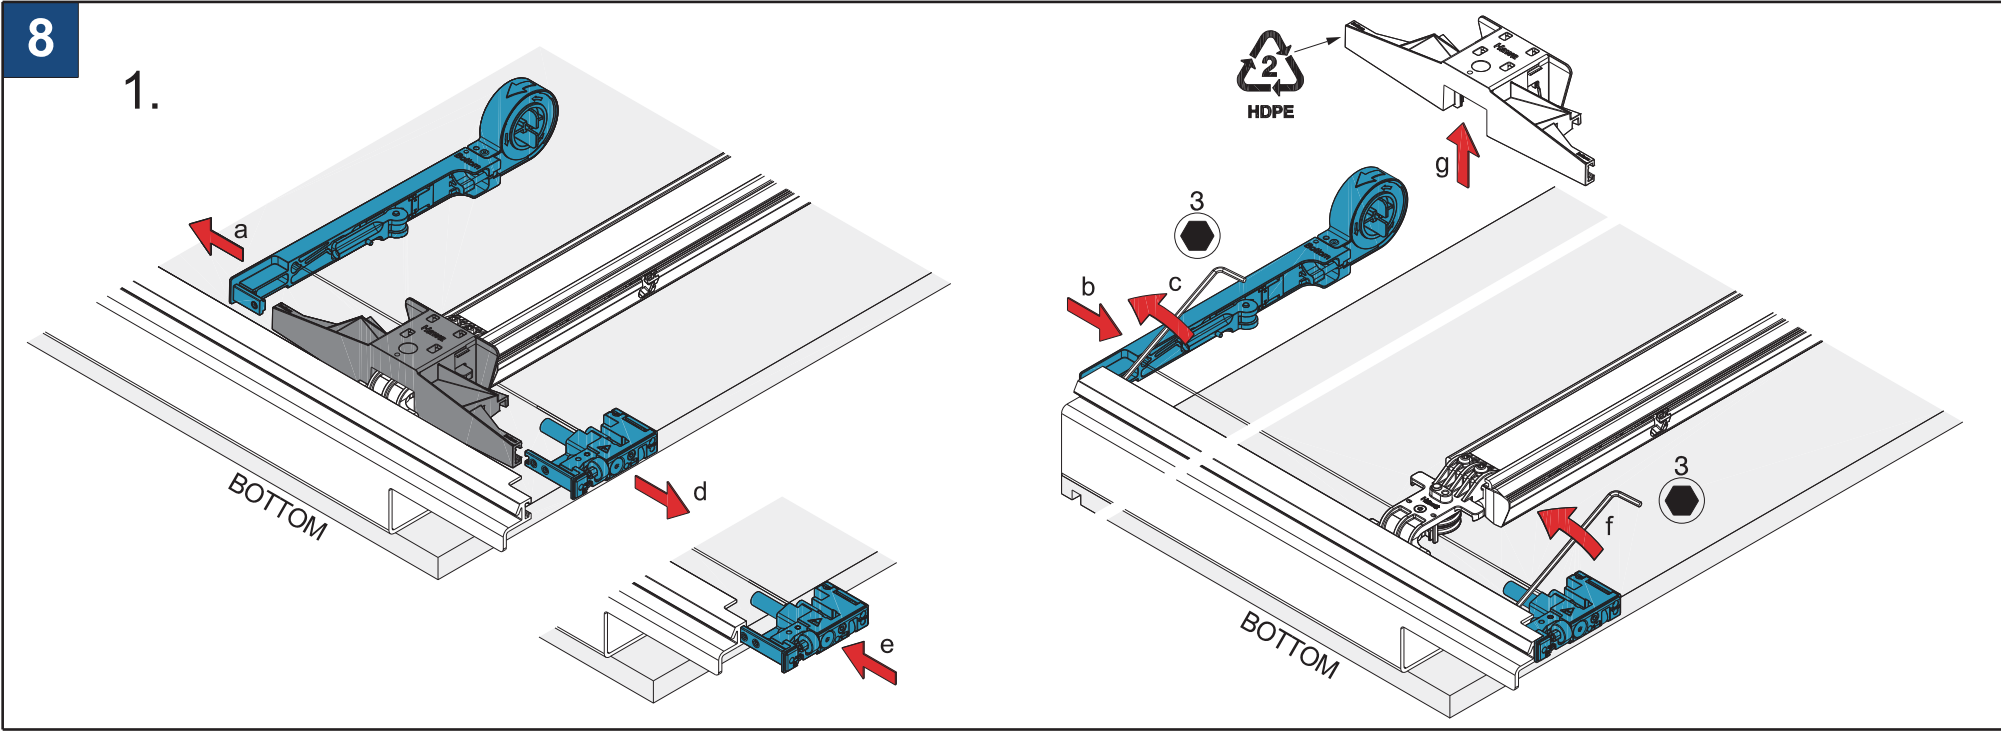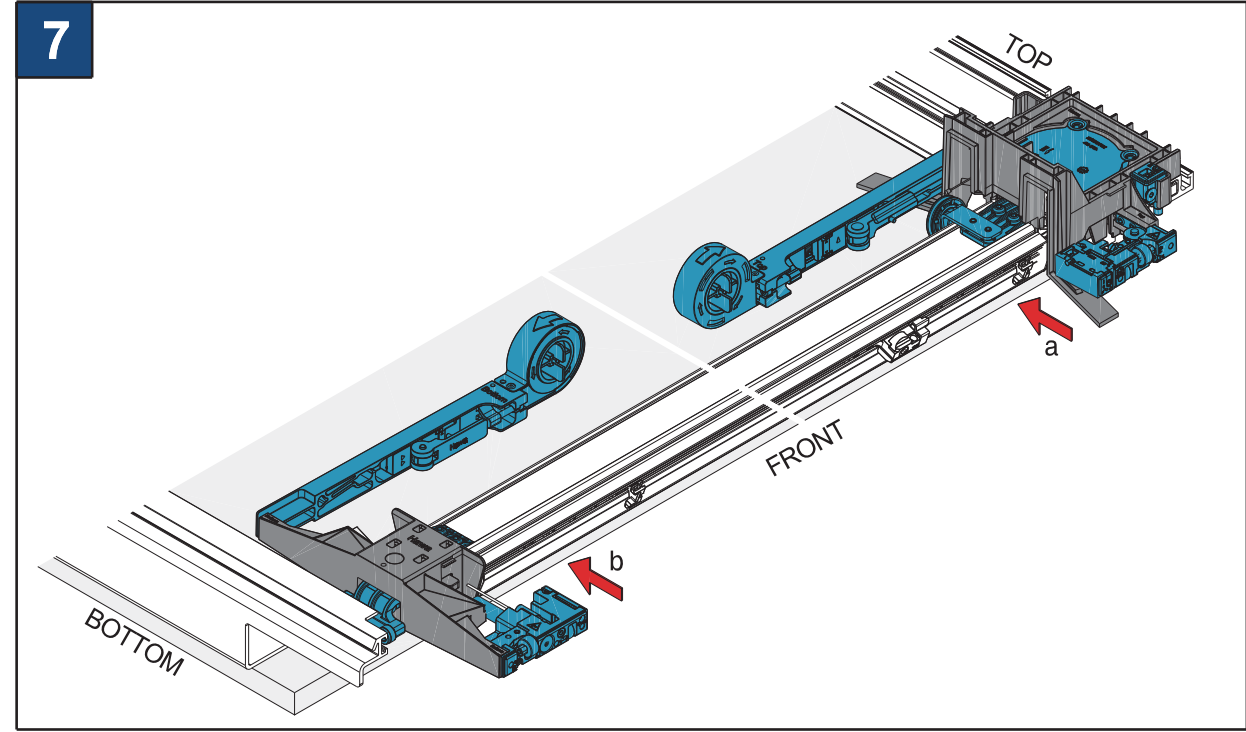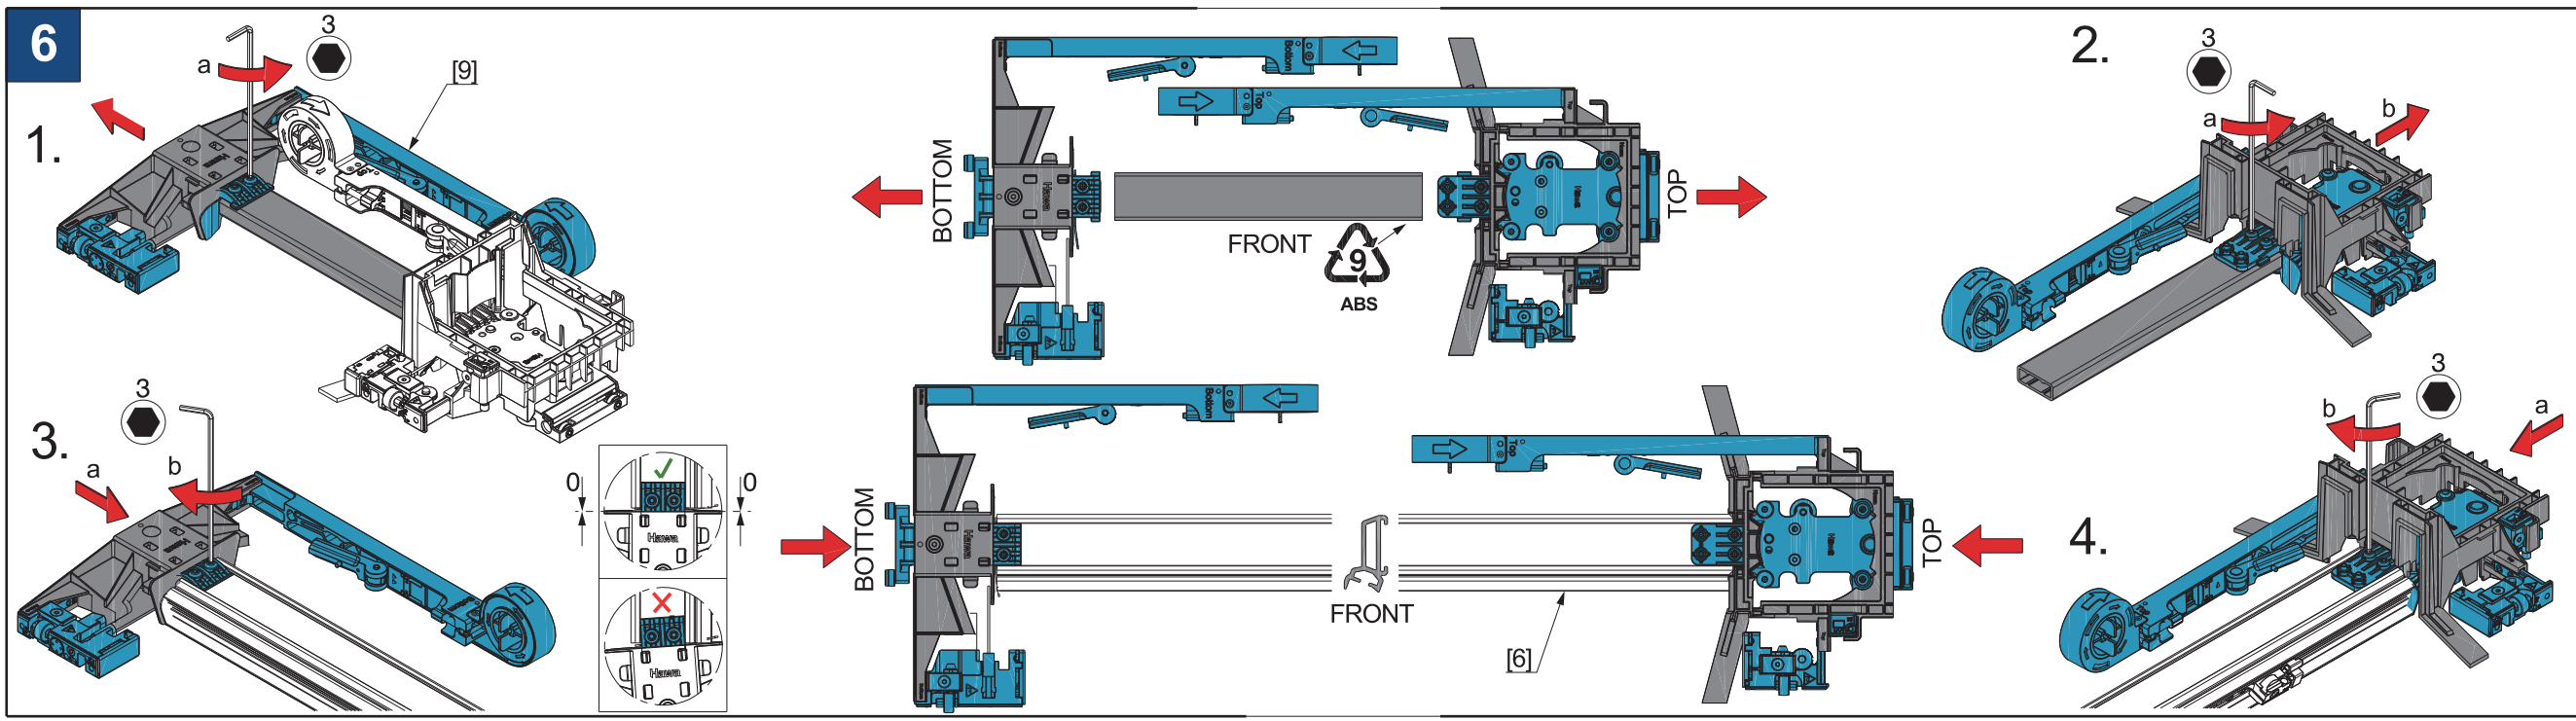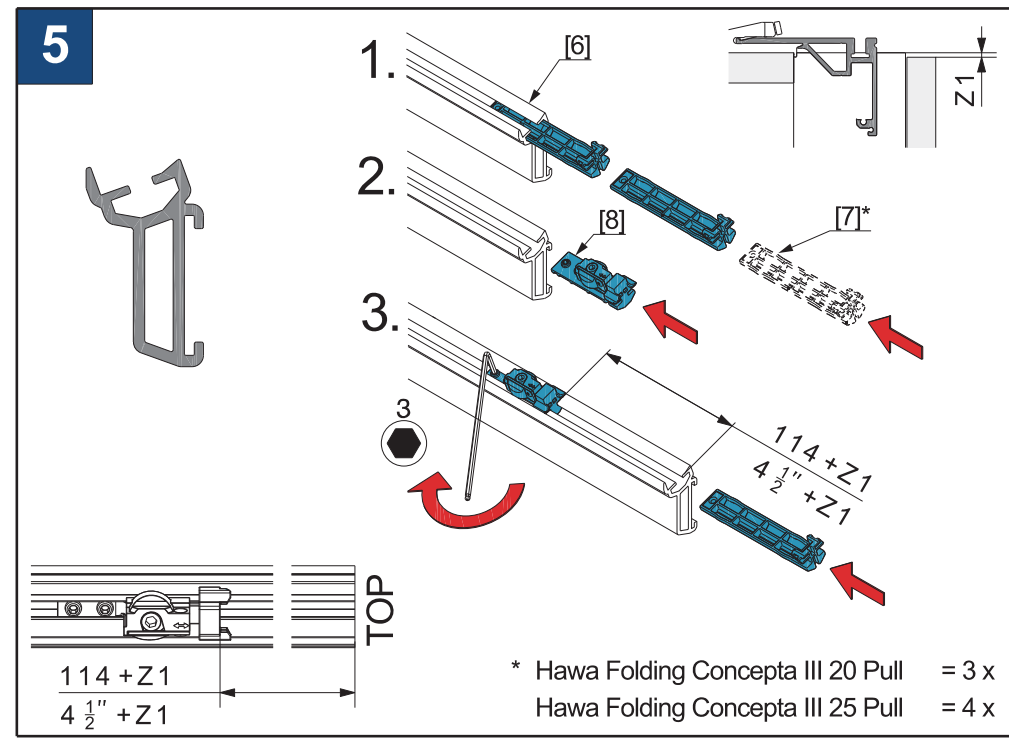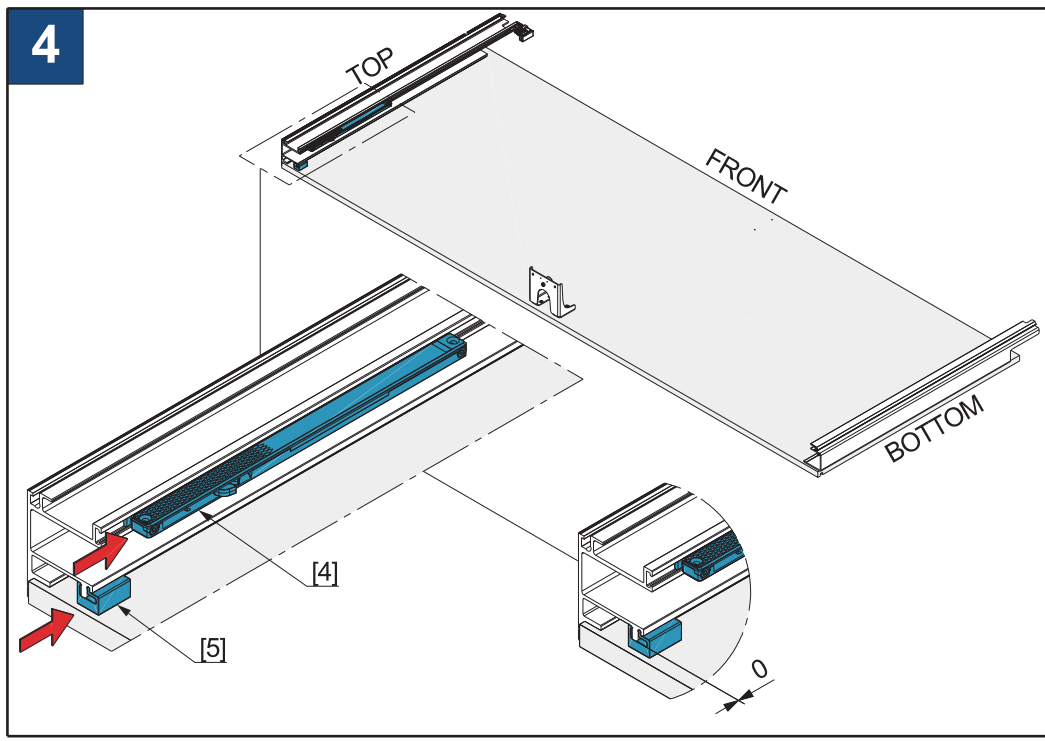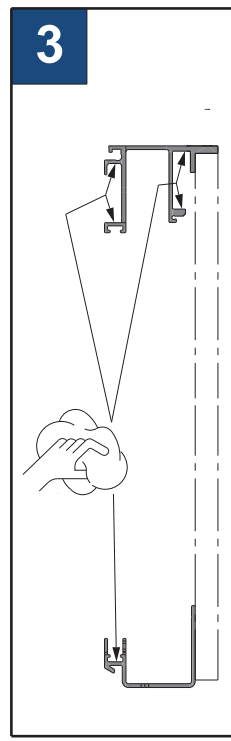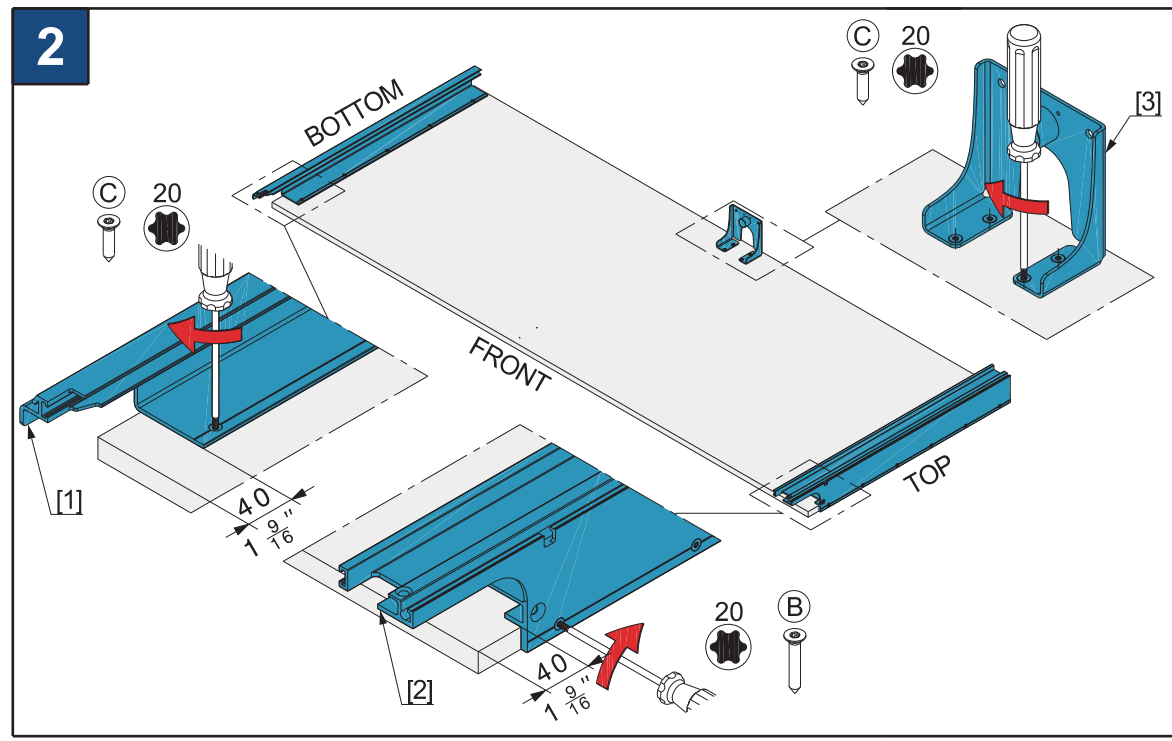

Hawa Folding Concepta III 20/25 Pull

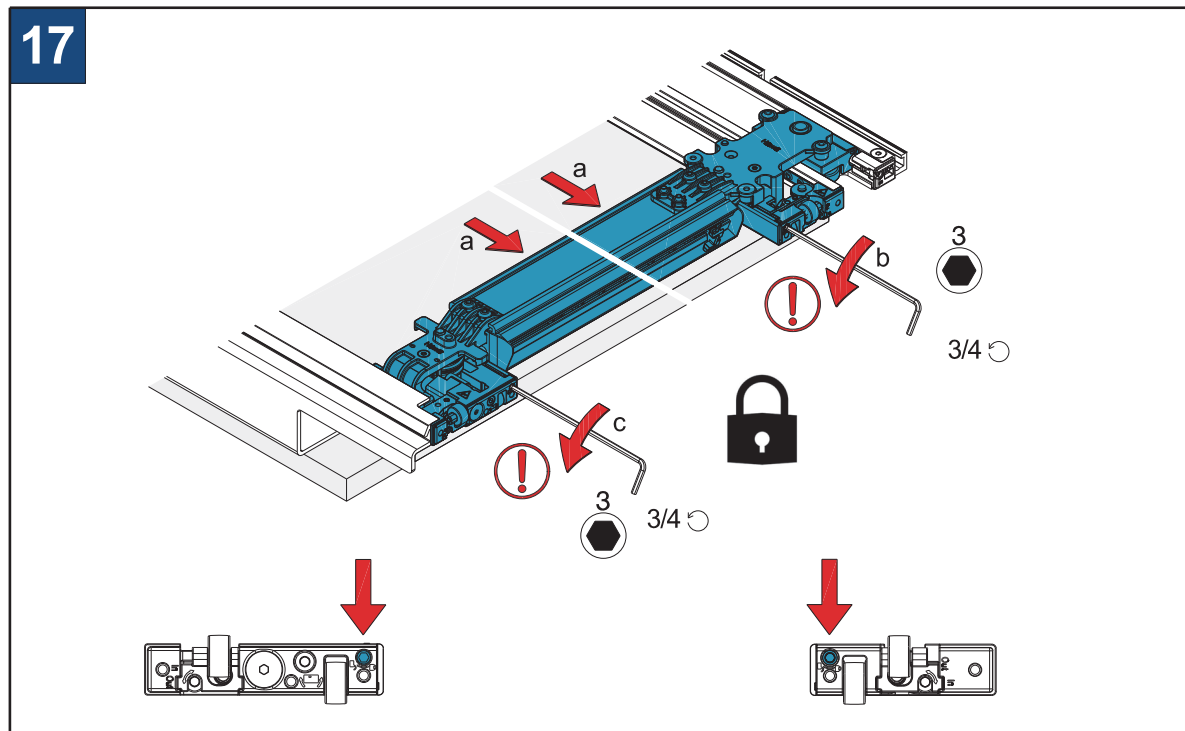
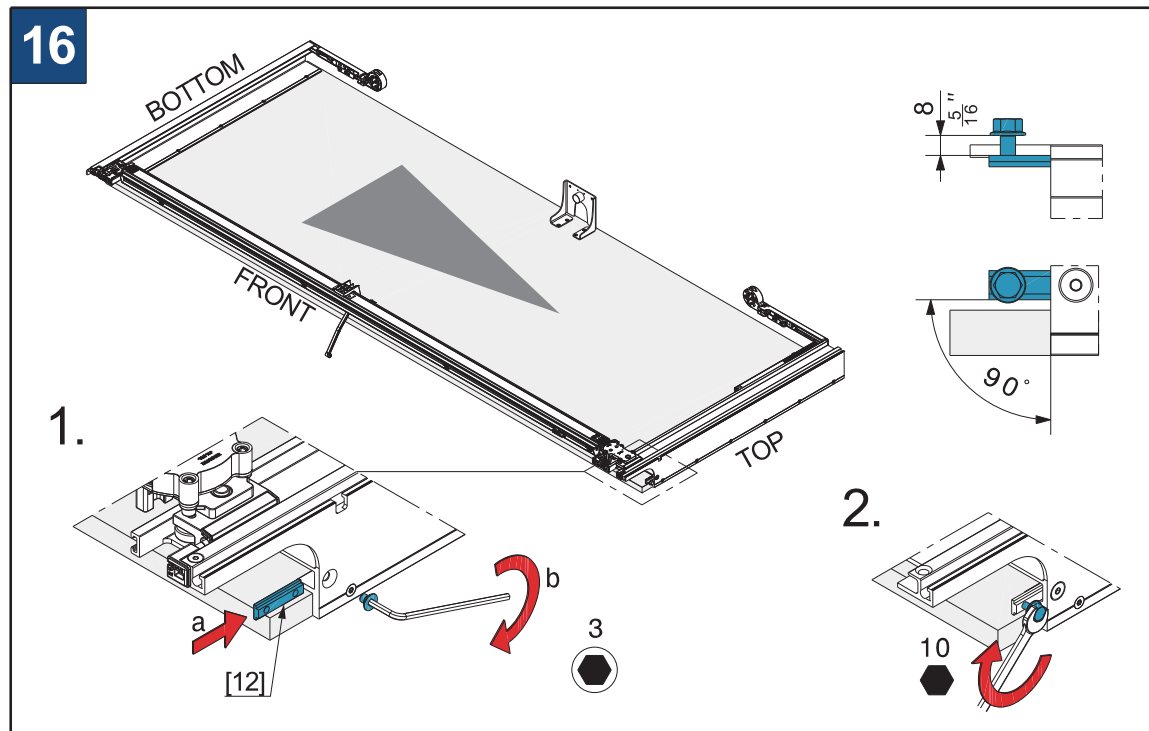
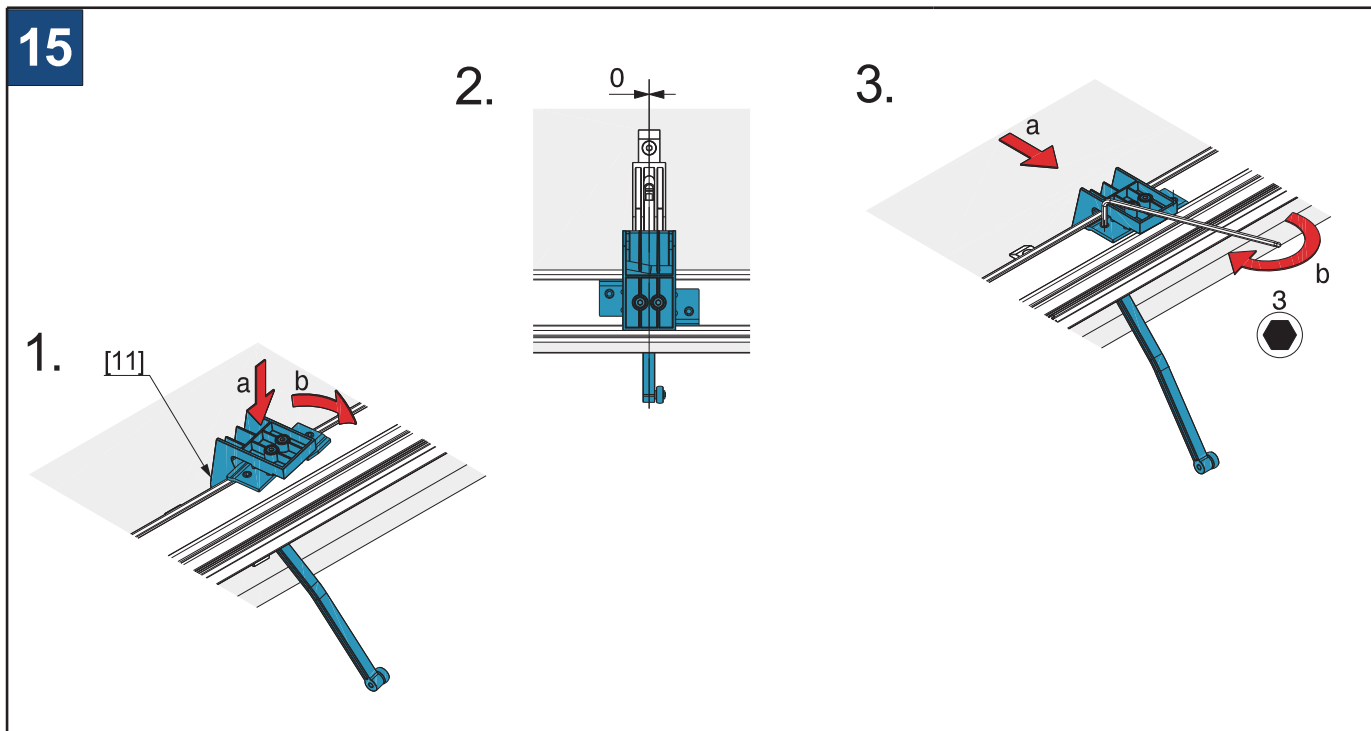
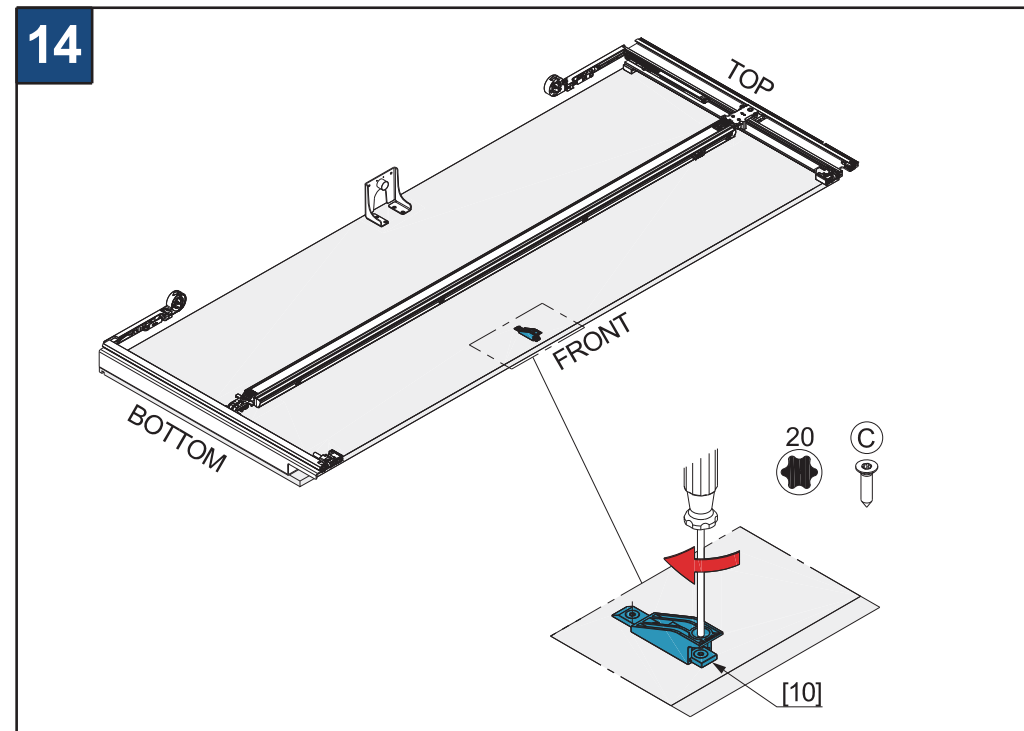
DE Die Dokumente "Produktinformation" (52067) und «Sicherheitshinweise» (22991) sind Bestandteile dieser Montageanleitung.
Es gelten metrische Abmessungen – Zollangaben sind nur zur Information.
Anleitungen aufbewahren, Ersatz unter www.hawa.com.

FR Les documents "Information produit" (52067) et "Consignes de sécurité" (22991) font partie intégrante de ces instructions de montage.
Les dimensions métriques s'appliquent – les spécifications en pouces ne sont données qu'à titre indicatif.
Conserver les instructions, remplacement sur www.hawa.com.

EN The documents "Product information" (52067) and "Safety instructions" (22991) are part of these installation instructions.
Metric measurements apply – those in inches are for information only.
Retain the instructions. Replacements available from www.hawa.com.

IT I documenti "Informazioni sul prodotto" (52067) e "Istruzioni di sicurezza" (22991) fanno parte di queste istruzioni di installazione.
Valgono le dimensioni metriche – i dati imperiali sono forniti solo a titolo informativo.
Conservare le istruzioni. In caso di perdita, possono essere scaricate in www.hawa.com.

ES Los documentos "Información sobre el producto" (52067) e "Instrucciones de seguridad" (22991) forman parte de estas instrucciones de Montaje.
Las dimensiones corresponden al sistema métrico – las medidas en pulgadas se indican solo a título informativo.
Conserve estas instrucciones. Si necesita reponerlas, visite www.hawa.com.




Hawa Folding Concepta III 20/25 Pull

DE Montage am Bau und Justieranleitung Anlage links
FR Montage sur site et instructions de réglage Installation à gauche
EN Installation on buildings and adjustment instructions left-hand system
IT Montaggio sull'edificio e istruzioni per la regolazione Installazione a sinistra
ES Instrucciones de montaje y ajuste en el lugar de instalación Instalación a izquierda



Folding Concepta3
PULL 20/25 Kg
Adjustment

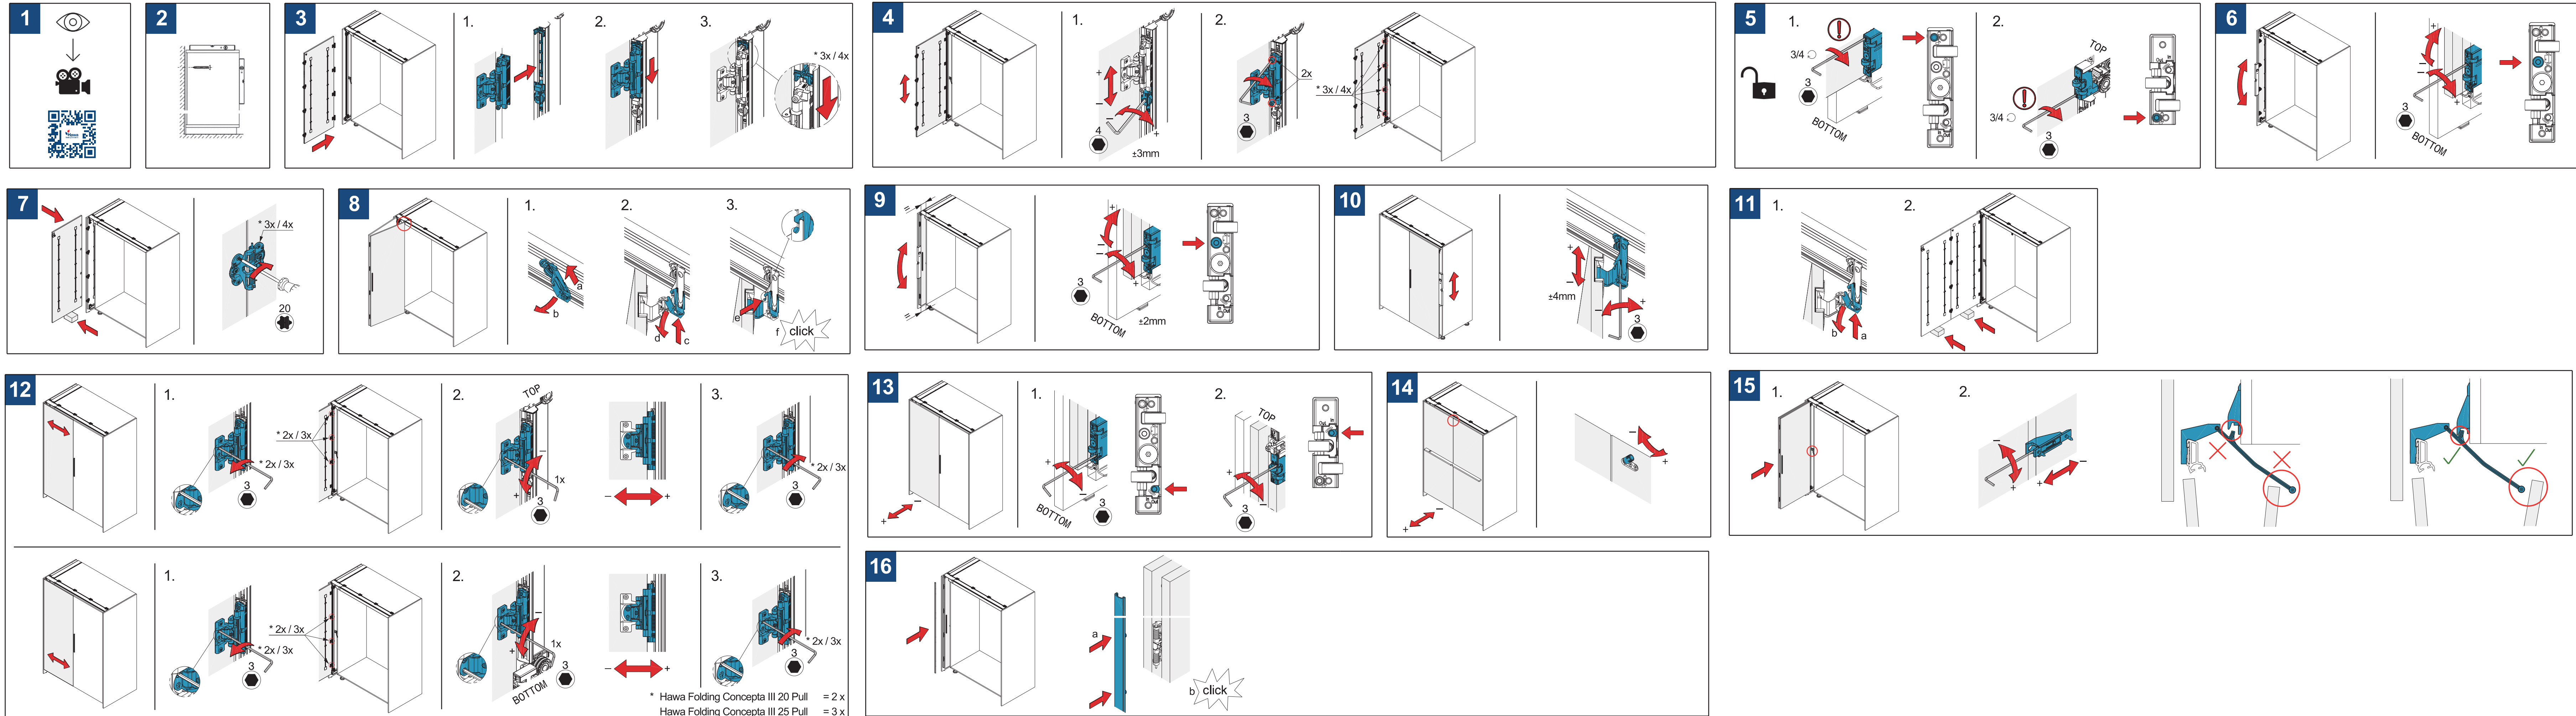* Hawa Folding Concepta III 20 Pull = 3 x
Hawa Folding Concepta III 25 Pull = 4 x





















Folding Concepta3 Push 20/25 Kg

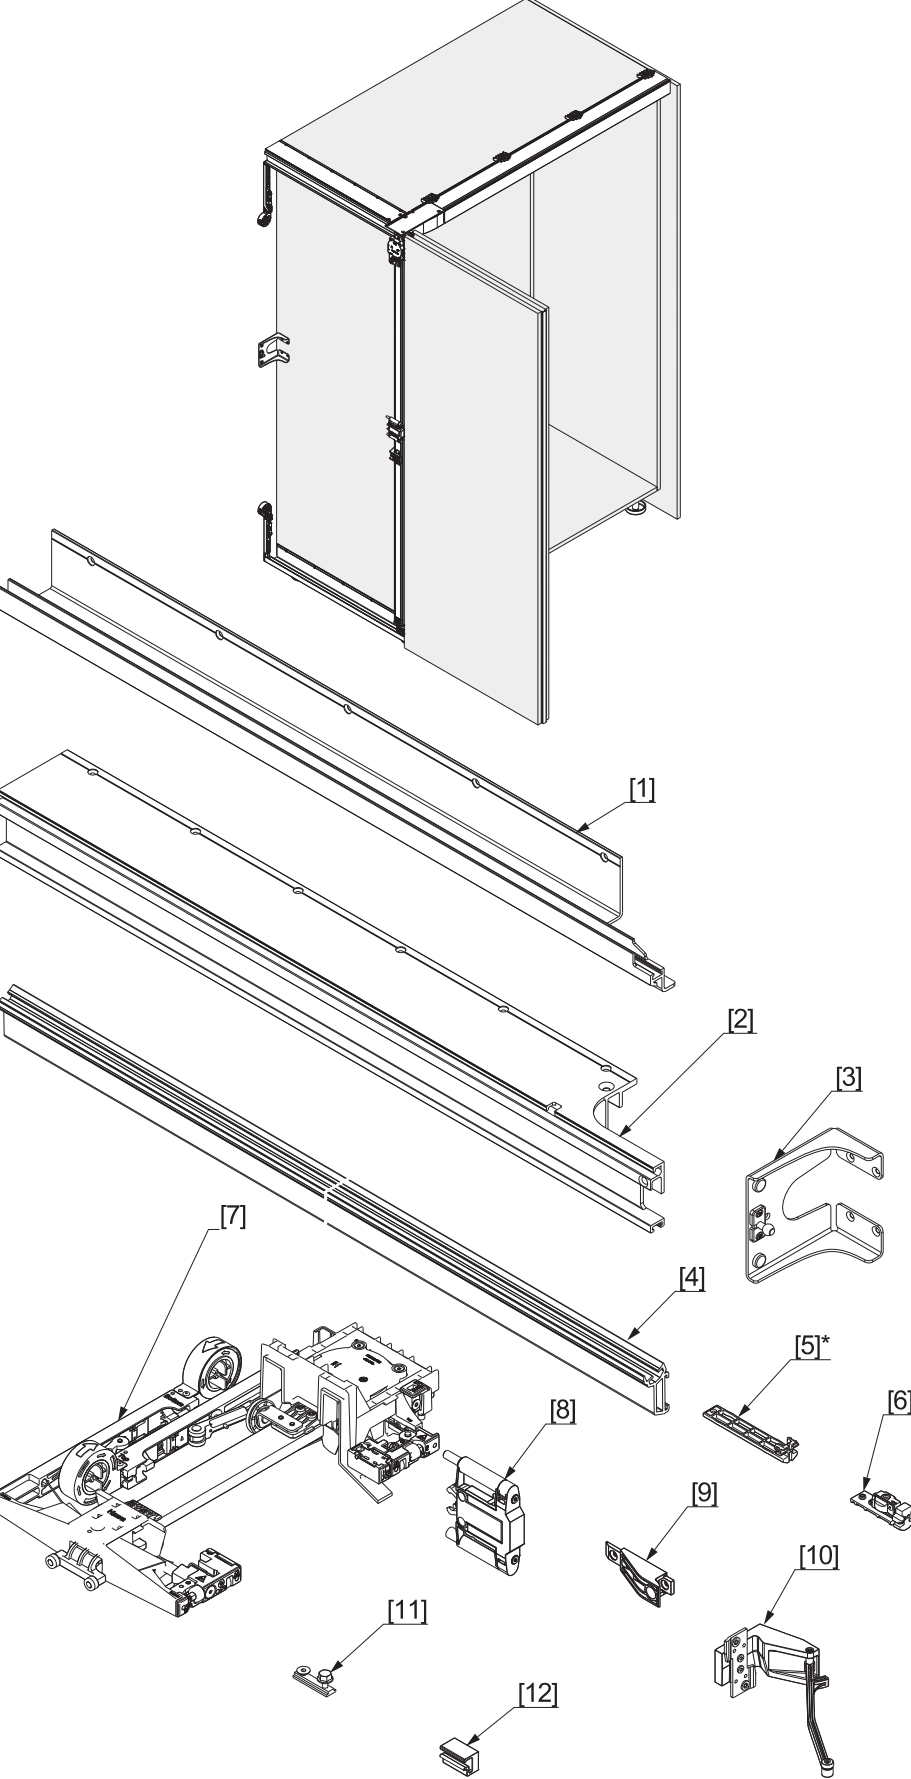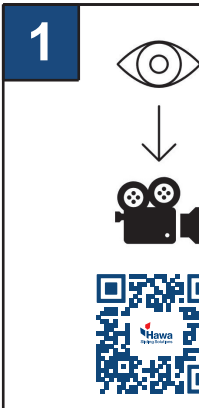DE **Montageanleitung**, Push, Anlage links
FR **Instructions de montage**, Push, Installation à gauche
EN **Installation instructions**, Push, left-hand system
IT **Istruzioni di montaggio**, Push, Installazione a sinistra
ES **Instrucciones de montaje**, Push, Instalación a izquierda



DE Montageanleitung	1 x	4 x 12		(A)
FR Instructions de montage	6 x	4,5 x 30		(B)
EN Installation instructions	28 x			
IT Istruzioni di montaggio	16 x			
ES Instrucciones de montaje	24 x	4,5 x 16		(C)
	32 x			
	2 x 31585			
	20 kg (44 lbs.)	20 x		
	31532	4 x 16		(D)
	31533	26 x		
	2 x	4 x 16		(E) 1 x
				(F) 1 x

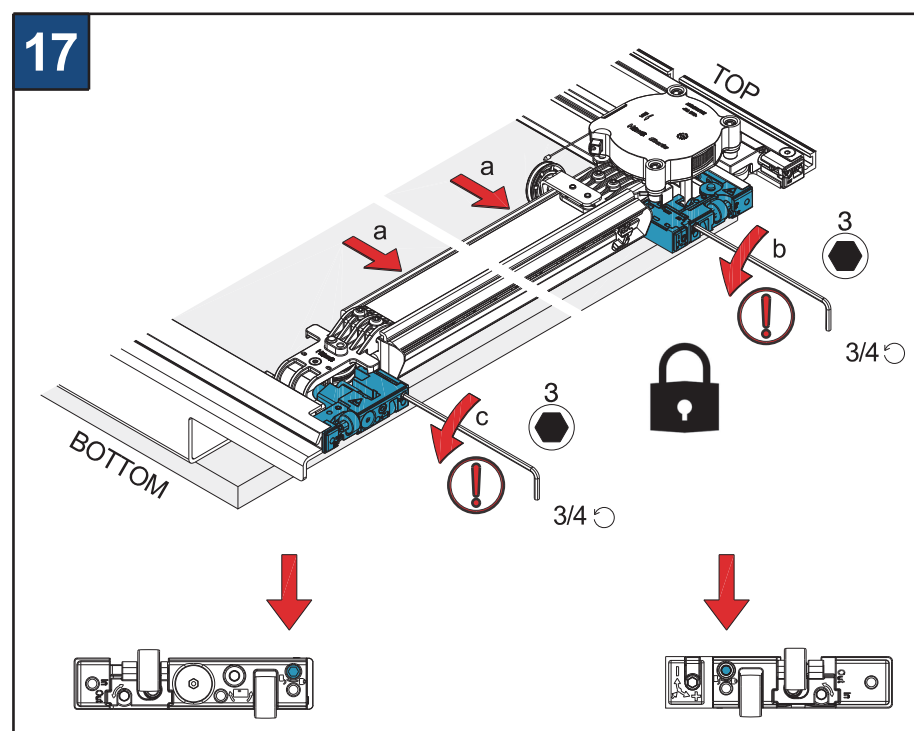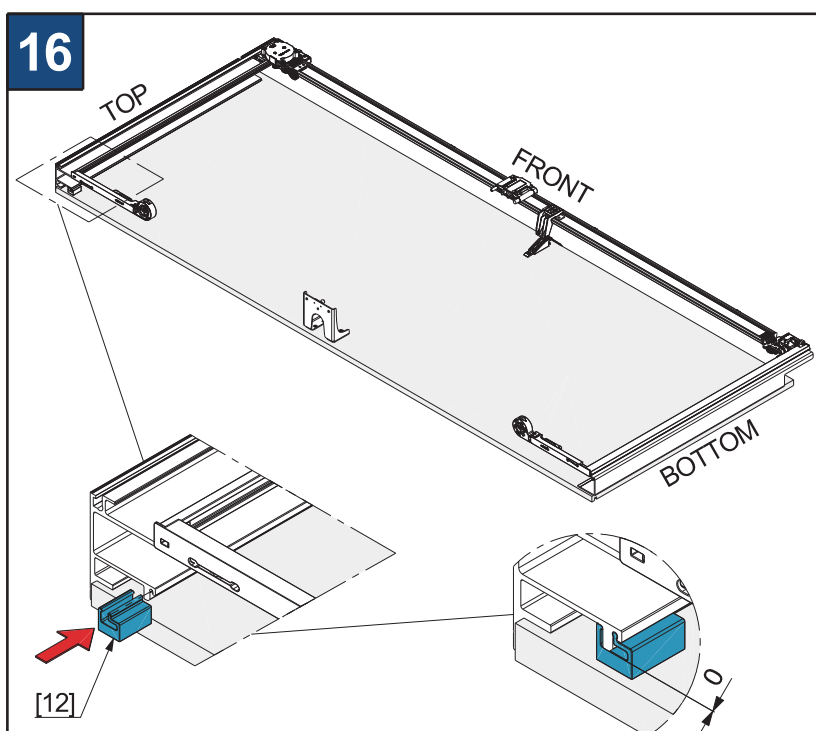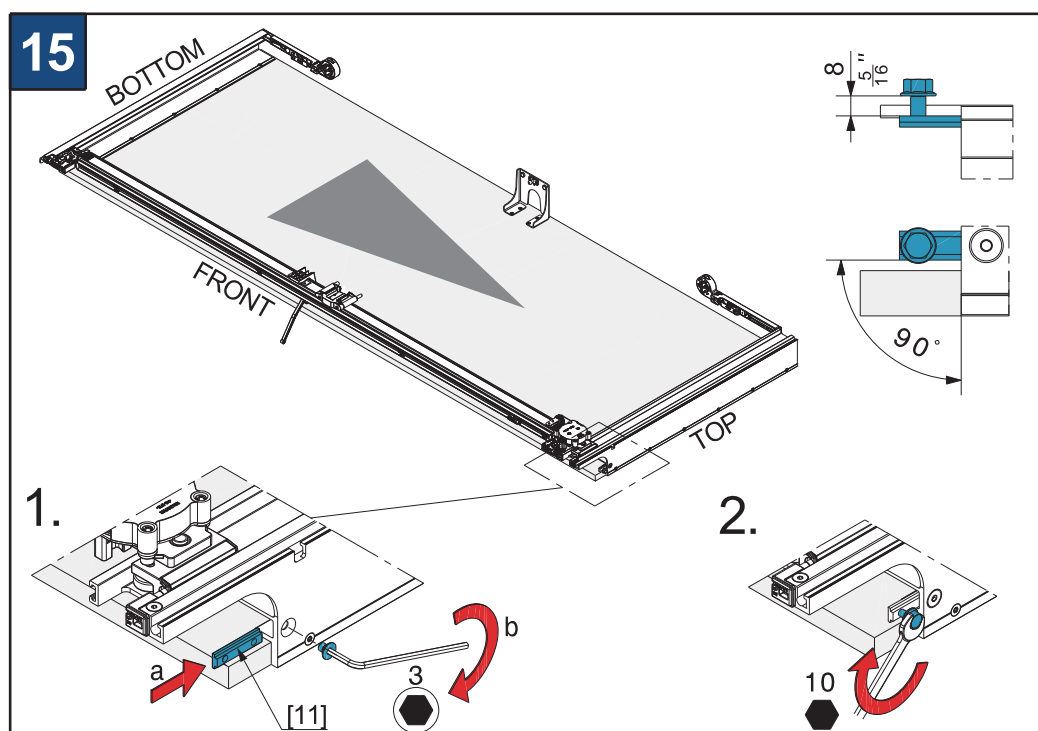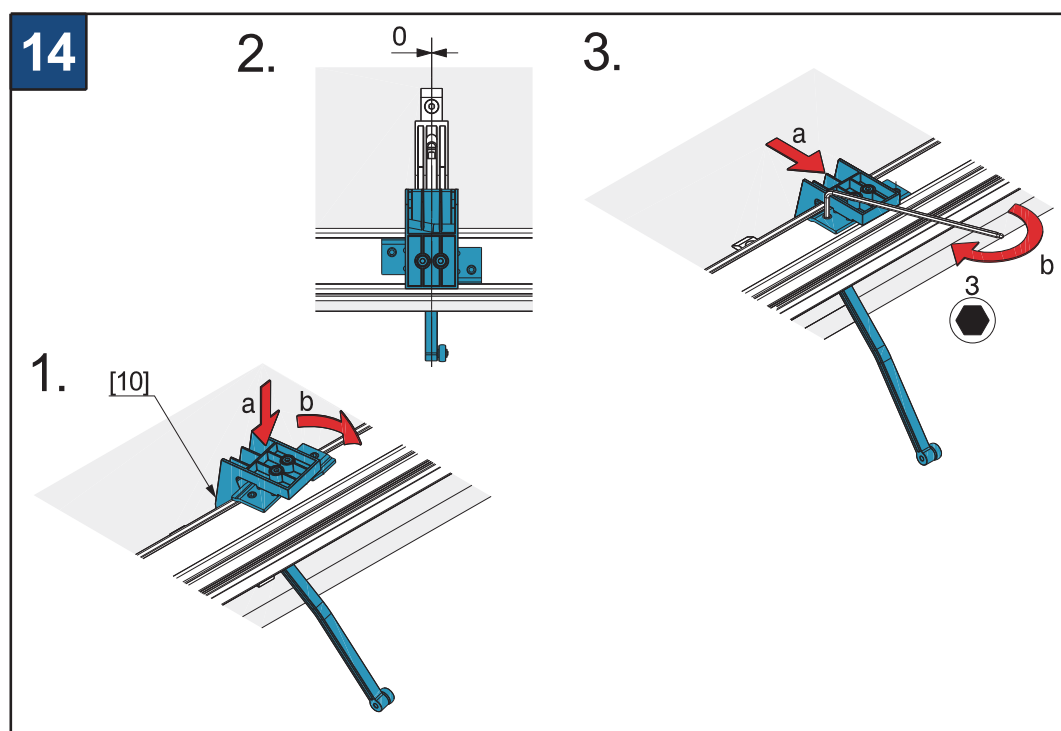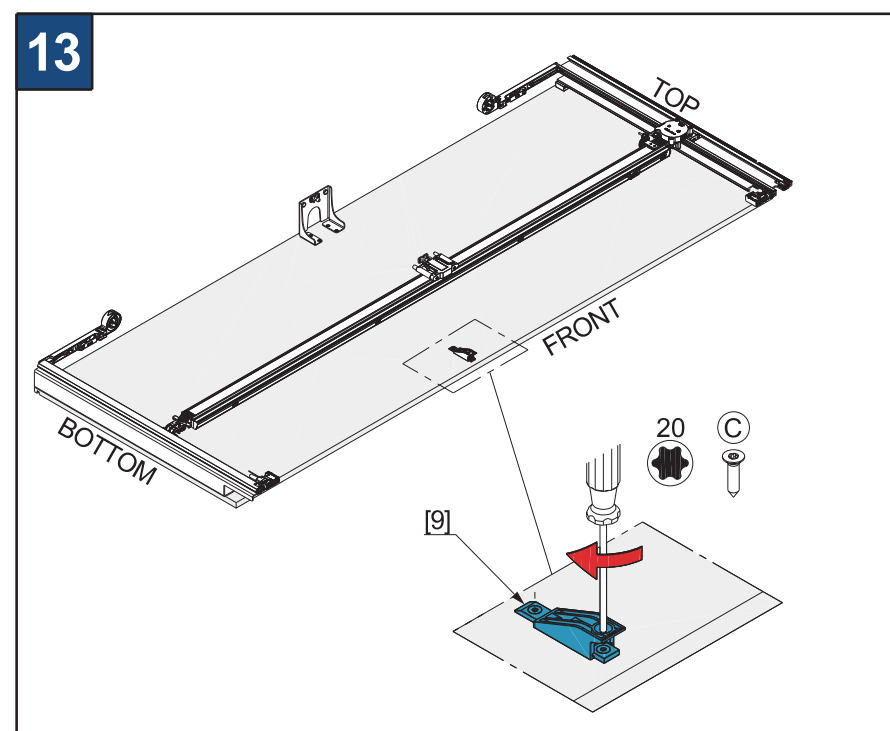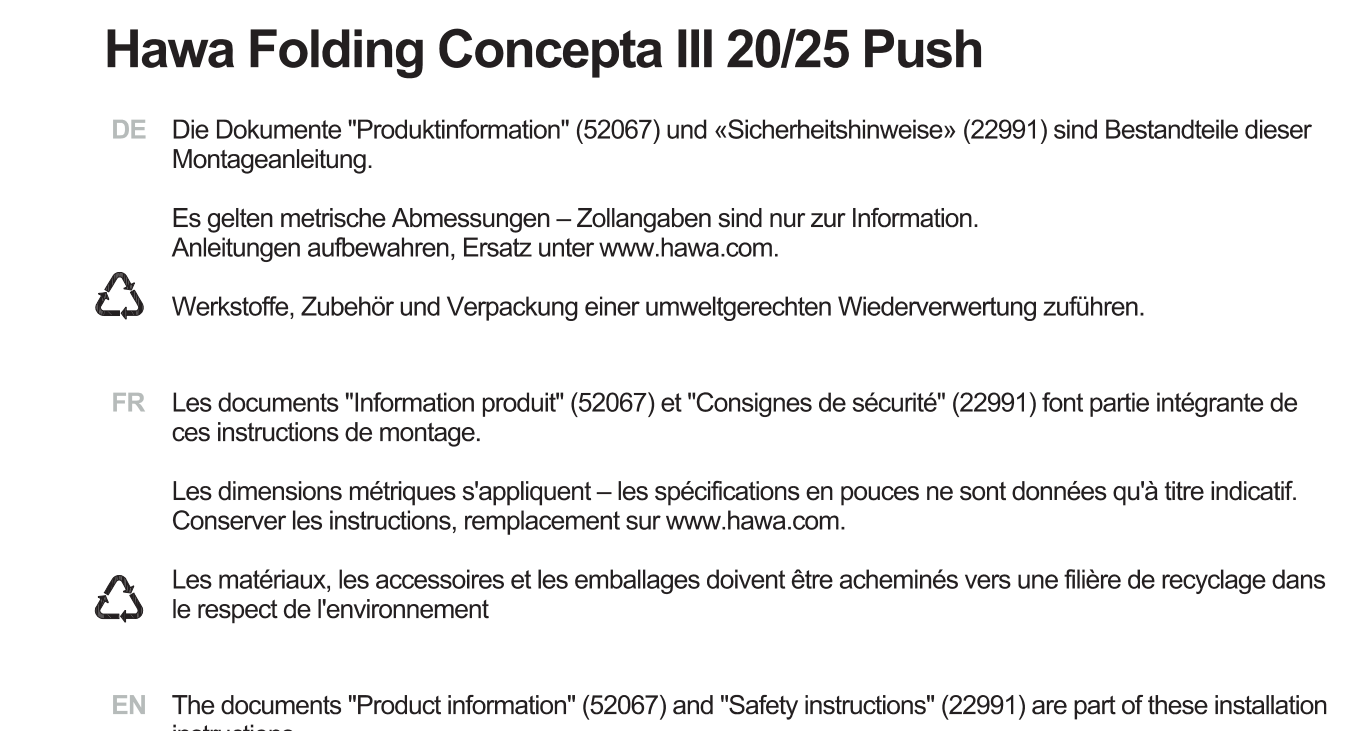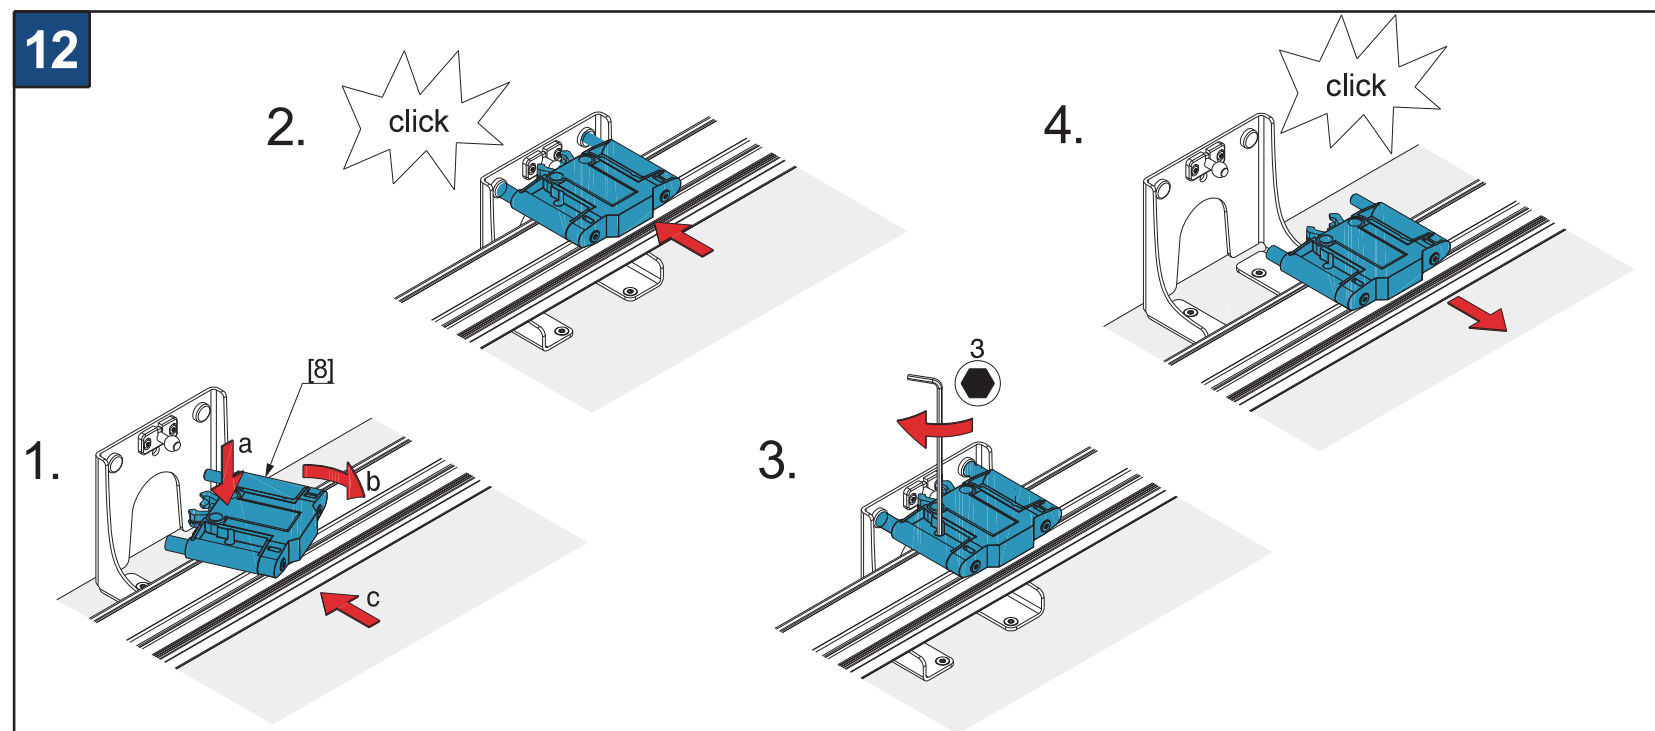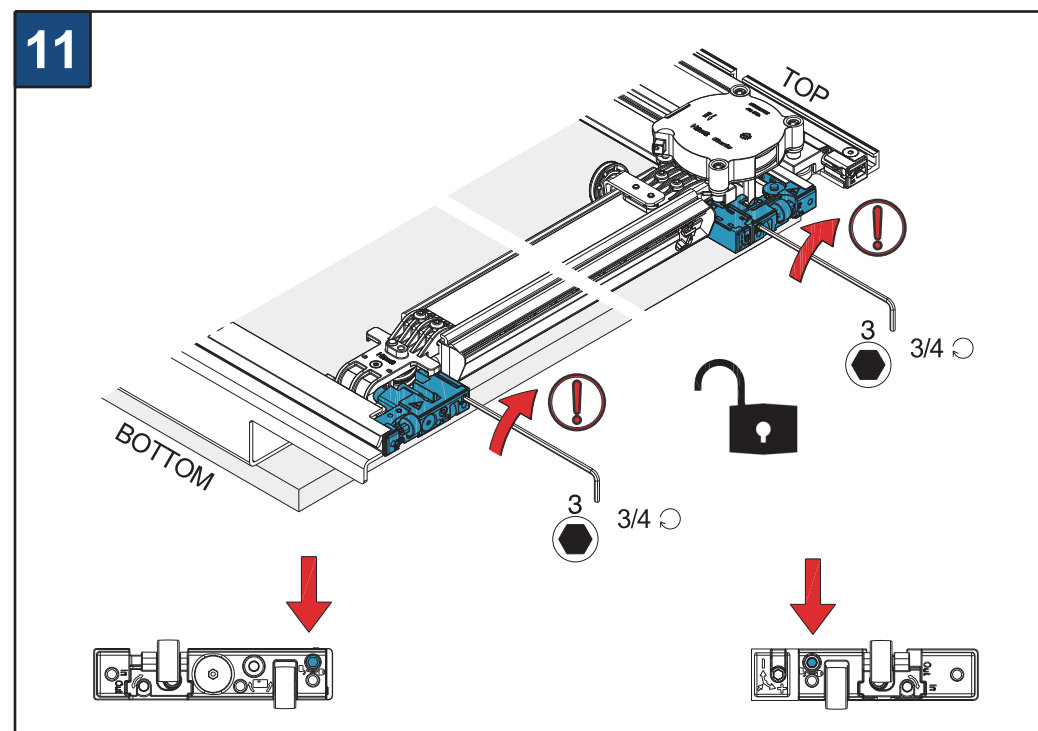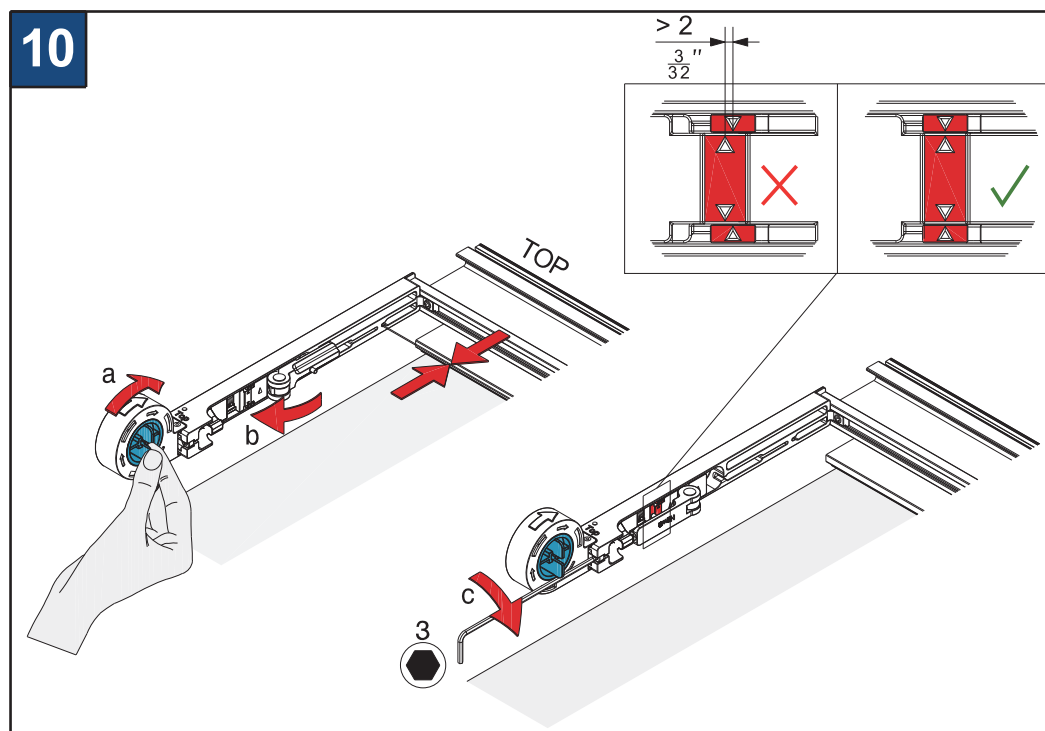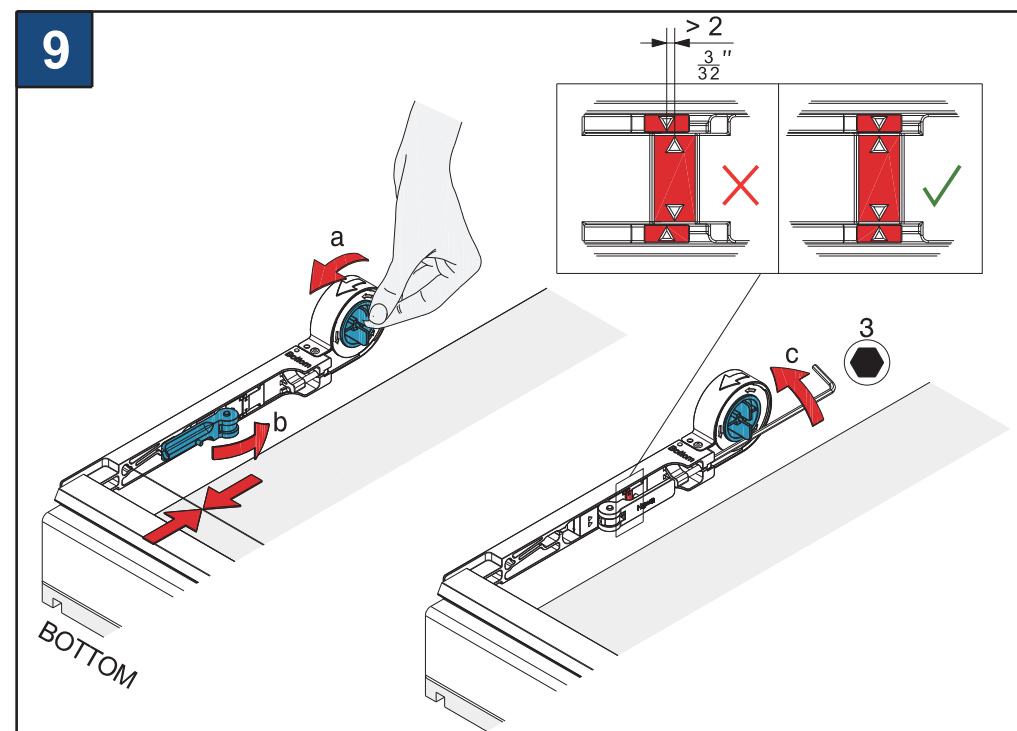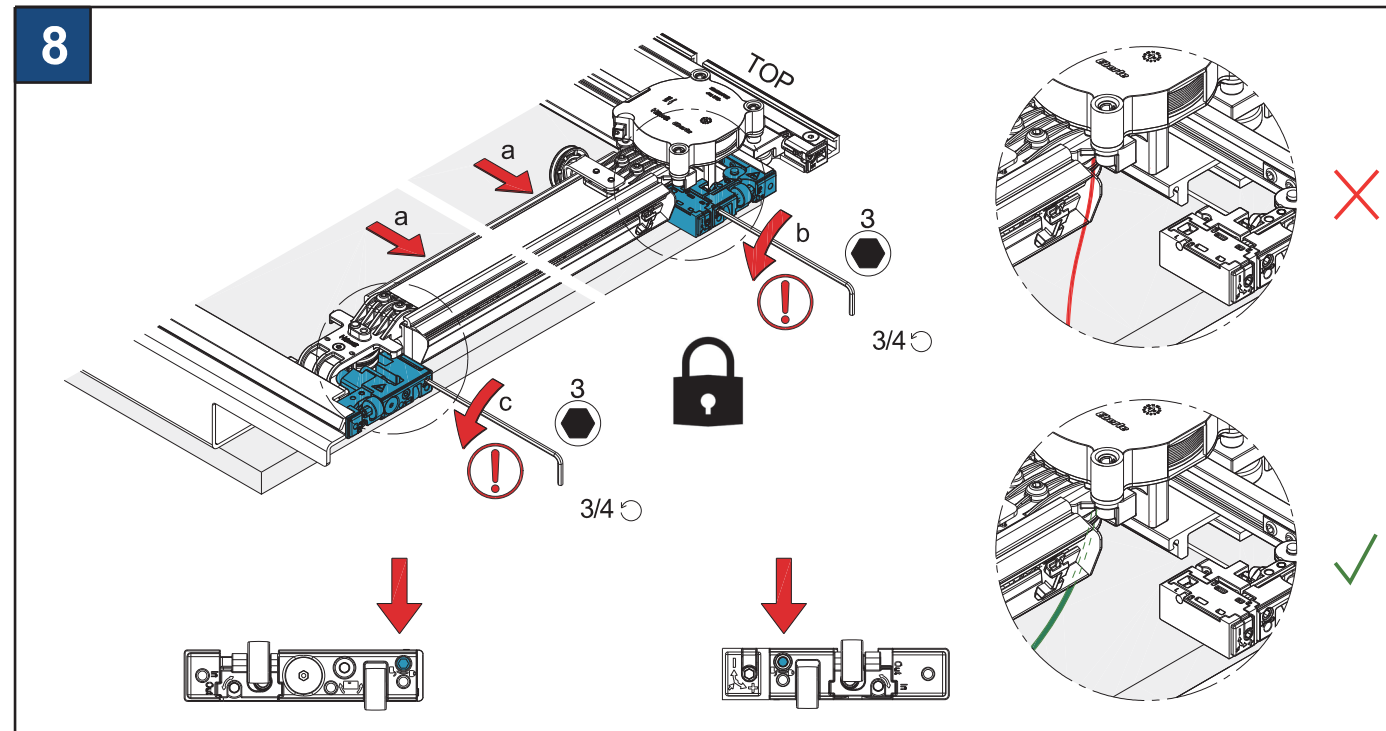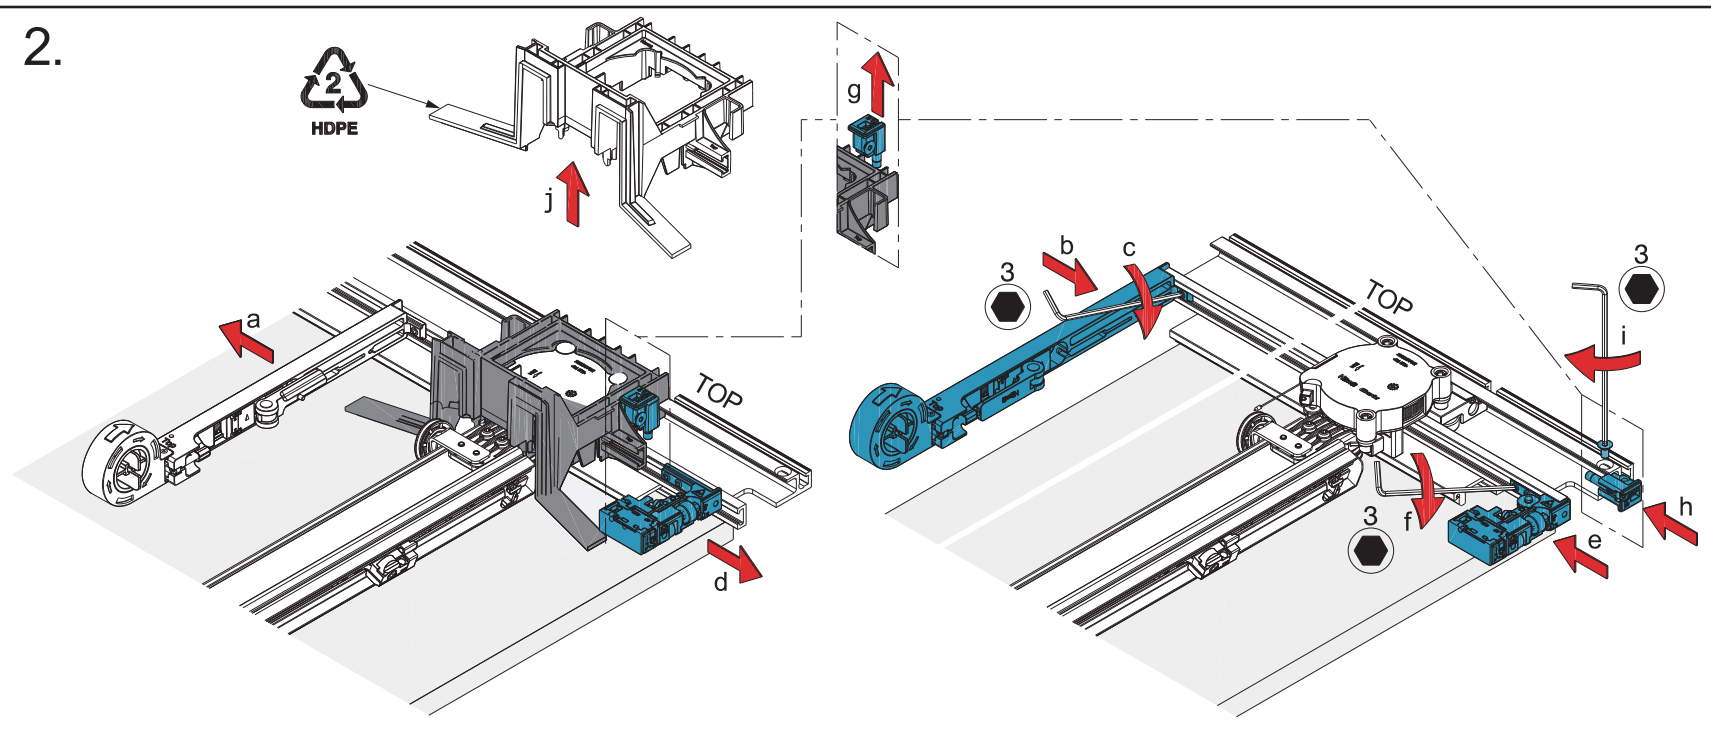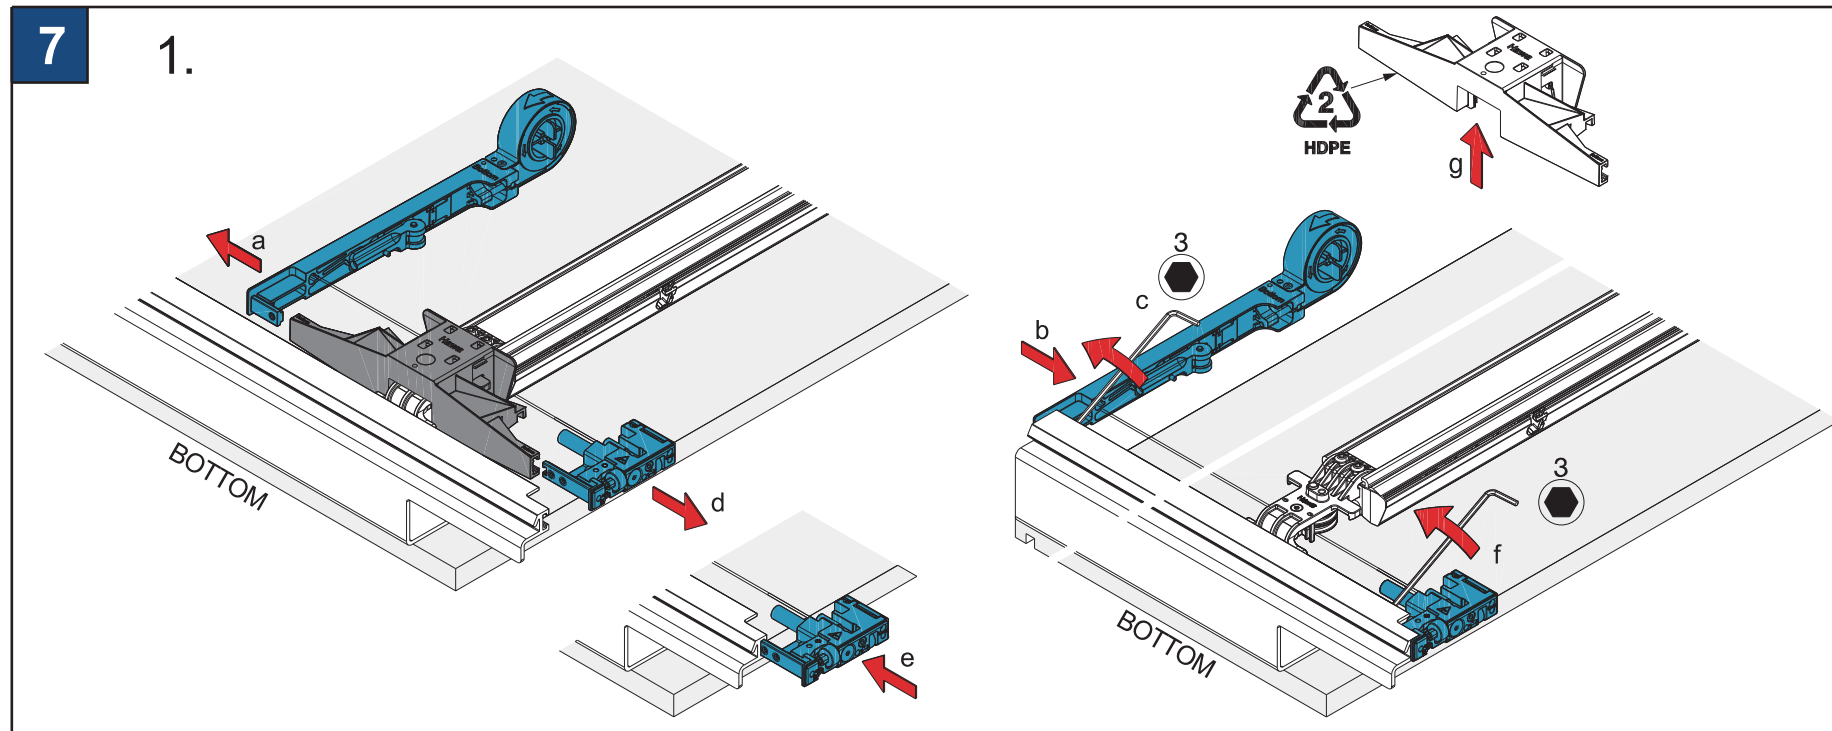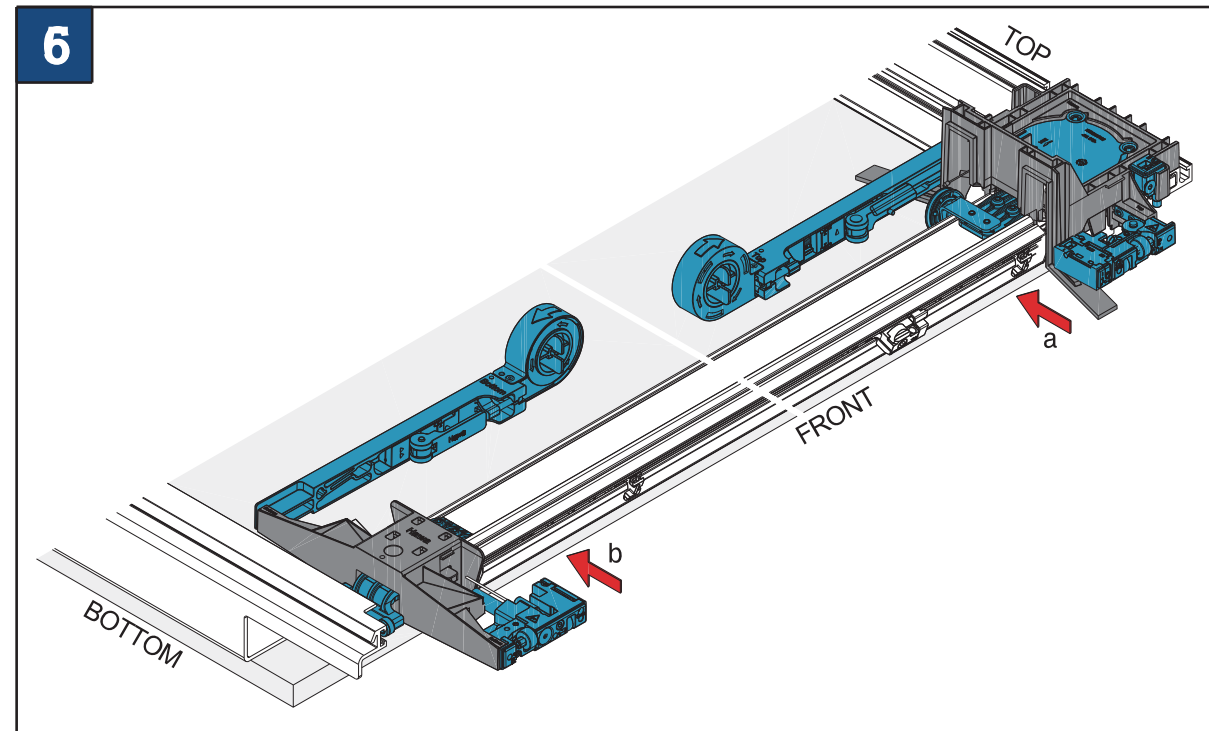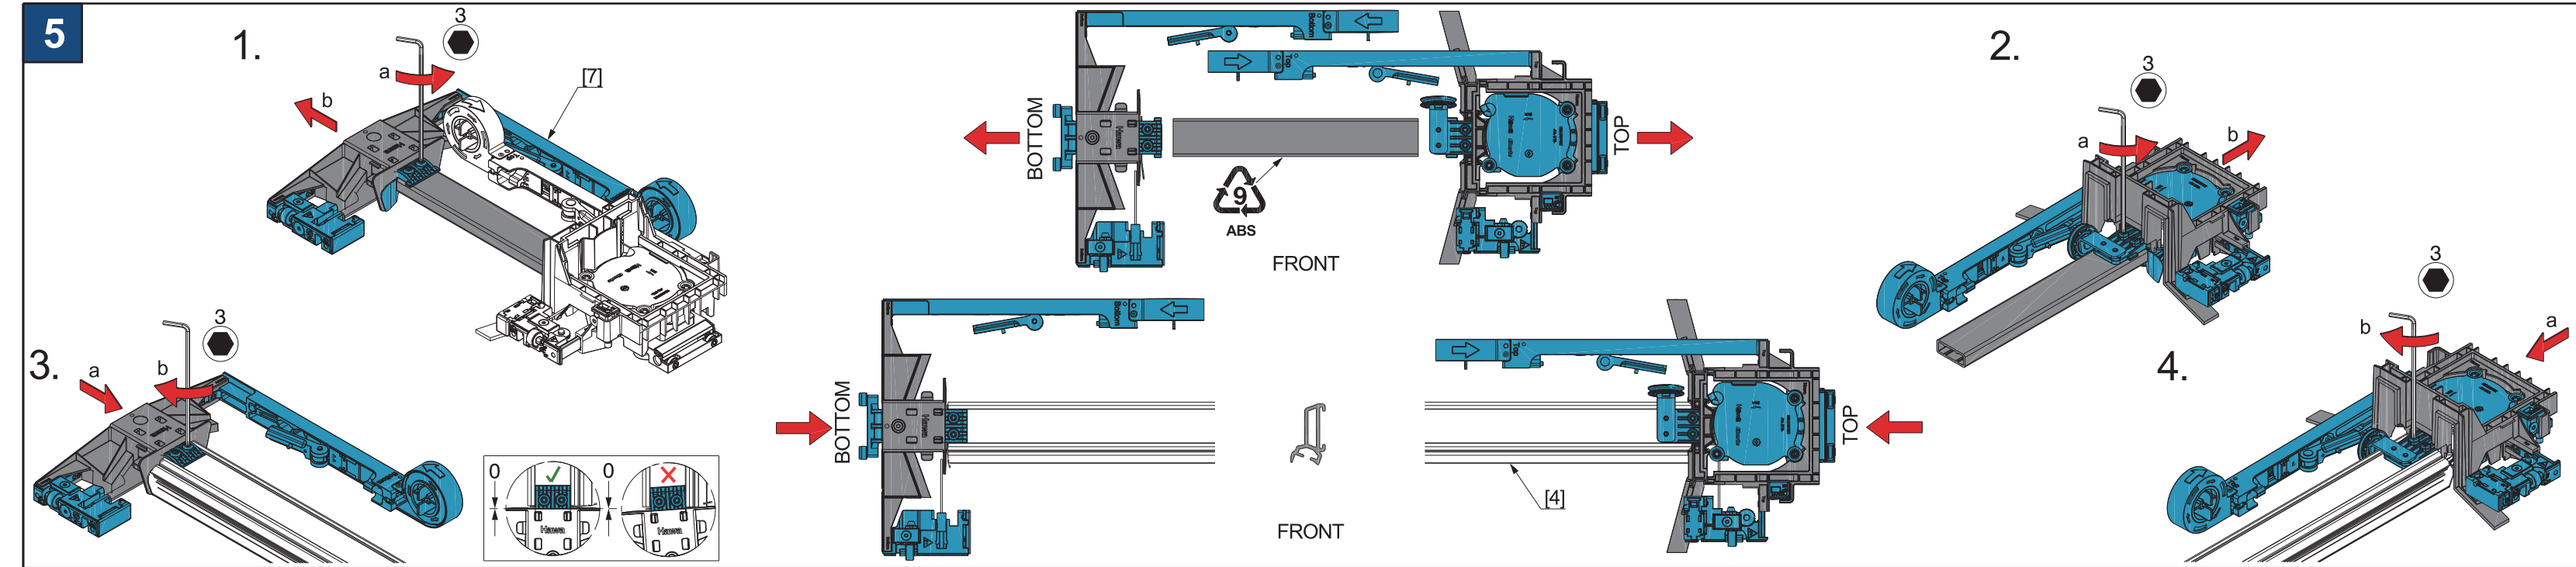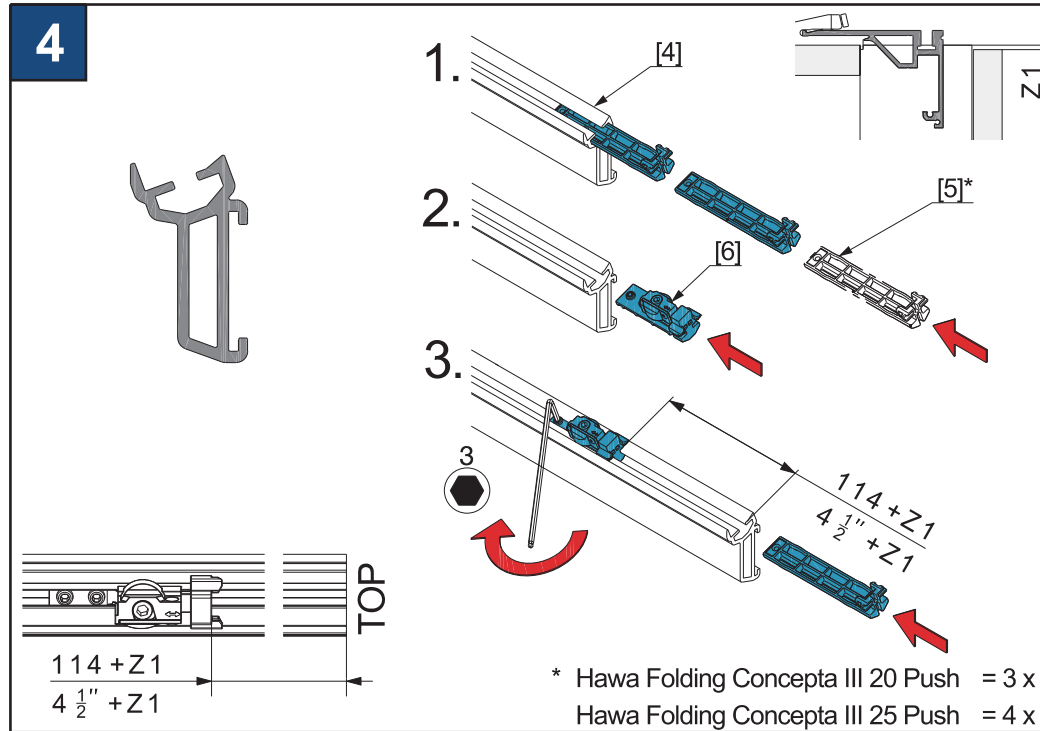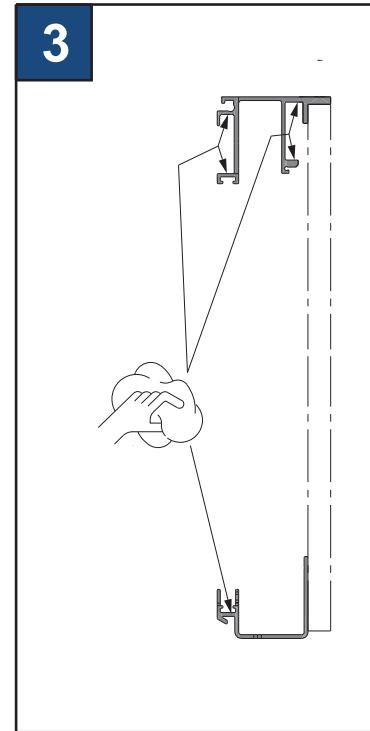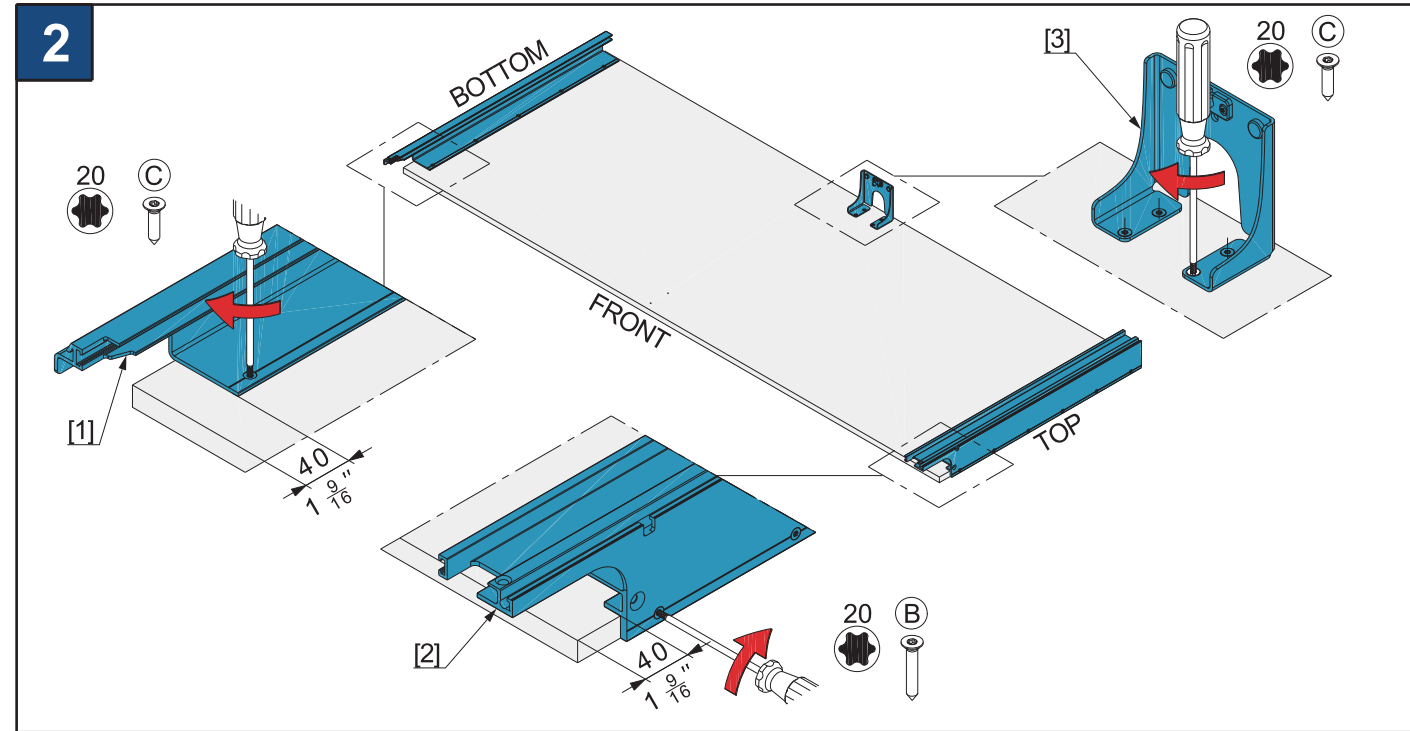

Hawa Folding Concepta III 20/25 Push

DE Die Dokumente "Produktinformation" (52067) und «Sicherheitshinweise» (22991) sind Bestandteile dieser Montageanleitung.

Es gelten metrische Abmessungen – Zollangaben sind nur zur Information. Anleitungen aufbewahren, Ersatz unter www.hawa.com.

Werkstoffe, Zubehör und Verpackung einer umweltgerechten Wiederverwertung zuführen.

FR Les documents "Information produit" (52067) et "Consignes de sécurité" (22991) font partie intégrante de ces instructions de montage.

Les dimensions métriques s'appliquent – les spécifications en pouces ne sont données qu'à titre indicatif. Conserver les instructions, remplacement sur www.hawa.com.

Les matériaux, les accessoires et les emballages doivent être acheminés vers une filière de recyclage dans le respect de l'environnement

EN The documents "Product information" (52067) and "Safety instructions" (22991) are part of these installation instructions.

Metric measurements apply – those in inches are for information only. Retain the instructions. Replacements available from www.hawa.com.

Recycle materials, accessories and packaging in an environmentally friendly manner.

IT I documenti "Informazioni sul prodotto" (52067) e "Istruzioni di sicurezza" (22991) fanno parte di queste istruzioni di installazione.

Valgono le dimensioni metriche – i dati imperiali sono forniti solo a titolo informativo. Conservare le istruzioni. In caso di perdita, possono essere scaricate in www.hawa.com.

Riciclare materiali, accessori e imballaggi in modo ecologico.

ES Los documentos "Información sobre el producto" (52067) e "Instrucciones de seguridad" (22991) forman parte de estas instrucciones de Montaje.

Las dimensiones corresponden al sistema métrico – las medidas en pulgadas se indican solo a título informativo. Conserve estas instrucciones. Si necesita reponerlas, visite www.hawa.com.

Deposite en un punto de reciclaje adecuado los diversos materiales, los accesorios y el embalaje.

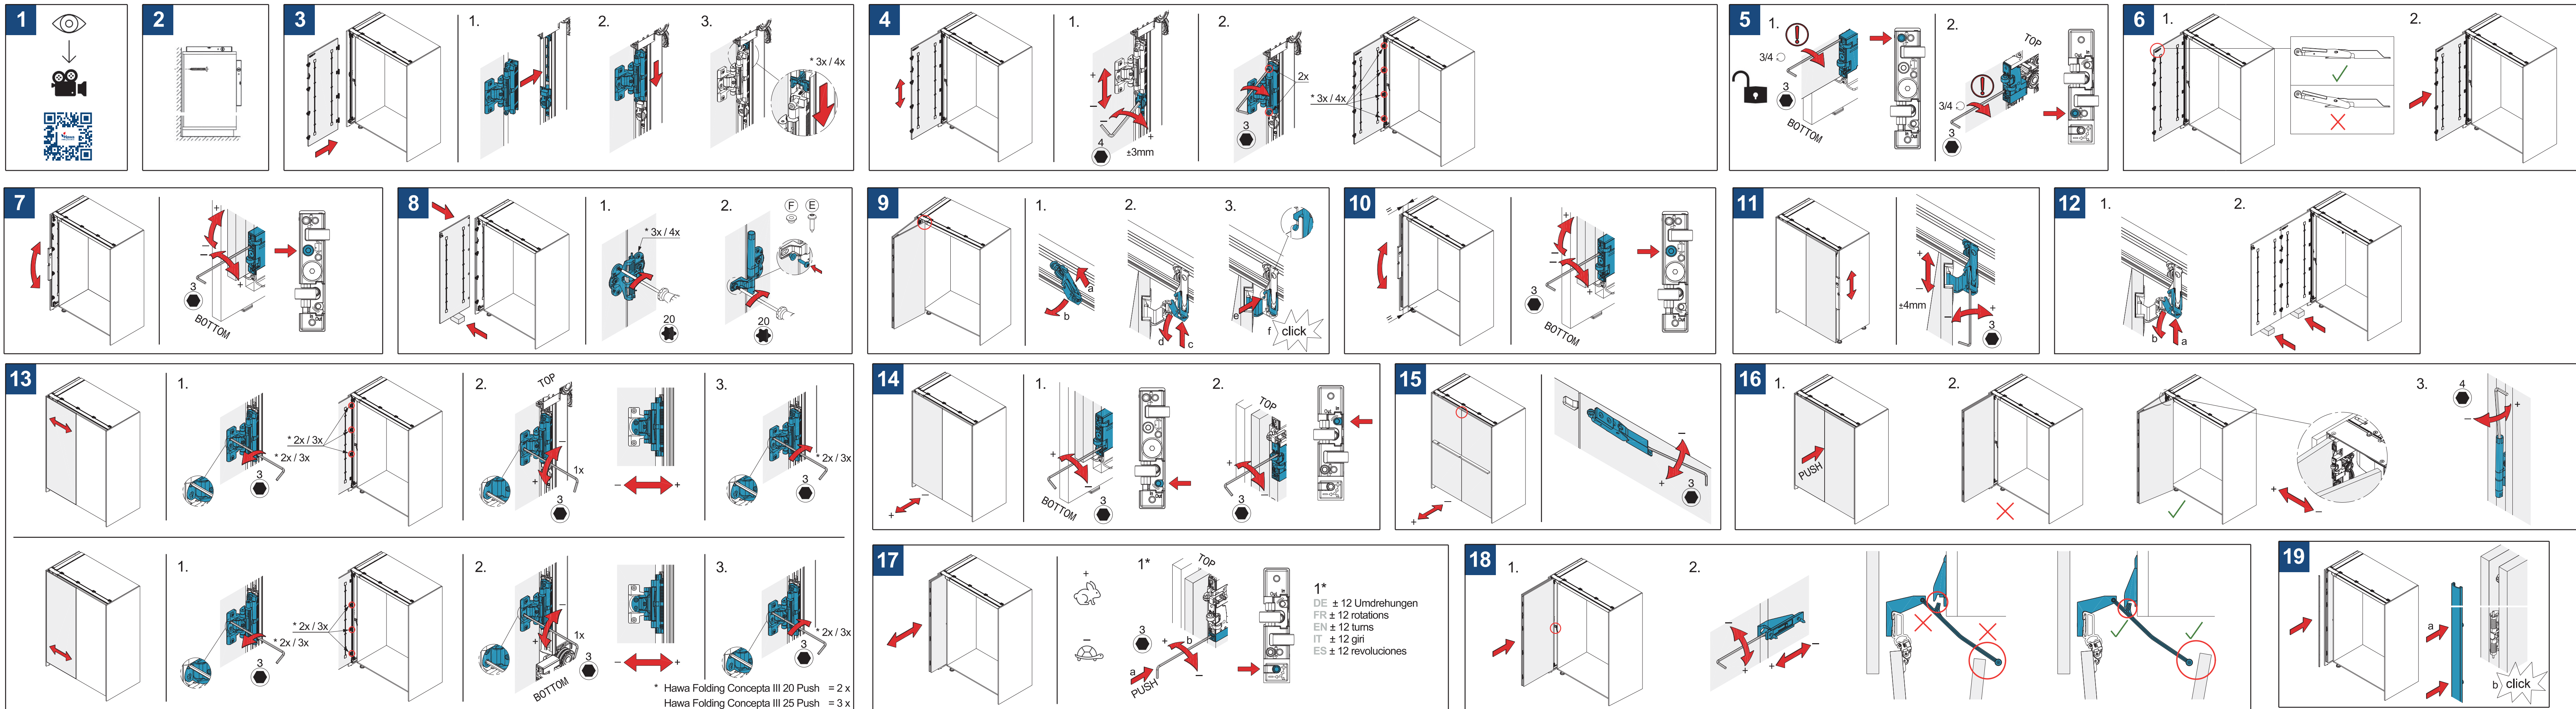
Hawa Folding Concepta III 20/25 Push

DE Montage am Bau und Justieranleitung Anlage links
 FR Montage sur site et instructions de réglage Installation à gauche
 EN Installation on buildings and adjustment instructions left-hand system
 IT Montaggio sull'edificio e istruzioni per la regolazione Installazione a sinistra
 ES Instrucciones de montaje y ajuste en el lugar de instalación Instalación a izquierda

Folding Concepta3 Push 20/25 Kg Adjustment

Hawa
 Folding Concepta III
 20 Push = 3 x

Hawa
 Folding Concepta III
 25 Push = 4 x





Inspiring sliding solutions on furniture

Product overview and details



Inspiring sliding solutions on furniture

Hawa Concepta III

Hawa Folding Concepta III

8 Solutions for wood applications

154 Hawa Concepta III

156 Hawa Concepta III 25 Push

163 Hawa Concepta III 25 Pull

170 Hawa Concepta III 35 Push

177 Hawa Concepta III 35 Pull

184 Hawa Folding Concepta III

186 Hawa Folding Concepta III 20 Push

201 Hawa Folding Concepta III 20 Pull

216 Hawa Folding Concepta III 25 Push

231 Hawa Folding Concepta III 25 Pull



Designed for everyday usability

Design is a product performance that you can see, but one you don't have to see. Sliding solutions on furniture are highly functional and yet mostly invisible. This is value they add to the daily use of beautiful furniture.

Wooden pivot and folding/sliding doors

Pivot and folding/sliding doors are the magicians among furniture doors. They make flush-fitting wooden cabinet fronts disappear or reappear with a single movement, can be parked away in barely visible niches, and run into the cushioned end position independently. This opens up creative application options for doors and gateways: from the pop-up home office to the utility room in the bathroom and the kitchen in the living room.



Discover our fitting solutions for wooden pivot and folding/sliding doors from **Page 154**



Hawa Concepta III for wooden pivot/slide-in doors

Flowing transitions make rooms more flexible than ever before

Hawa Concepta III supports the trend towards open living spaces, and creates transitions from kitchen to living room or from workplace to living area in a more fluid way than ever before.

Doors of any size can be pivoted, slid in sideways and parked in an extremely small space, almost in the blink of an eye.

They can then be brought out again with a gentle tap and closed flush with the surface, so that all that remains visible of the kitchen is an aesthetic front. This works so easily and intuitively that it is even possible to dispense with handles.

We weren't just thinking about the users during the development of the Hawa Concepta III: The system impresses with its simplicity, even during installation and adjustment. This is all based on technology that is just as invisible as a kitchen that is currently not in use.



Area of application

Cabinet constructions for multi-functional use of rooms which contain kitchens, home offices, washer/dryer combinations and storage space, which are freely accessible and disappear behind the cabinet front with pivot / slide-in hardware if required.

System advantages

-  **Flexibility** Variable door dimensions: **half-height to floor-to-ceiling solutions** possible, including **walk-on solutions**
-  **Productivity** **Easy installation** thanks to high degree of pre-assembly
Intuitive adjustment with easily accessible adjustment points
-  **Comfort** **Ergonomic movement support** for even, smooth movement
Opening and closing with very little effort – one hand is enough
-  **Aesthetics** Uniform, **flush front design** with even gap pattern
Allows constructions **with and without a handle** – the **technology remains invisible**

Technical specifications


	max.	25 / 35 kg
		1200 – 2700 mm
		440 – 750 mm
		18 – 26 mm

Good to know (accessories)


- Connector makes overlaid furniture structures possible
- Straightening fitting for doors

Installation examples

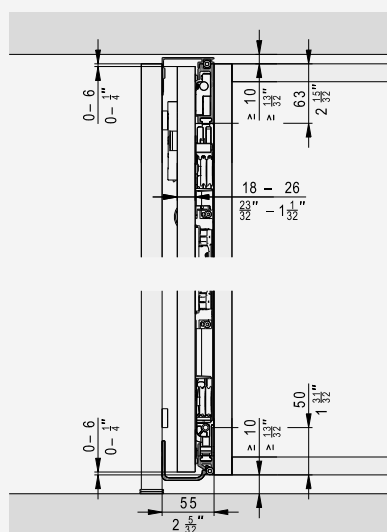
Hawa Concepta III 25/35 Push




Hawa Concepta III 25/35 Pull

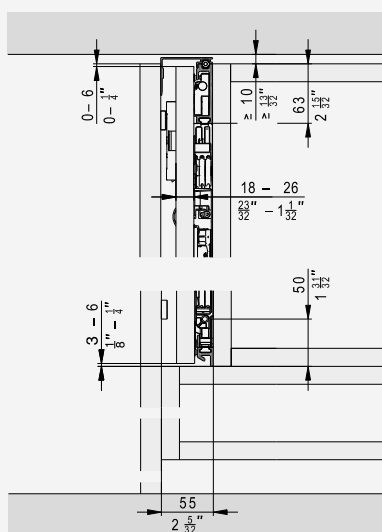


Hawa Concepta 25/35 Push

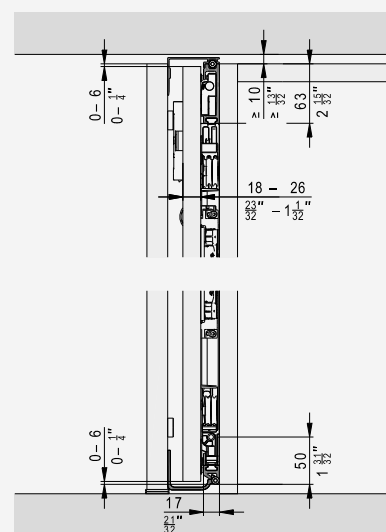


Door striking against the top and bottom cabinet sections



Composed cabinet overlay doors



Overlay door without base




Fitting for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.).
Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

- Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
- Comfort** Ergonomic movement support for even, smooth movement
- Aesthetics** Cabinet designs without handle – the technology remains invisible


Technical specifications

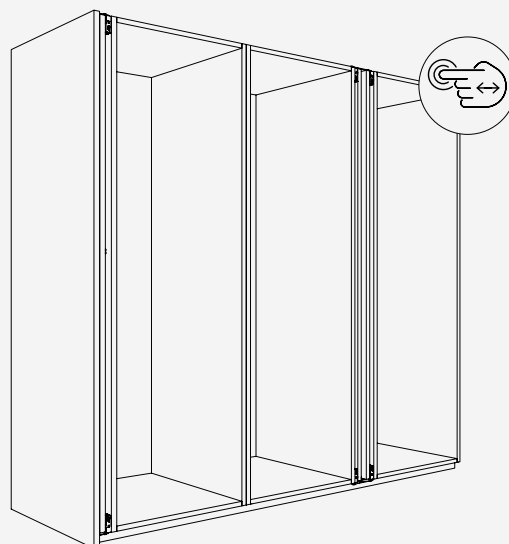- 6–25 kg (13 to 55 lbs.)
- 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
- 440–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")





Installation examples

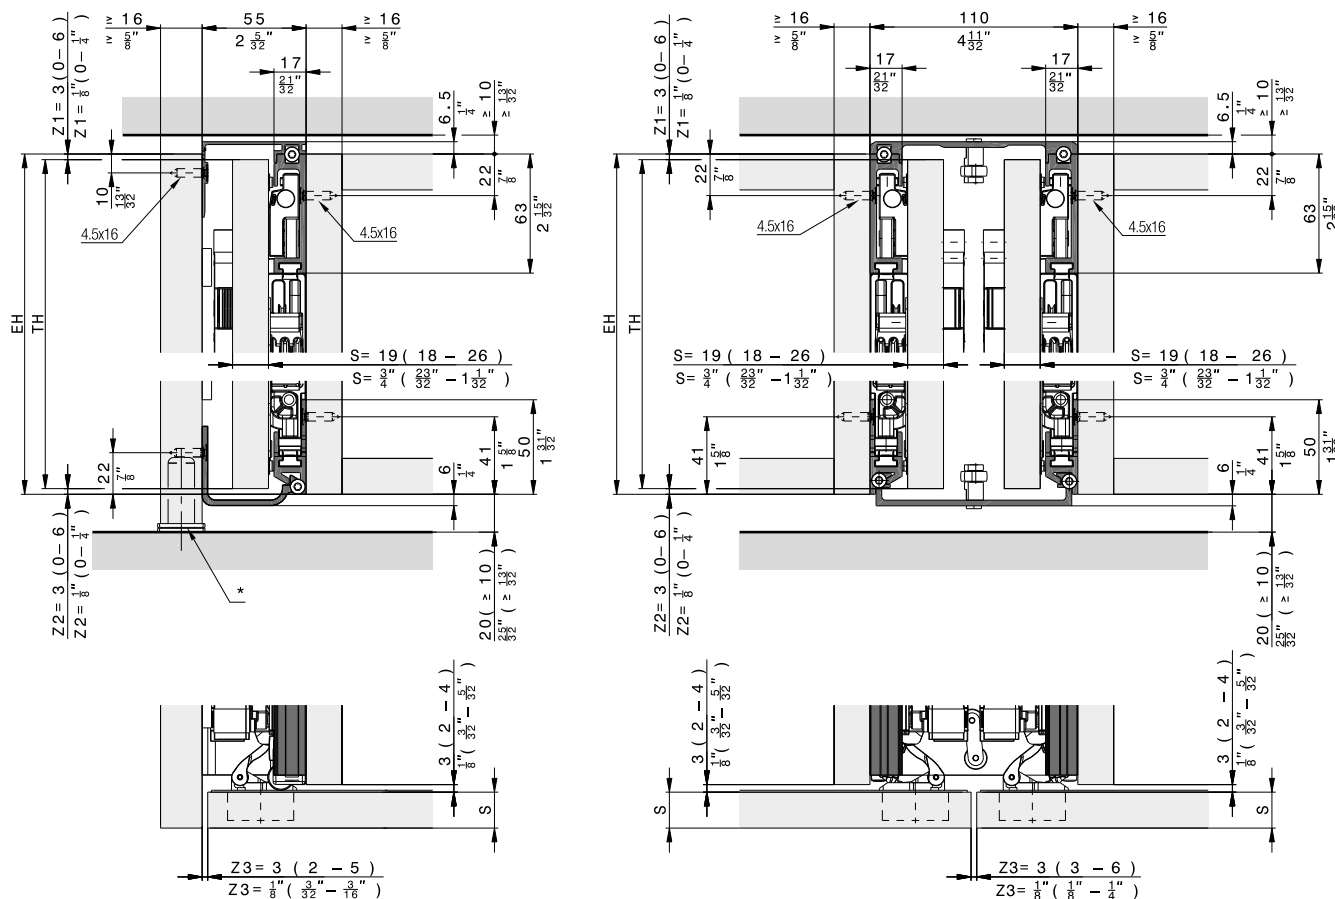Door striking against the top and bottom cabinet sections



* Recommendation: Use adjustable foot

Components required for one cabinet



Hawa Concepta III 25 Push, left

No.	
30994	Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
30998	Hawa Concepta III 25/35 Push, slide-in set, left
30778	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")

Hawa Concepta III 25 Push, right

No.	
30995	Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
30999	Hawa Concepta III 25/35 Push, slide-in set, right
30778	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm						
		440	500	550	600	650	700	750
Door height in mm	2200	25	25	25	25	25	25	24
	2150	25	25	25	25	25	25	23
	2100	25	25	25	25	25	24	23
	2050	25	25	25	25	25	24	22
	2000	25	25	25	25	25	23	21
	1950	25	25	25	25	24	22	21
	1900	25	25	25	25	23	21	20
	1850	25	25	25	24	22	21	19
	1800	25	25	25	23	21	20	19
	1750	25	25	25	22	21	19	18
	1700	25	25	24	22	20	19	17
	1650	25	25	23	21	19	18	17
	1600	25	24	22	20	18	17	16
	1550	25	23	21	19	18	16	15
	1500	24	22	20	18	17	16	15
	1450	23	21	19	17	16	15	14
	1400	22	20	18	17	15	14	13
	1350	21	19	17	16	15	14	13
	1300	20	18	16	15	14	13	12
	1250	19	17	15	14	13	12	11
	1200	18	16	15	13	12	11	11
		Door weight in kg						

		Door width in inch						
		1' 5 ⁵ / ₁₆ "	1' 7 ¹¹ / ₁₆ "	1' 9 ²¹ / ₃₂ "	1' 11 ⁵ / ₈ "	2' 1 ¹⁹ / ₃₂ "	2' 3 ⁹ / ₁₆ "	2' 5 ¹⁷ / ₃₂ "
Door height in inch	7' 2 ⁵ / ₈ "	55	55	55	55	55	55	53
	7' 2 ¹ / ₃₂ "	55	55	55	55	55	55	51
	6' 10 ¹¹ / ₁₆ "	55	55	55	55	55	53	51
	6' 8 ²³ / ₃₂ "	55	55	55	55	55	53	49
	6' 6 ³ / ₄ "	55	55	55	55	55	51	46
	6' 4 ²⁵ / ₃₂ "	55	55	55	55	53	49	46
	6' 2 ¹³ / ₁₆ "	55	55	55	55	51	46	44
	6' 2 ²⁷ / ₃₂ "	55	55	55	53	49	46	42
	5' 10 ⁷ / ₈ "	55	55	55	51	46	44	42
	5' 8 ²⁹ / ₃₂ "	55	55	55	49	46	42	40
	5' 6 ¹⁵ / ₁₆ "	55	55	53	49	44	42	37
	5' 4 ³¹ / ₃₂ "	55	55	51	46	42	40	37
	5' 3"	55	53	49	44	40	37	35
	5' 1 ¹ / ₃₂ "	55	51	46	42	40	35	33
	4' 11 ¹ / ₁₆ "	53	49	44	40	37	35	33
	4' 9 ⁹ / ₃₂ "	51	46	42	37	35	33	31
	4' 7 ¹ / ₈ "	49	44	40	37	33	31	29
	4' 5 ⁵ / ₃₂ "	46	42	37	35	33	31	29
	4' 3 ³ / ₁₆ "	44	40	35	33	31	29	26
	4' 1 ⁷ / ₃₂ "	42	37	33	31	29	26	24
	3' 11 ¹ / ₄ "	40	35	33	29	26	24	24
		Door weight in lbs.						

Hawa Configurator




www.hawa.com/configurator


List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)




	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995

Set consisting of:

		30994	30995	No.
	Slot nuts for hinge attachment, plastic, black	3	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	3	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 16 pieces, incl. Torx T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

Suitable slide-in set




	No.
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Hawa Concepta III 25/35 Push, slide-in set, right	30999

		30998	30999	No.
	Hawa Concepta III 25/35 Push slide-in unit, left	1		31038
	End stop bracket for push ejector, steel, zinc-plated	1	1	52559
	Push ejector, plastic, black	1	1	52454
	Push-to-open with adapter plate, plastic, black	1	1	30838
	Hawa Concepta III Push set of cover caps, for left-hand stop, plastic, black	1		30818
	Hawa Concepta III 25/35 Push slide-in unit, right		1	31039
	Hawa Concepta III Push set of cover caps, for right-hand stop, plastic, black		1	30827

Uprights

		Nr.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Guides

	No.
	25680

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

	No.
	056.3192.079
	056.3192.073


Aluminum, anodized

	Nr.
	056.3192.080




Aluminum, black anodized

	No.
	056.3192.081
	056.3192.076


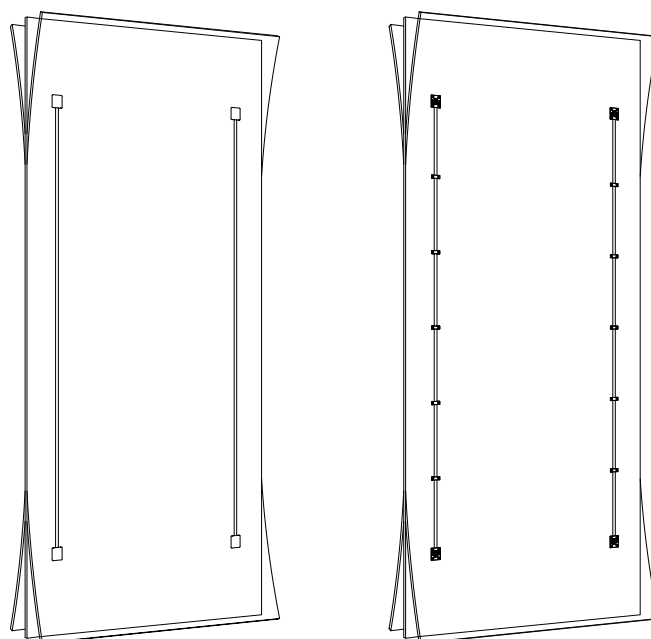
Straightening fitting



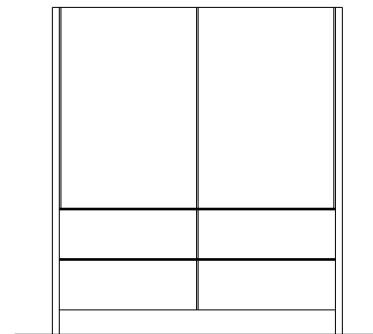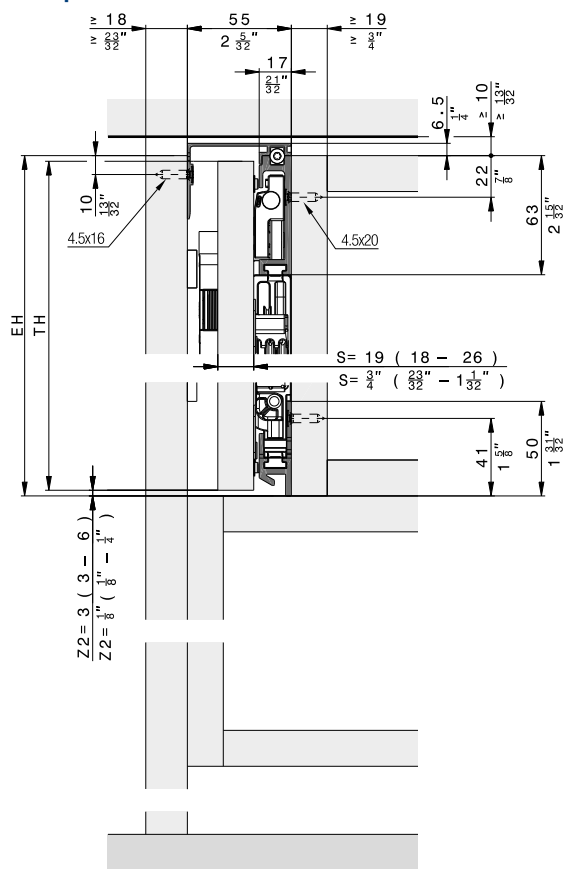Further installation examples Composed cabinet





Cabinet without base panel

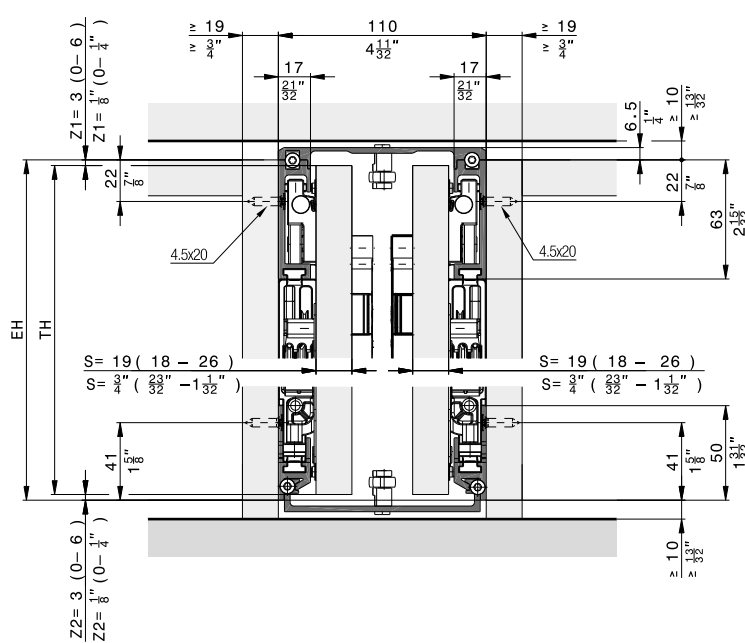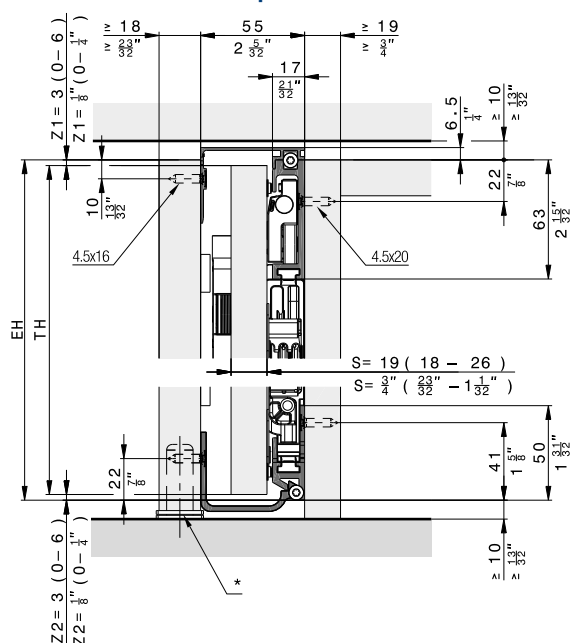


* Recommendation: Use adjustable foot

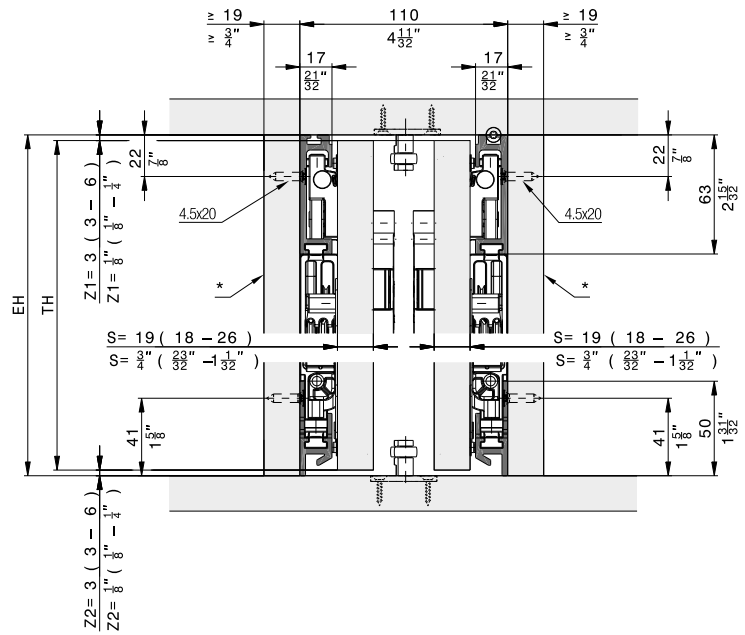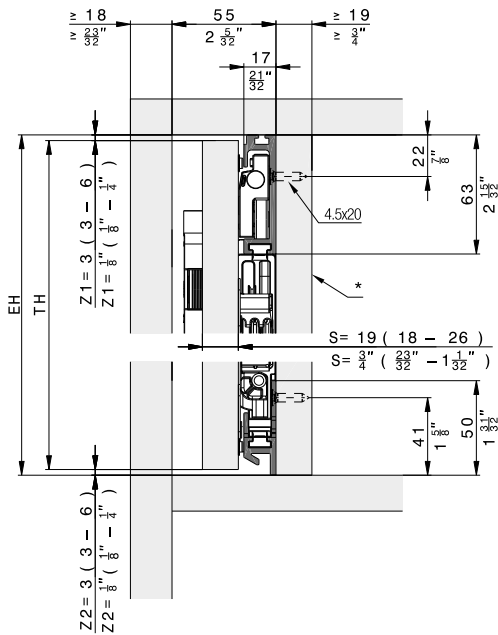Inlaid doors




* removable

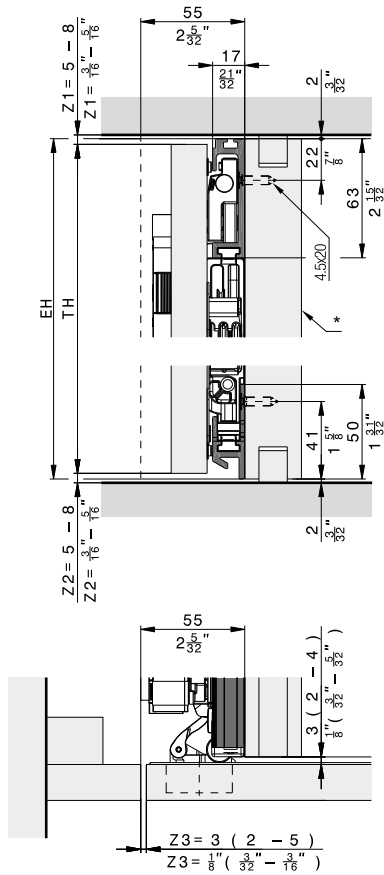Floor-to-ceiling doors



* removable

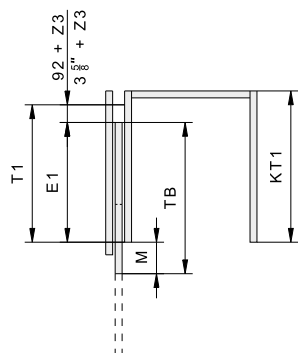
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 ⁵ / ₁₆ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₁₆ " + Z3 - M
E1	TB - M	TB - M
M	≥ S + 3 ≤ TB - 320	≥ S + ¹ / ₈ " ≤ TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door

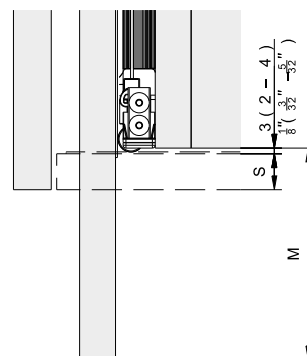

Instructions

Installation	→
Adjustment	→
Connector	→

Videos

Installation	→
Adjustment	→
Connector	→

Accessories

– Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

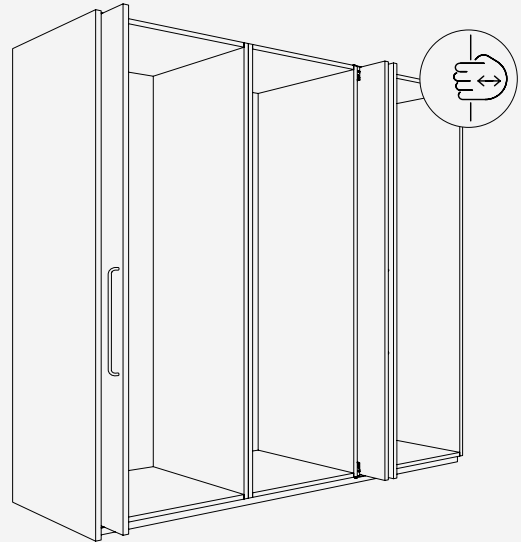
Hardware for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights

- Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
- Comfort** Ergonomic movement support for even, smooth movement
- Aesthetics** Allows constructions with and without handle – the technology remains invisible


Technical specifications

- 6–25 kg (13 to 55 lbs.)
- 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
- 440–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")





Installation examples

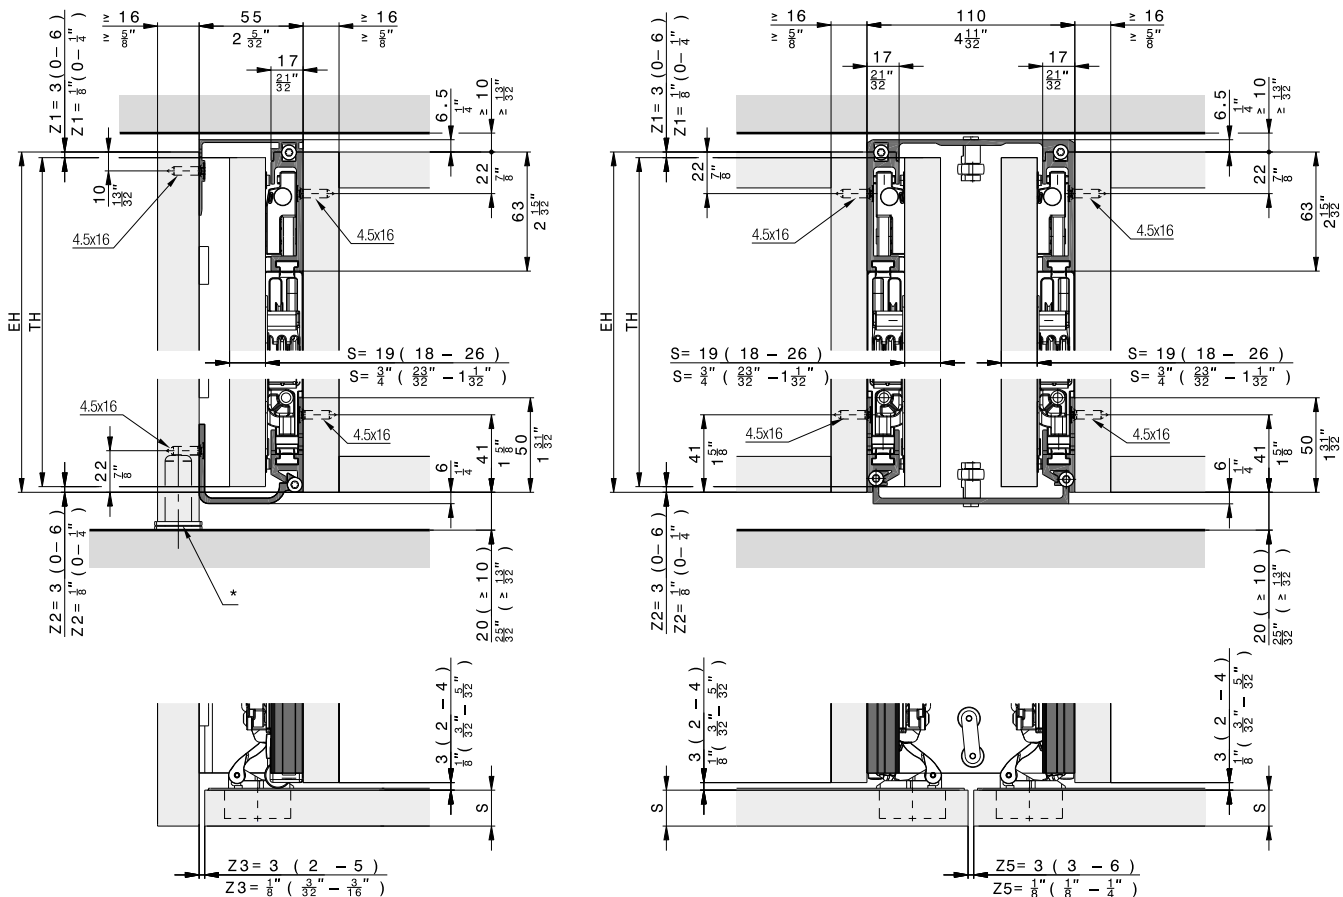Door striking against the top and bottom cabinet sections



* Recommendation: Use adjustable foot

Components required for one cabinet



Hawa Concepta III 25 Pull, left

No.	
30994	Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
31000	Hawa Concepta III 25/35 Pull, slide-in set, left
30778	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")

Hawa Concepta III 25 Pull, right

No.	
30995	Hawa Concepta III 25, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
31001	Hawa Concepta III 25/35 Pull, slide-in set, right
30778	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm						
		440	500	550	600	650	700	750
Door height in mm	2200	25	25	25	25	25	25	24
	2150	25	25	25	25	25	25	23
	2100	25	25	25	25	25	24	23
	2050	25	25	25	25	25	24	22
	2000	25	25	25	25	25	23	21
	1950	25	25	25	25	24	22	21
	1900	25	25	25	25	23	21	20
	1850	25	25	25	24	22	21	19
	1800	25	25	25	23	21	20	19
	1750	25	25	25	22	21	19	18
	1700	25	25	24	22	20	19	17
	1650	25	25	23	21	19	18	17
	1600	25	24	22	20	18	17	16
	1550	25	23	21	19	18	16	15
	1500	24	22	20	18	17	16	15
	1450	23	21	19	17	16	15	14
	1400	22	20	18	17	15	14	13
	1350	21	19	17	16	15	14	13
	1300	20	18	16	15	14	13	12
	1250	19	17	15	14	13	12	11
	1200	18	16	15	13	12	11	11
		Door weight in kg						

		Door width in inch						
		1' 5 5/16"	1' 7 11/16"	1' 9 21/32"	1' 11 5/8"	2' 1 19/32"	2' 3 9/16"	2' 5 17/32"
Door height in inch	7' 2 5/8"	55	55	55	55	55	55	53
	7' 2 1/32"	55	55	55	55	55	55	51
	6' 10 11/16"	55	55	55	55	55	53	51
	6' 8 23/32"	55	55	55	55	55	53	49
	6' 6 3/4"	55	55	55	55	55	51	46
	6' 4 25/32"	55	55	55	55	53	49	46
	6' 2 13/16"	55	55	55	55	51	46	44
	6' 27/32"	55	55	55	53	49	46	42
	5' 10 7/8"	55	55	55	51	46	44	42
	5' 8 29/32"	55	55	55	49	46	42	40
	5' 6 15/16"	55	55	53	49	44	42	37
	5' 4 31/32"	55	55	51	46	42	40	37
	5' 3"	55	53	49	44	40	37	35
	5' 1 1/32"	55	51	46	42	40	35	33
	4' 11 1/16"	53	49	44	40	37	35	33
	4' 9 3/32"	51	46	42	37	35	33	31
	4' 7 1/8"	49	44	40	37	33	31	29
	4' 5 5/32"	46	42	37	35	33	31	29
	4' 3 3/16"	44	40	35	33	31	29	26
	4' 1 7/32"	42	37	33	31	29	26	24
	3' 11 1/4"	40	35	33	29	26	24	24
		Door weight in lbs.						

Hawa Configurator

www.hawa.com/configurator







List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995



Set consisting of:

		30994	30995	No.
	Slot nuts for hinge attachment, plastic, black	3	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	3	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 16 pieces, incl. Torx T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Hawa Concepta III 25/35 Pull, slide-in set, right	31001





Set consisting of:

		31000	31001	No.
	Hawa Concepta III 25/35 Pull slide-in unit, left	1		31040
	End stop bracket Pull, steel zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III Pull set of cover caps, for left-hand stop, plastic, black	1		30964
	Hawa Concepta III 25/35 Pull slide-in unit, right		1	31041
	Hawa Concepta III Pull set of cover caps, for right-hand stop, plastic, black		1	30965

Uprights

		Nr.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Guides

	No.
	25680

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32" to 5' 9 7/8"), aluminum	056.3192.079
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32" to 5' 9 7/8"), aluminum, can be shortened for doors smaller 1215 mm (3'11 27/32")	056.3192.073


Aluminum, anodized

		Nr.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32" to 7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32")	056.3192.080




Aluminum, black anodized

		No.
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32'' to 7' 5 9/16''), aluminum, black anodized	056.3192.081
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32'' to 5' 9 7/8''), aluminum, black anodized, can be shortened for doors smaller 1215 mm (3' 11 27/32'')	056.3192.076


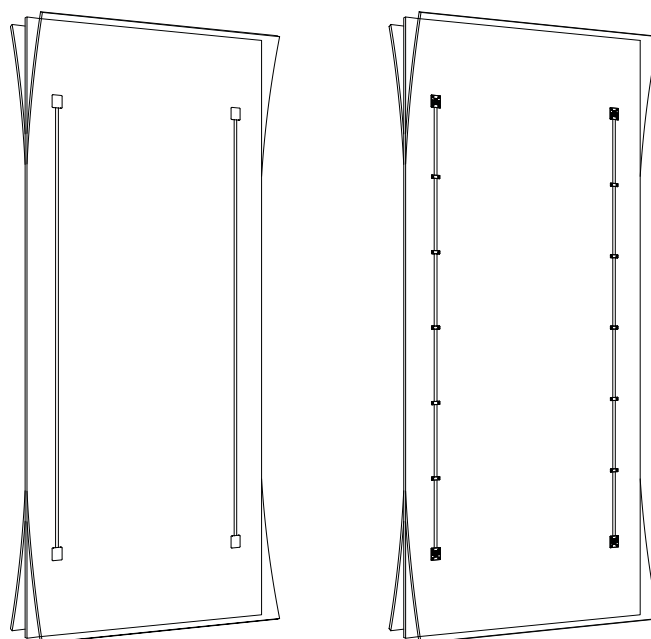
Straightening fitting



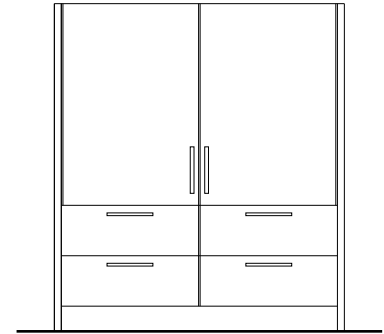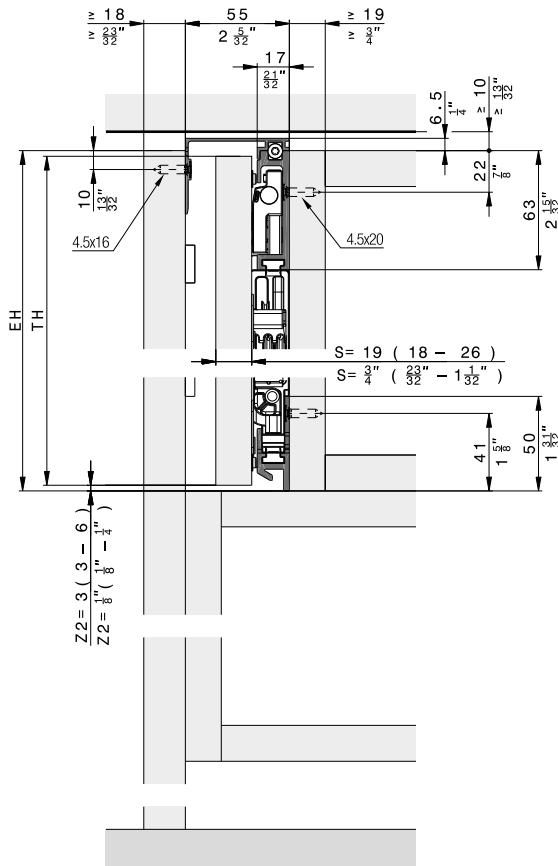Further installation examples Composed cabinet




Cabinet without base panel

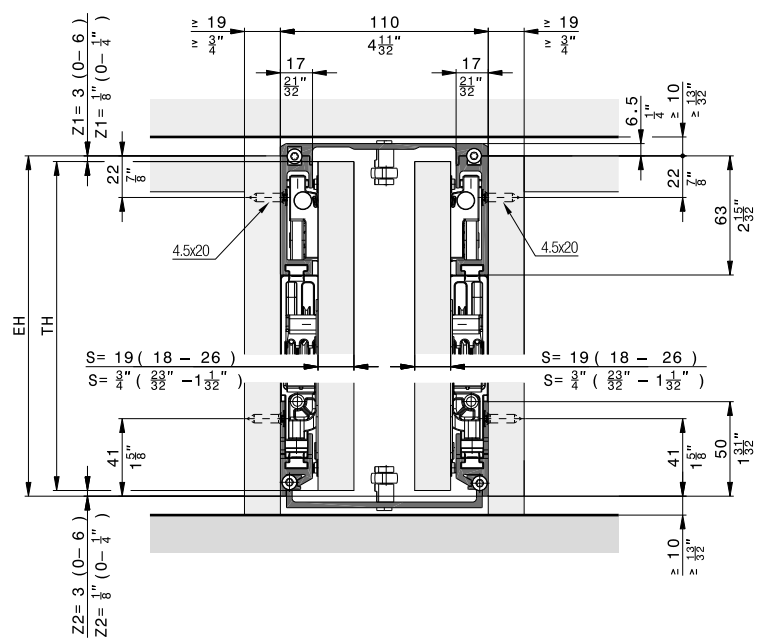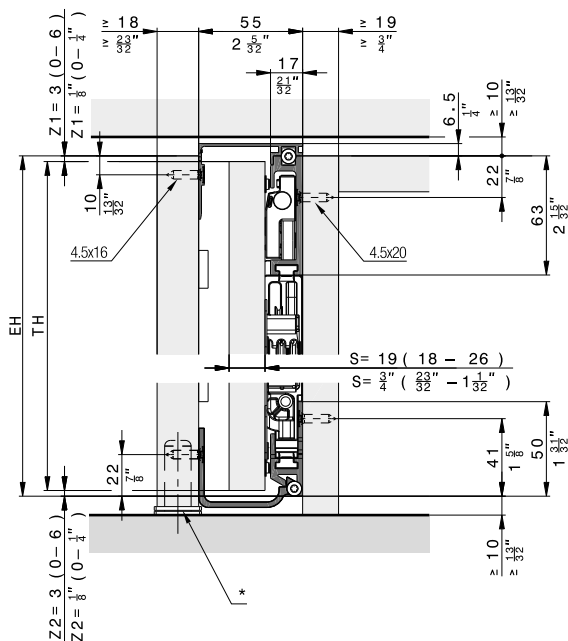


* Recommendation: Use adjustable foot

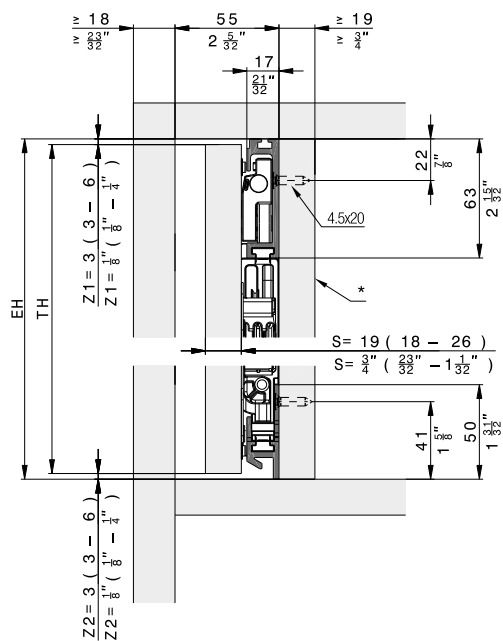
Inlaid doors



* removable

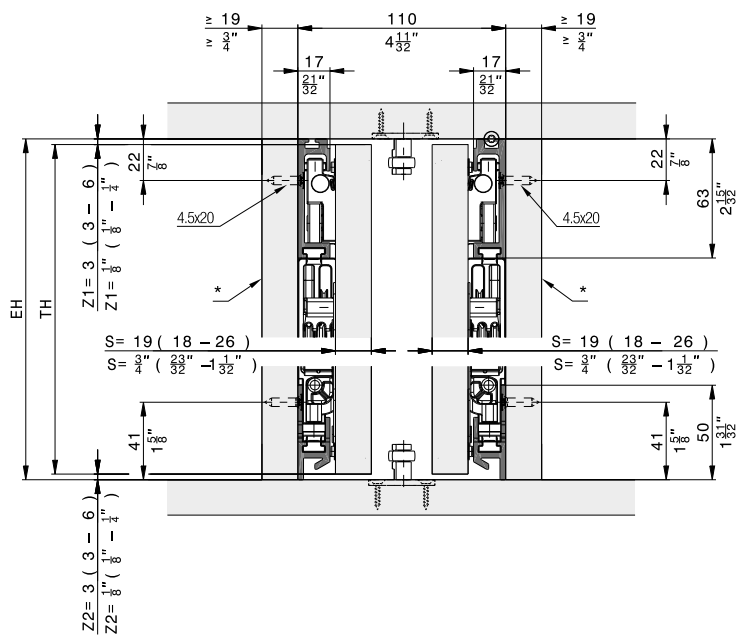


Floor-to-ceiling doors

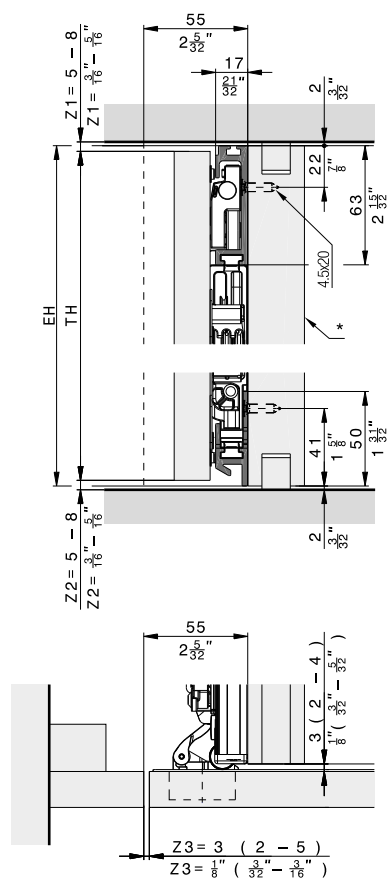

* removable

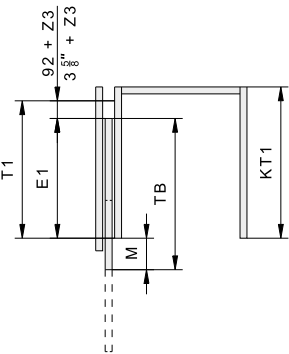
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 ⁵ / ₁₆ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₁₆ " + Z3 - M
E1	TB - M	TB - M
M	≥S+3 ≤TB-320	≥S + ¹ / ₈ " ≤TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door

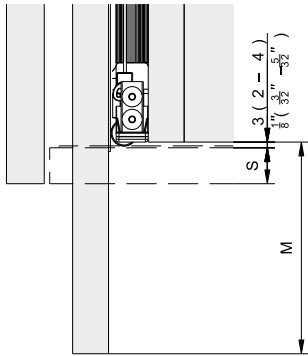

Instructions

- Installation →
- Adjustment →
- Connector →

Videos

- Installation →
- Adjustment →
- Connector →

Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

Fitting for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights



Productivity

Easy installation thanks to high degree of pre-assembly with intuitive adjustment



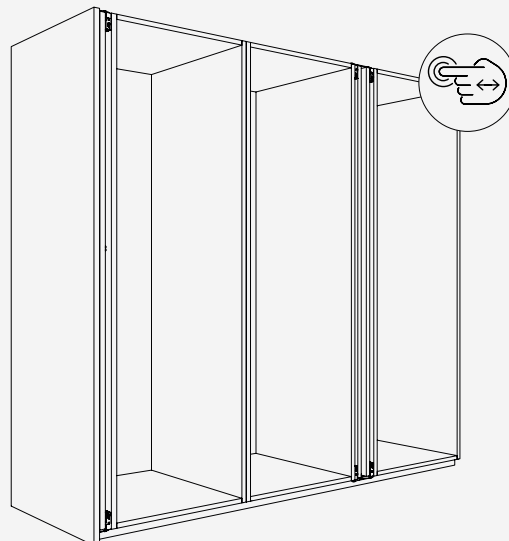
Comfort

Ergonomic movement support for even, smooth movement



Aesthetics

Cabinet designs without handle – the technology remains invisible



Technical specifications



10–35 kg (22 to 77 lbs.)



1900–2700 mm (6' 2 13/16" to 8' 10 5/16")



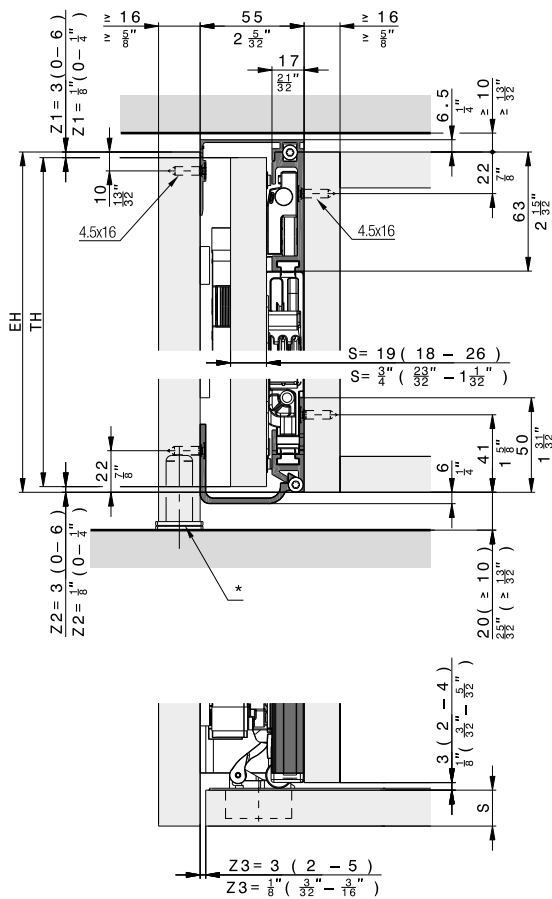
440–750 mm (1' 5 5/16" to 2' 5 17/32")




18–26 mm (23/32" to 1 1/32")

Installation examples



Door striking against the top and bottom cabinet sections



* Recommendation: Use adjustable foot

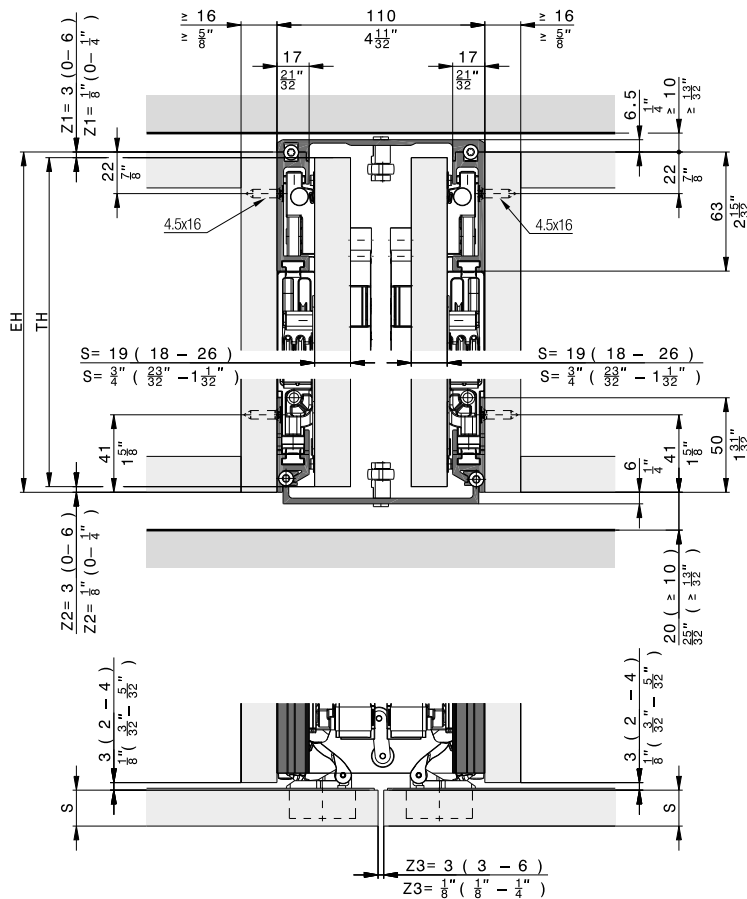

Components required for one cabinet



Hawa Concepta III 35 Push, left

No.	
30996	Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
30998	Hawa Concepta III 25/35 Push, slide-in set, left
30771	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")

Hawa Concepta III 35 Push, right

No.	
30997	Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
30999	Hawa Concepta III 25/35 Push, slide-in set, right
30771	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm						
		440	500	550	600	650	700	750
Door height in mm	2700	35	35	35	35	35	35	35
	2650	35	35	35	35	35	35	35
	2600	35	35	35	35	35	35	35
	2550	35	35	35	35	35	35	35
	2500	35	35	35	35	35	35	35
	2450	35	35	35	35	35	35	34
	2400	35	35	35	35	35	35	33
	2350	35	35	35	35	35	34	32
	2300	35	35	35	35	35	34	31
	2250	35	35	35	35	35	33	31
	2200	35	35	35	35	34	32	30
	2150	35	35	35	35	33	31	29
	2100	35	35	35	35	32	30	28
	2050	35	35	35	34	31	29	27
	2000	35	35	35	33	30	28	26
	1950	35	35	35	32	29	27	26
	1900	35	35	34	31	29	27	25
		Door weight in kg						

Maximum weights in kg

		Door width in inch						
		1' 5 5/16"	1' 7 11/16"	1' 9 21/32"	1' 11 5/8"	2' 1 19/32"	2' 3 9/16"	2' 5 17/32"
Door height in inch	8' 10 5/16"	77	77	77	77	77	77	77
	8' 8 11/32"	77	77	77	77	77	77	77
	8' 6 3/8"	77	77	77	77	77	77	77
	8' 4 13/32"	77	77	77	77	77	77	77
	8' 2 7/16"	77	77	77	77	77	77	77
	8' 15/32"	77	77	77	77	77	77	75
	7' 10 1/2"	77	77	77	77	77	77	73
	7' 8 17/32"	77	77	77	77	77	75	71
	7' 6 9/16"	77	77	77	77	77	75	68
	7' 4 19/32"	77	77	77	77	77	73	68
	7' 2 5/8"	77	77	77	77	75	71	66
	7' 21/32"	77	77	77	77	73	68	64
	6' 10 11/16"	77	77	77	77	71	66	62
	6' 8 33/32"	77	77	77	75	68	64	60
	6' 6 3/4"	77	77	77	73	66	62	57
	6' 4 25/32"	77	77	77	71	64	60	57
	6' 2 13/16"	77	77	75	68	64	60	55
		Door weight in lbs.						

Maximum weights in lbs.

Hawa Configurator

www.hawa.com/configurator






List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997




Set consisting of:

	30996	30997	No.
 Slot nuts for hinge attachment, plastic, black	4	4	30686
 Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
 Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	4	31070
 Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
 Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
 Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
 Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
 Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 16 pieces, incl. Torx T20	1	1	31585
 Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
 Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

Suitable slide-in set

	No.
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Hawa Concepta III 25/35 Push, slide-in set, right	30999





Set consisting of:

	30998	30999	No.
 Hawa Concepta III 25/35 Push slide-in unit, left	1		31038
 End stop bracket for push ejector, steel, zinc-plated	1	1	52559
 Push ejector, plastic, black	1	1	52454
 Push-to-open with adapter plate, plastic, black	1	1	30838
 Hawa Concepta III Push set of cover caps, for left-hand stop, plastic, black	1		30818
 Hawa Concepta III 25/35 Push slide-in unit, right		1	31039
 Hawa Concepta III Push set of cover caps, for right-hand stop, plastic, black		1	30827

Uprights

	Nr.
 Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	560 (1' 10 1/16")	31005
	Connector set 55 mm (2 5/32"), exterior connection to cabinet, top	560 (1' 10 1/16")	31430
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, top	500 (1' 7 11/16")	31006
	Connector set 110 mm (4 11/32"), for two pivot/slide-in doors, bottom	500 (1' 7 11/16")	31246
	Connector 110 mm (4 11/32"), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32")	31007

Guides

	No.
	25680

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

		Nr.
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum	056.3192.072
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32" to 5' 9 7/8"), aluminum	056.3192.079


Aluminum, anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, anodized	056.3192.071
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, anodized	056.3192.082
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32" to 7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32")	056.3192.080




Aluminum, black anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32" to 7' 5 9/16"), aluminum, black anodized	056.3192.081


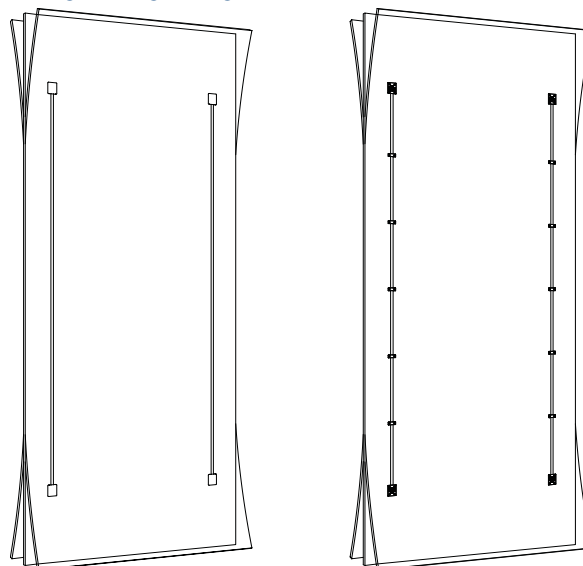
Straightening fitting



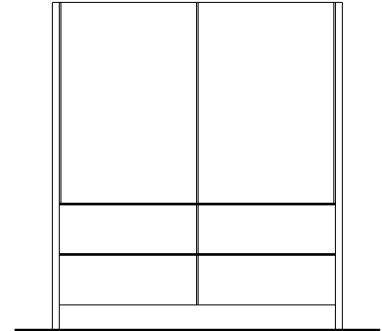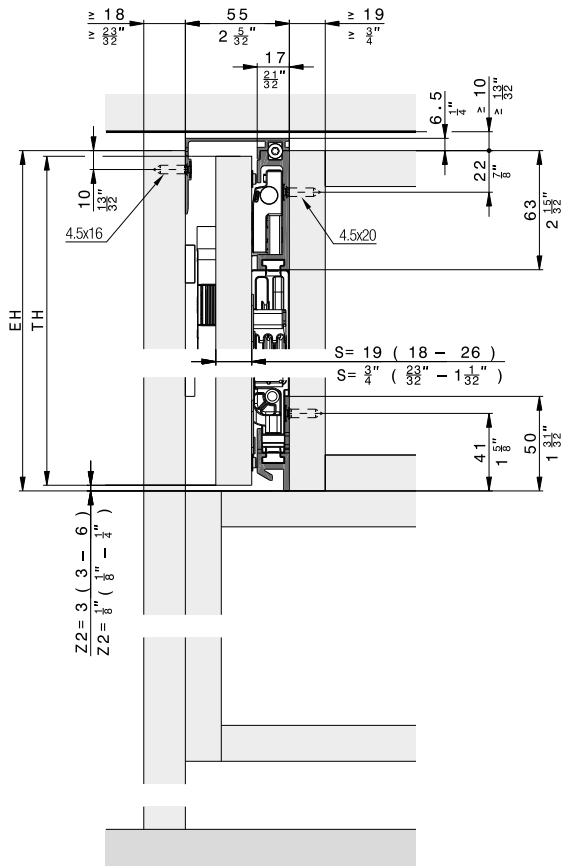Further installation examples Composed cabinet




Cabinet without base panel

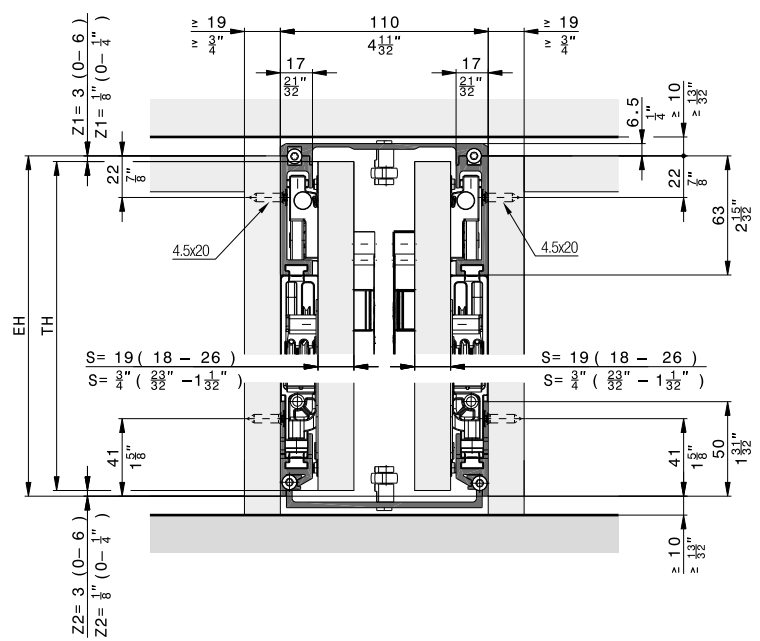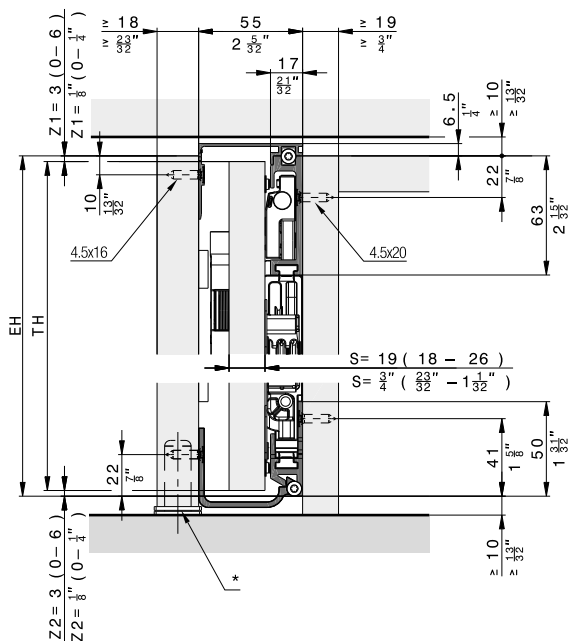


* Recommendation: Use adjustable foot

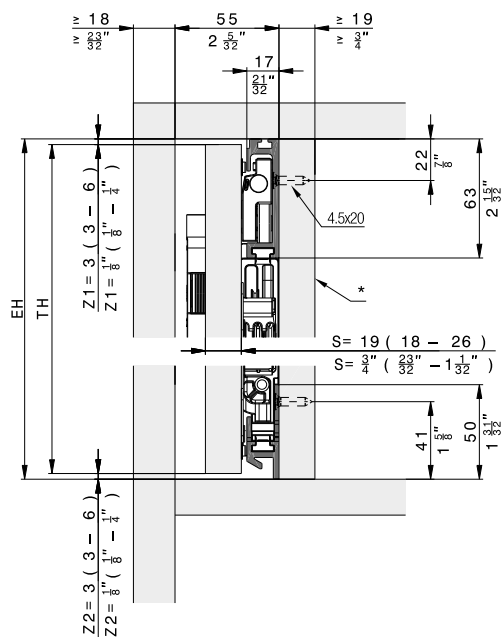
Inlaid doors



* removable

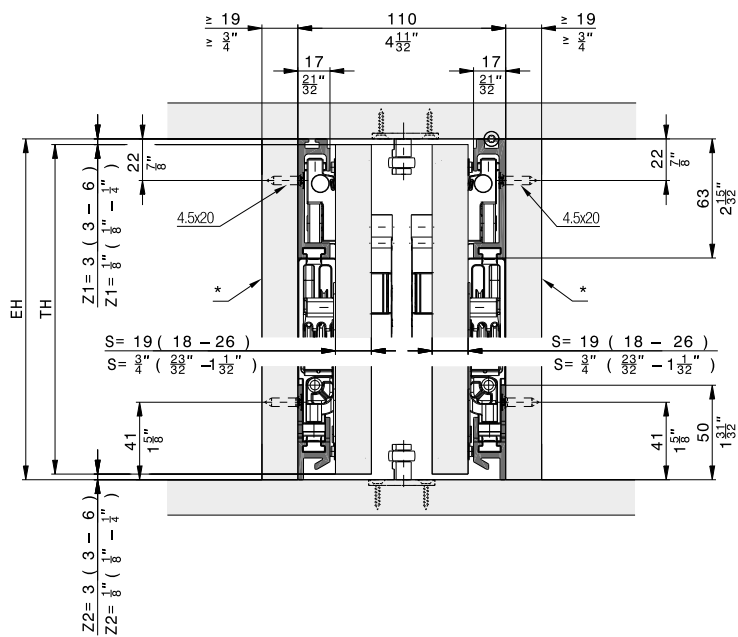


Floor-to-ceiling doors

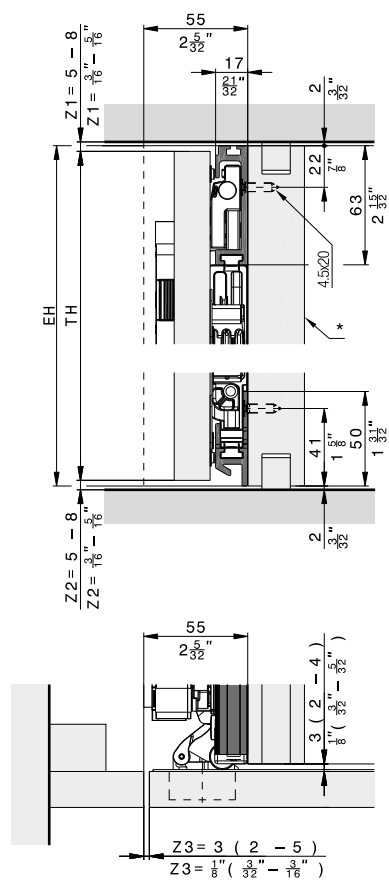

* removable

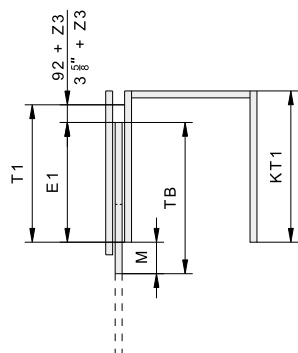
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 ⁵ / ₁₆ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₁₆ " + Z3 - M
E1	TB - M	TB - M
M	≥ S + 3 ≤ TB - 320	≥ S + ¹ / ₈ " ≤ TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door

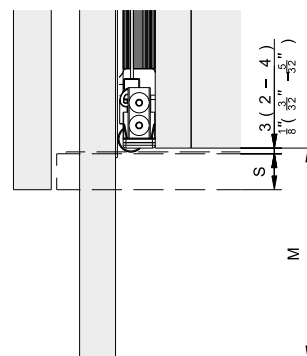

Instructions

Installation	→
Adjustment	→
Connector	→

Videos

Installation	→
Adjustment	→
Connector	→

Accessories

– Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

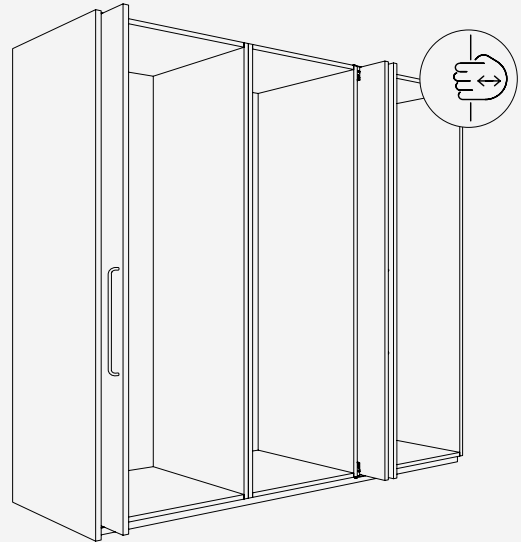
Hardware for pivoting and lateral sliding in of wooden doors up to 35 kg (77 lbs.). Uniform, flush front design with even gap pattern. Pull version with handle and integrated soft closing mechanism.

Product highlights

- Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
- Comfort** Ergonomic movement support for even, smooth movement
- Aesthetics** Allows constructions with and without handle – the technology remains invisible


Technical specifications

- 10–35 kg (22 to 77 lbs.)
- 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
- 440–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")





Installation examples

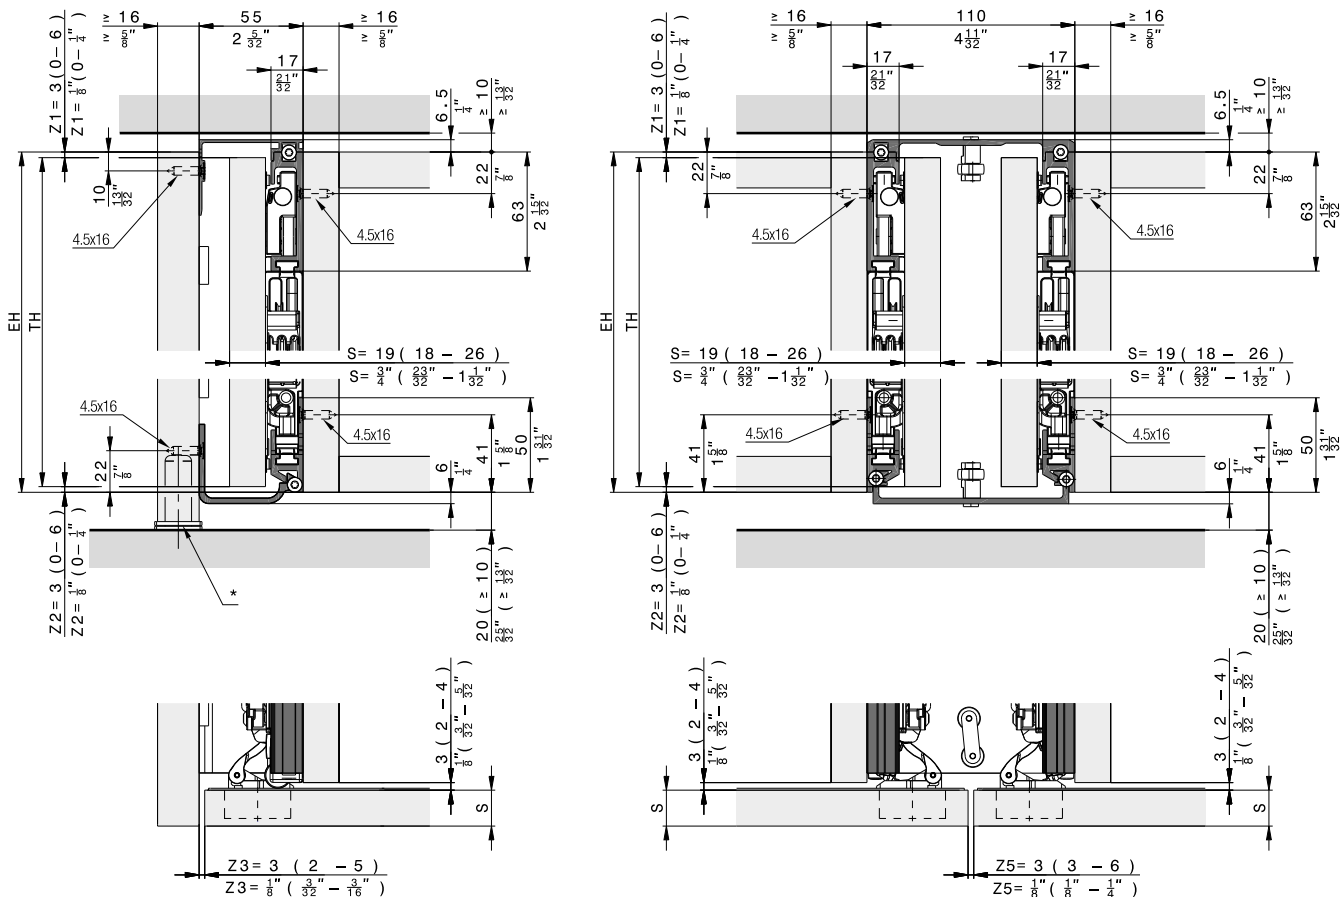Door striking against the top and bottom cabinet sections



* Recommendation: Use adjustable foot

Components required for one cabinet



Hawa Concepta III 35 Pull, left

No.	
30996	Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
31000	Hawa Concepta III 25/35 Pull, slide-in set, left
30771	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")

Hawa Concepta III 35 Pull, right

No.	
30997	Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
31001	Hawa Concepta III 25/35 Pull, slide-in set, right
30771	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm						
		440	500	550	600	650	700	750
Door height mm	2700	35	35	35	35	35	35	35
	2650	35	35	35	35	35	35	35
	2600	35	35	35	35	35	35	35
	2550	35	35	35	35	35	35	35
	2500	35	35	35	35	35	35	35
	2450	35	35	35	35	35	35	34
	2400	35	35	35	35	35	35	33
	2350	35	35	35	35	35	34	32
	2300	35	35	35	35	35	34	31
	2250	35	35	35	35	35	33	31
	2200	35	35	35	35	34	32	30
	2150	35	35	35	35	33	31	29
	2100	35	35	35	35	32	30	28
	2050	35	35	35	34	31	29	27
Maximum weights in kg	2000	35	35	35	33	30	28	26
	1950	35	35	35	32	29	27	26
	1900	35	35	34	31	29	27	25
	Door weight in kg							

		Door width in inch						
		1' 5 5/16"	1' 7 11/16"	1' 9 21/32"	1' 11 5/8"	2' 1 19/32"	2' 3 9/16"	2' 5 17/32"
Door height in inch	8' 10 5/16"	77	77	77	77	77	77	77
	8' 8 11/32"	77	77	77	77	77	77	77
	8' 6 3/8"	77	77	77	77	77	77	77
	8' 4 13/32"	77	77	77	77	77	77	77
	8' 2 7/16"	77	77	77	77	77	77	77
	8' 15/32"	77	77	77	77	77	77	75
	7' 10 1/2"	77	77	77	77	77	77	73
	7' 8 17/32"	77	77	77	77	77	75	71
	7' 6 9/16"	77	77	77	77	77	75	68
	7' 4 19/32"	77	77	77	77	77	73	68
	7' 2 5/8"	77	77	77	77	75	71	66
	7' 21/32"	77	77	77	77	73	68	64
	6' 10 11/16"	77	77	77	77	71	66	62
	6' 8 33/32"	77	77	77	75	68	64	60
Maximum weights in lbs.	6' 6 3/4"	77	77	77	73	66	62	57
	6' 4 25/32"	77	77	77	71	64	60	57
	6' 2 13/16"	77	77	75	68	64	60	55
	Door weight in lbs.							

Hawa Configurator




www.hawa.com/configurator



List of individual parts, which are included in the sets



Set for 1 pivot /slide-in door up to 35 kg (77 lbs.)

	No.
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997

		30996	30997	No.
Set consisting of:				
	Slot nuts for hinge attachment, plastic, black	4	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	4	31070
	Set for concealed hinges, 8 screws 4x16 mm (5/32"x5/8"), 3 door stop buffers	1	1	30811
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	2	2	30983
	Euro screw, 6x13 mm (1/4"x1/2"), steel, black, set of 6 pieces	1	1	30986
	Bottom guide track left, aluminum, anodized, L= 838 mm (2' 9")	1		30805
	Top running track left, aluminum, anodized, L= 838 mm (2' 9")	1		31059
	Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 16 pieces, incl. Torx T20	1	1	31585
	Bottom guide track right, aluminum, anodized, L= 838 mm (2' 9")		1	30806
	Top running track right, aluminum, anodized, L= 838 mm (2' 9")		1	31060

Suitable slide-in set





	No.
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Hawa Concepta III 25/35 Pull, slide-in set, right	31001

		31000	31001	No.
Set consisting of:				
	Hawa Concepta III 25/35 Pull slide-in unit, left	1		31040
	End stop bracket Pull, steel zinc-plated	1	1	31414
	Soft closing mechanism	1	1	31221
	Hawa Concepta III Pull set of cover caps, for left-hand stop, plastic, black	1		30964
	Hawa Concepta III 25/35 Pull slide-in unit, right		1	31041
	Hawa Concepta III Pull set of cover caps, for right-hand stop, plastic, black		1	30965

Uprights

		Nr.
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771

Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007

Guides

	No.
	25680

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

	Nr.
	056.3192.072
	056.3192.079


Aluminum, anodized

	No.
	056.3192.071
	056.3192.082
	056.3192.080




Aluminum, black anodized

	No.
	056.3192.074
	056.3192.075
	056.3192.081


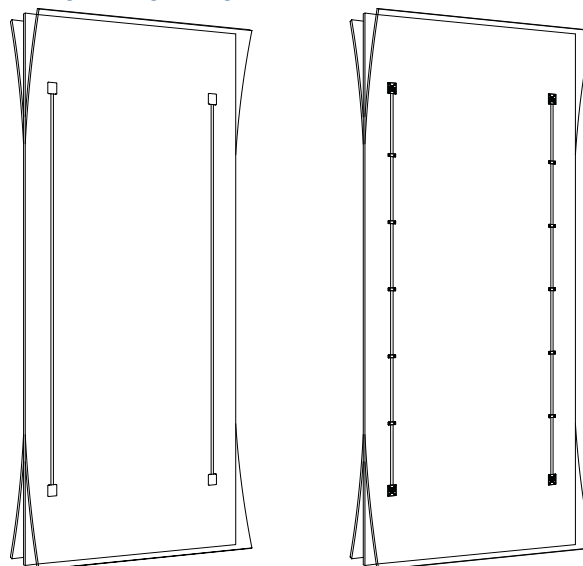
Straightening fitting



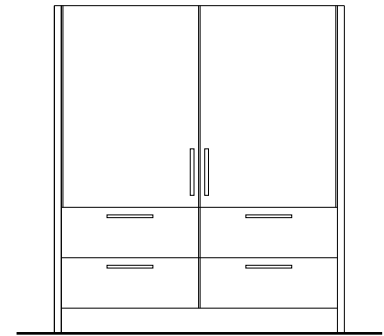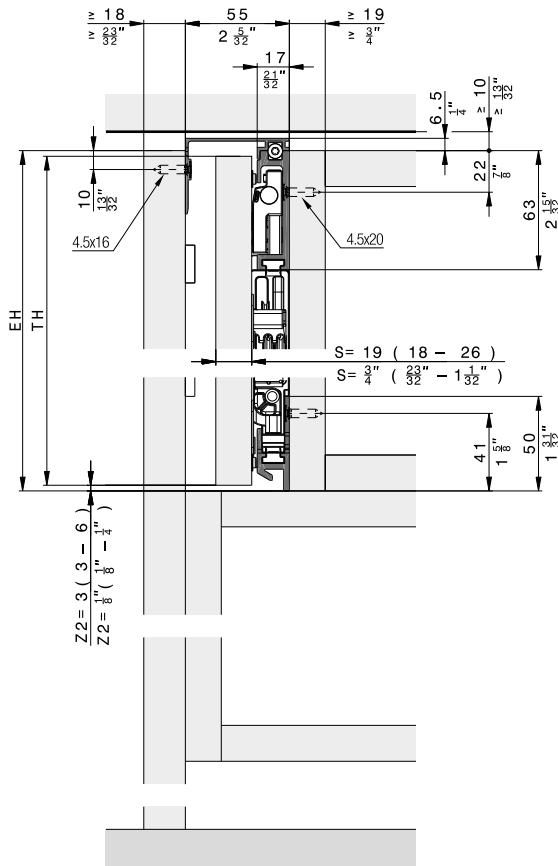Further installation examples Composed cabinet




Cabinet without base panel

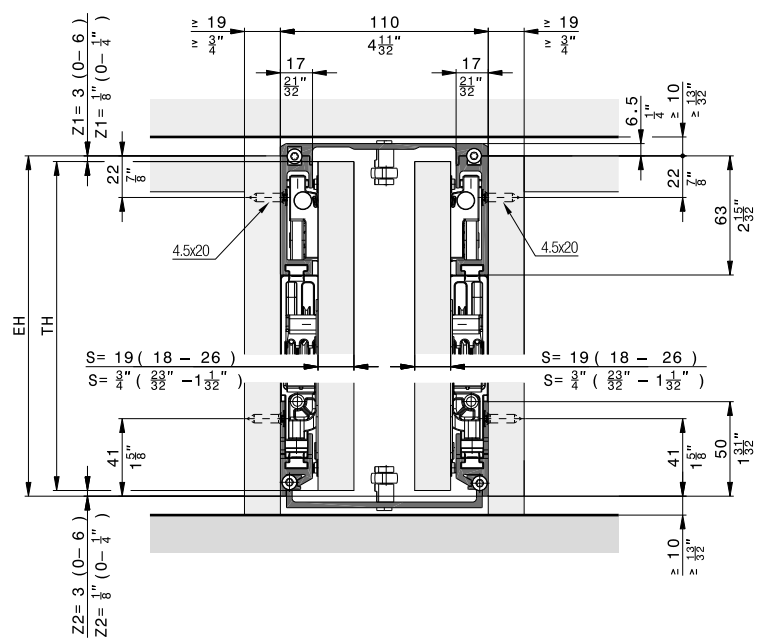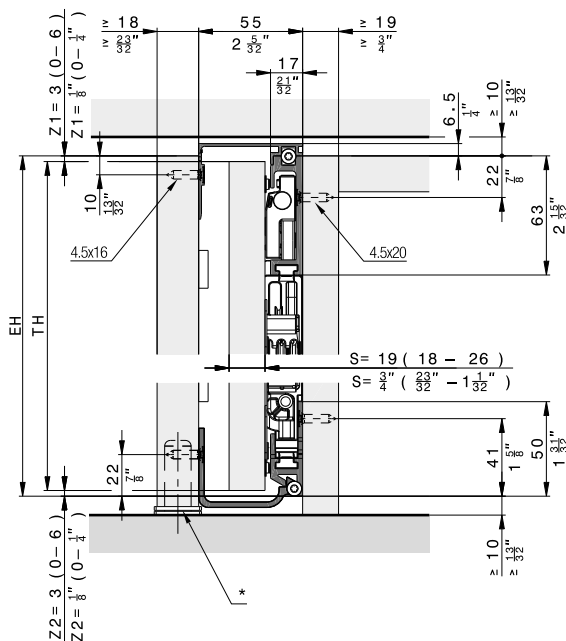


* Recommendation: Use adjustable foot

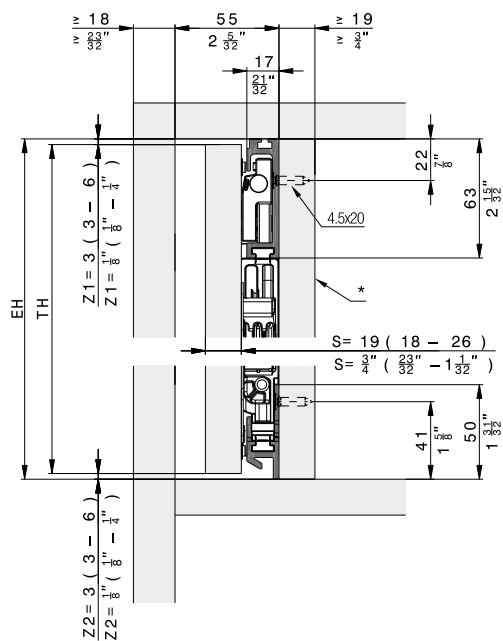
Inlaid doors



* removable

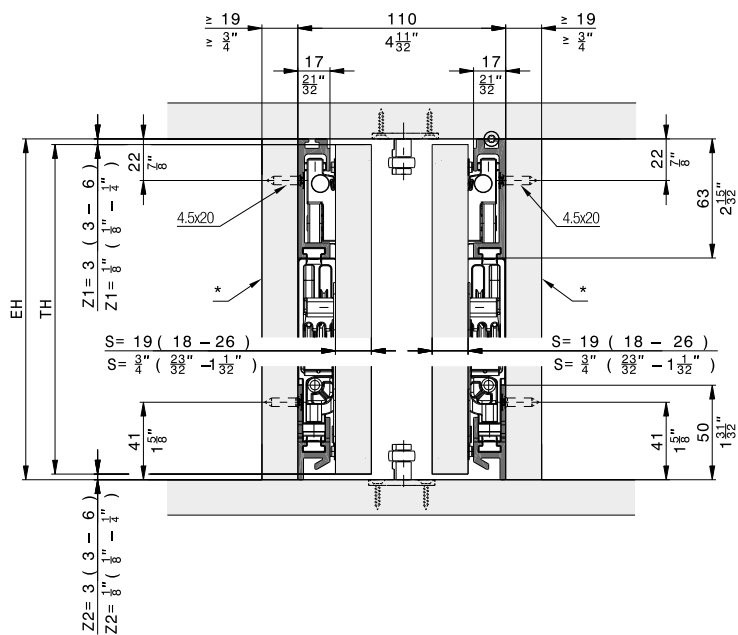


Floor-to-ceiling doors

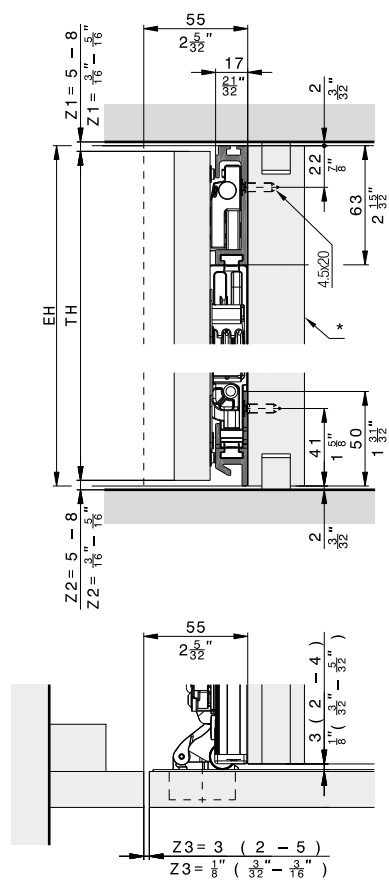

* removable

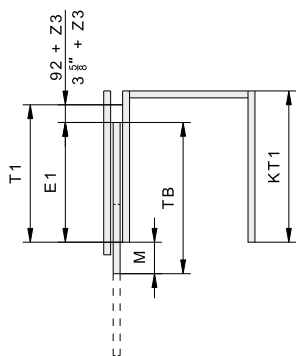
Hardware depth calculation




	mm	Inch
T1	≥ 414	≥ 1' 4 ⁵ / ₁₆ "

	mm	Inch
T1	TB + 92 + Z3 - M	TB + 3 ⁵ / ₁₆ " + Z3 - M
E1	TB - M	TB - M
M	≥ S + 3 ≤ TB - 320	≥ S + ¹ / ₈ " ≤ TB - 1 ¹⁹ / ₃₂ "

Door flush with outer face



Protruding door

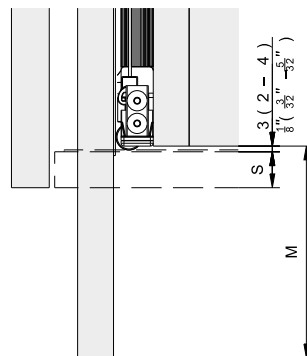

Instructions

Installation →

Adjustment →

Connector →

Videos

Installation →

Adjustment →

Connector →

Accessories

– Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

Hawa Folding Concepta III for wooden folding/slide-in doors

Folded doors give you even more design freedom

Pivoting doors, sliding them in at the side and parking them in the smallest of spaces: This is how the Hawa Concepta III family makes entire cabinet and kitchen units disappear and emerge again. And the Hawa Folding Concepta III even extends this movement sequence by another dimension by folding the doors beforehand. This leaves room for structures with a particularly large area, since 2 pairs of doors make it possible to have cabinet fronts measuring up to 3000 mm wide and 2700 mm high. Operation is just as intuitive as it is with every Hawa Concepta III system: A tap is sufficient to open the door and initiate the movement sequence – everything else takes place almost automatically. The Hawa Folding Concepta III is also based on the typical qualities of the hardware family: Versions with and without handles, height and width variations, a high degree of pre-assembly – allowing you to work, live and enjoy life.



Area of application

Variable, multi-functional use of rooms, such as for home offices which disappear behind doors, cabinet fronts which conceal a kitchen, or utility rooms or store rooms which are designed as walk-in cabinets.

System advantages

-  **Flexibility** Variable door dimensions: **Floor-to-ceiling solutions** are possible, **also as walk-in solutions**
Can be combined with Hawa Concepta III, for three-door solutions without a separating wall
-  **Productivity** **Easy installation** thanks to high degree of pre-assembly
Intuitive adjustment with easily accessible adjustment points
-  **Comfort** **No obstruction** by protruding doors
Opening and closing with **minimal force – one hand is enough**
-  **Aesthetics** Allows constructions **with and without handle** – the **technology** remains **invisible**
Uniform, **flush front design** with even gap pattern

Technical specifications


	max.	20/25 kg
		1200 – 2700 mm
		440 – 750 mm
		18 – 26 mm

Good to know (accessories)


- Straightening fitting for doors
- Reinforcement profile for stability
- Base profile set

Installation examples

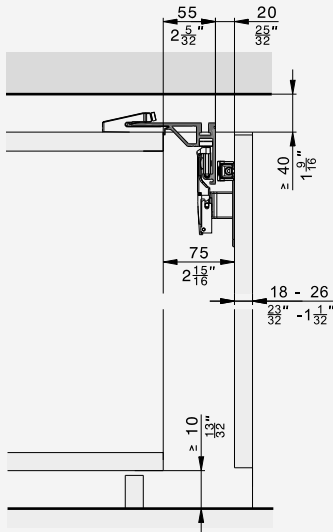
Hawa Folding Concepta III 20/25 Push




Overlay door without base profile




Hawa Folding Concepta III 20/25 Push

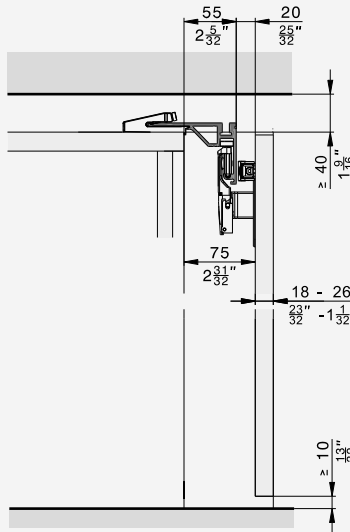


Floor-to-ceiling doors without base panels



Hawa Folding Concepta III 20/25 Pull

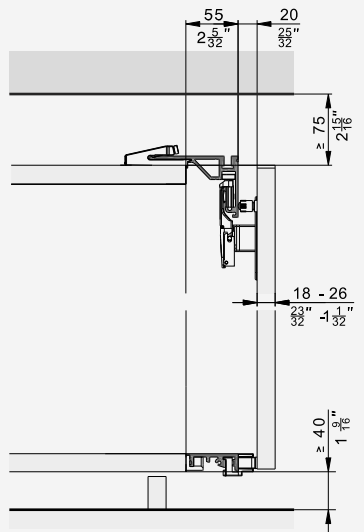

Overlay door with base profile in conjunction with Hawa Concepta III 25/35 Pull




Hardware for pivoting, folding and lateral sliding in of wooden doors up to 20 kg (44 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights

-  **Flexibility** Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III
-  **Productivity** Easy installation thanks to high degree of pre-assembly and intuitive adjustment
-  **Aesthetics** Cabinet designs without handle – the technology remains invisible



Technical specifications

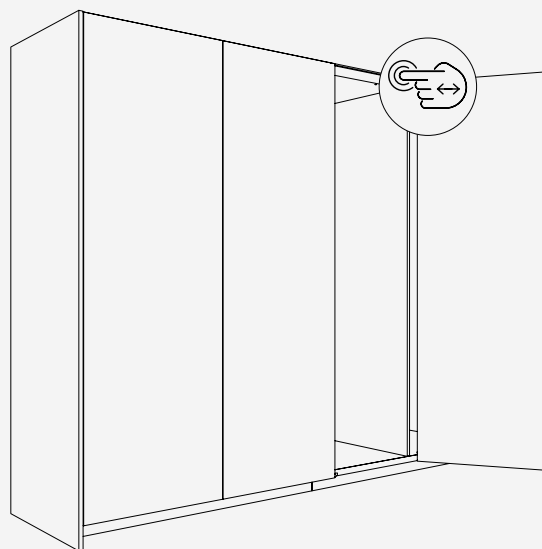-  6–20 kg (13 to 44 lbs.)
-  1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
-  440–750 mm (1' 5 5/16" to 2' 5 17/32")
-  18–26 mm (23/32" to 1 1/32")




Installation examples

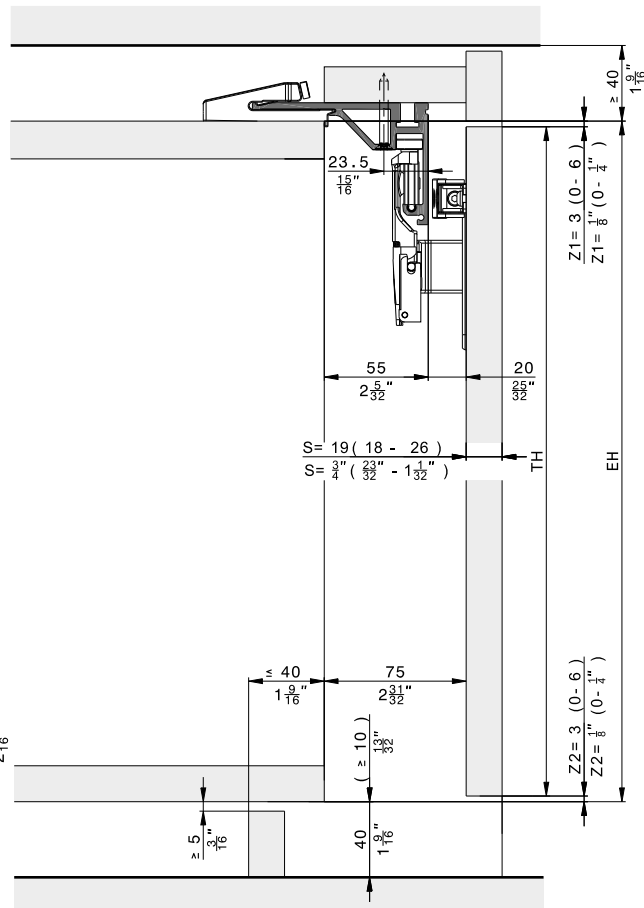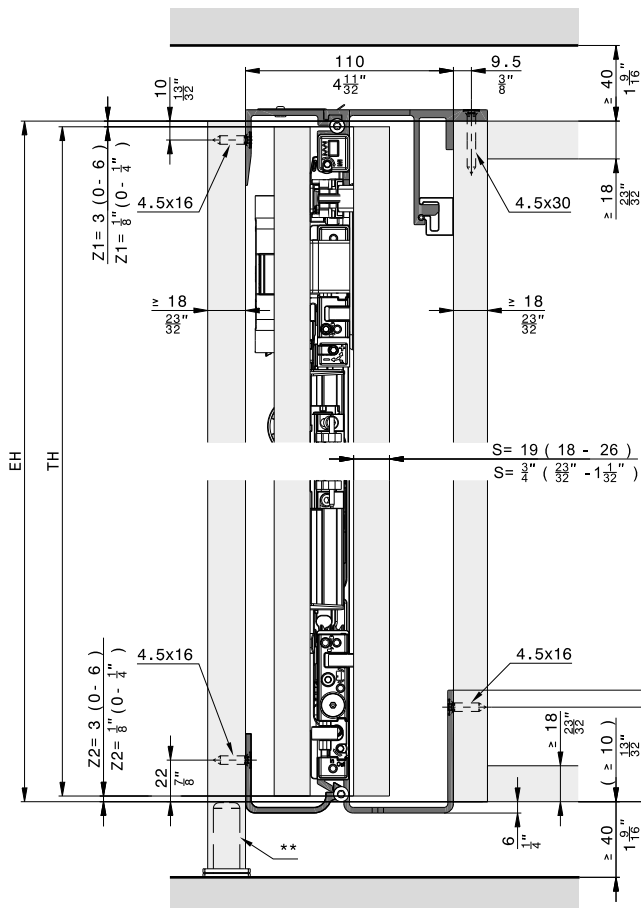Overlay door without base profile




** Recommendation: Use adjustable foot

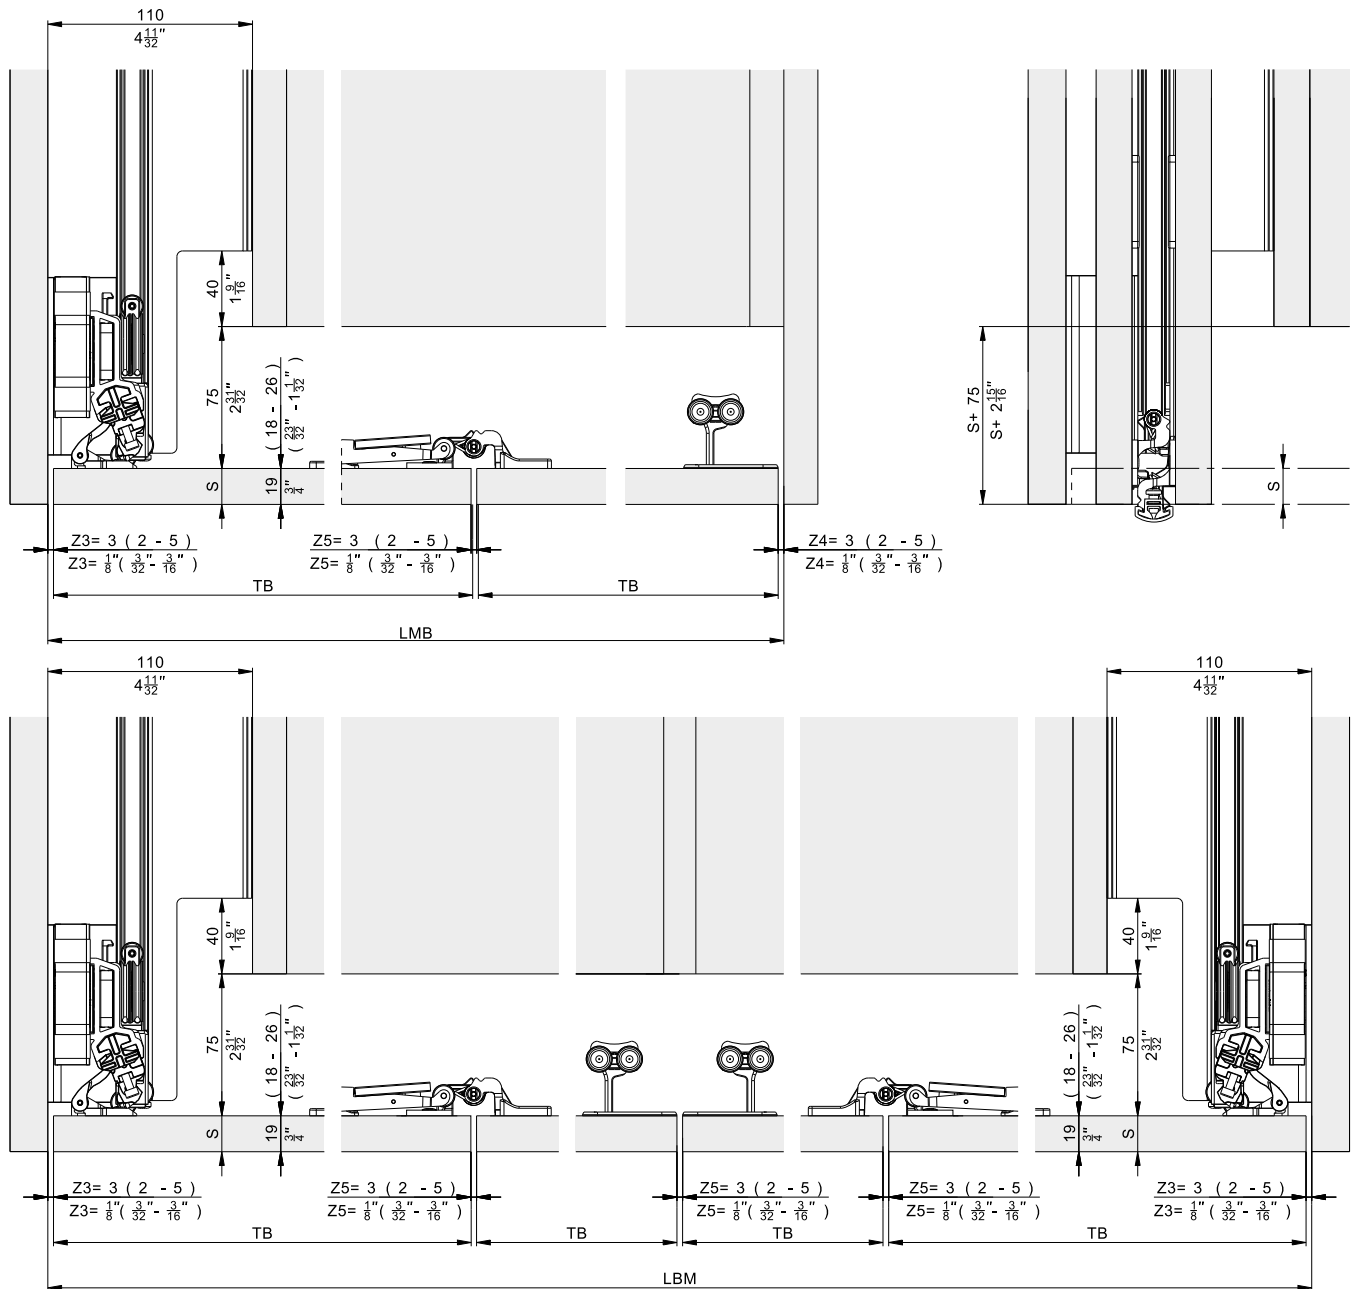Overlay door without base profile, 2 and 4 doors



Required components

for 2-door cabinets




Hawa Folding Concepta III 20 Push, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526



Hawa Folding Concepta III 20 Push, right


Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

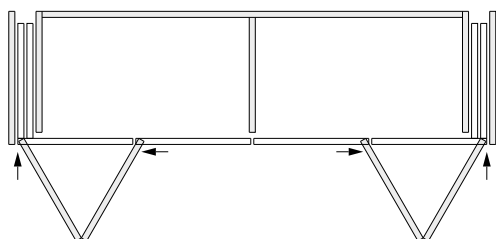for 4-door cabinets




Hawa Folding Concepta III 20 Push, left/right

Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	1	31508
Hawa Folding Concepta III 20 Push, slide-in set, right	1	31509
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	2	31519

Aluminum, black anodized


	Pcs.	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	1	31508
Hawa Folding Concepta III 20 Push, slide-in set, right	1	31509
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	2	31526

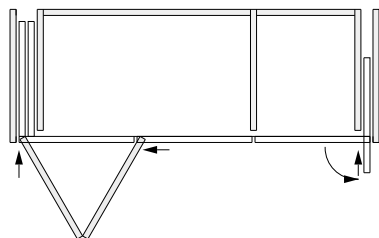for 3-door cabinets

**Hawa Folding Concepta III 20 Push, left with
Hawa Concepta III 25 Push, right**
Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

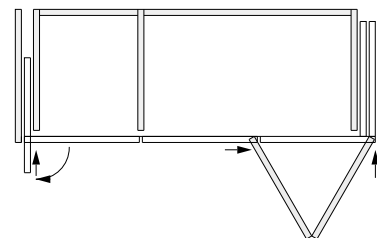Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, left	31508
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


**Hawa Folding Concepta III 20 Push, right with
Hawa Concepta III 25 Push, left**
Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31504
Hawa Folding Concepta III 20 Push, slide-in set, right	31509
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005




Hawa Configurator
www.hawa.com/configurator →

List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 20 kg (44 lbs.)

		No.	
Hawa Folding Concepta III 20 Push, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")		31504	
		31504	No.
Set consisting of:			
	Slot nuts for hinge attachment, plastic, black	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, without soft closing mechanism and closing spring, steel, nickel plated	3	31435
	Center concealed hinge, spring loaded, steel, matt nickel-plated	3	30794
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 20 pieces	1	31532
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Screw set for Push-to-open and folding door soft closing mechanism	1	31531
	Folding door soft closing mechanism	1	31064
	Push-to-open for folding door	1	31332
	Counterplate for Push-to-open folding door, plastic, black	1	31036
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530







Suitable slide-in set

		No.	
Hawa Folding Concepta III 20 Push, slide-in set, left		31508	
Hawa Folding Concepta III 20 Push, slide-in set, right		31509	
		31508	No.
Set consisting of:			
	Slide-in unit Hawa Folding Concepta III 20 Push, left	1	31448
	End stop bracket for Push ejector, steel, zinc-plated	1	52560
	Push ejector, plastic, black	1	52454
	Slide-in securing mechanism, plastic, black	1	30966
	Adhesive plate for Push-to-open folding door, with double-sided adhesive tape, silver-gray and black	1	52118
	Slide-in unit Hawa Folding Concepta III 20 Push, right	1	31450

Suitable 2-door and 4-door track sets, aluminum, anodized






	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting of:

		31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, anodized		1	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343

Upright set, aluminum, anodized








	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

		31519	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 2200 mm (7' 2 5/8")	1	31230
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Suitable 3-door track sets, aluminum, anodized




	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting of:

	31516	31517	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, anodized, L= 1954 mm (6' 4 15/16")	1	1	31341
 Running track curve, left, aluminum, anodized	1		31365
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340

Continued table on next column

Table continued from previous column

	Running track curve, right, aluminum, anodized	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")	1	31371

Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

		31521	31522	31525	No.
Set consisting of:					
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized






	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

		31526	No.
Set consisting of:			
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized, L= 2200 mm (7' 2 5/8")	1	31231
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502

Suitable 3-door track sets, aluminum, black anodized




	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting of:


	31523	31524	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
 Running track curve, left, aluminum, black anodized	1		31367
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Cover-up pen for cut edge, black	1	1	52117

Continued table on next column







Table continued from previous column

 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
 Running track curve, right, aluminum, black anodized	1	31368
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
 Connector, top right, L= 788 mm (2' 7 1/32")	1	31371


Reinforcement profiles

	No.
 Reinforcement profile for running track front, 2765 mm (9' 27/32"), 4 doors, aluminum, anodized	52109
 Reinforcement profile for running track front, 2085 mm (6' 10 3/32"), 3 doors, aluminum, anodized	52110

Base profiles

	No.
 Base profile set, 2 doors, aluminum, anodized	52089
 Base profile set, 3 doors, aluminum, anodized	52090
 Base profile set, 4 doors, aluminum, anodized	52091
 Base profile set, 2 doors, aluminum, black anodized	52092
 Base profile set, 3 doors, aluminum, black anodized	52093
 Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
 Routing jig for folding hinge	52121
 Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting

→ Details under accessories from page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32" to 5' 9 7/8"), aluminum	056.3192.079
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32" to 5' 9 7/8"), aluminum, can be shortened for doors smaller 1215 mm (3'11 27/32")	056.3192.073

Aluminum, anodized

		Nr.
	Straightening fitting for doors 1715–2275 mm (5' 7 17/32" to 7' 5 9/16"), aluminum, anodized, can be shortened for doors smaller 1715 mm (5' 7 17/32")	056.3192.080

Aluminum, black anodized


		No.
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32" to 7' 5 9/16"), aluminum, black anodized	056.3192.081
	Straightening fitting for doors 1215–1775 mm (3' 11 27/32" to 5' 9 7/8"), aluminum, black anodized, can be shortened for doors smaller 1215 mm (3'11 27/32")	056.3192.076

Automatic shut-off device


In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.

www.halemeier.de

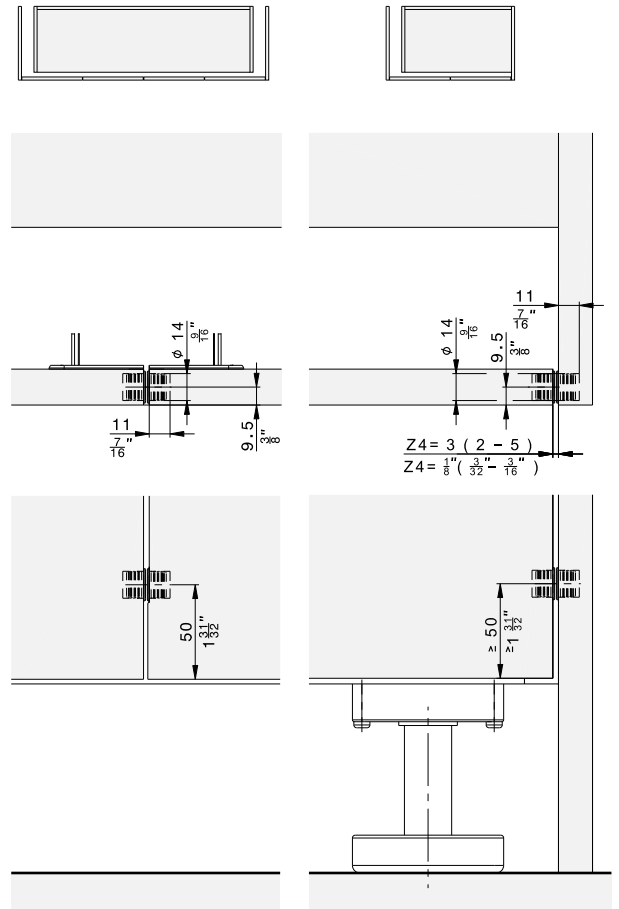Centering parts



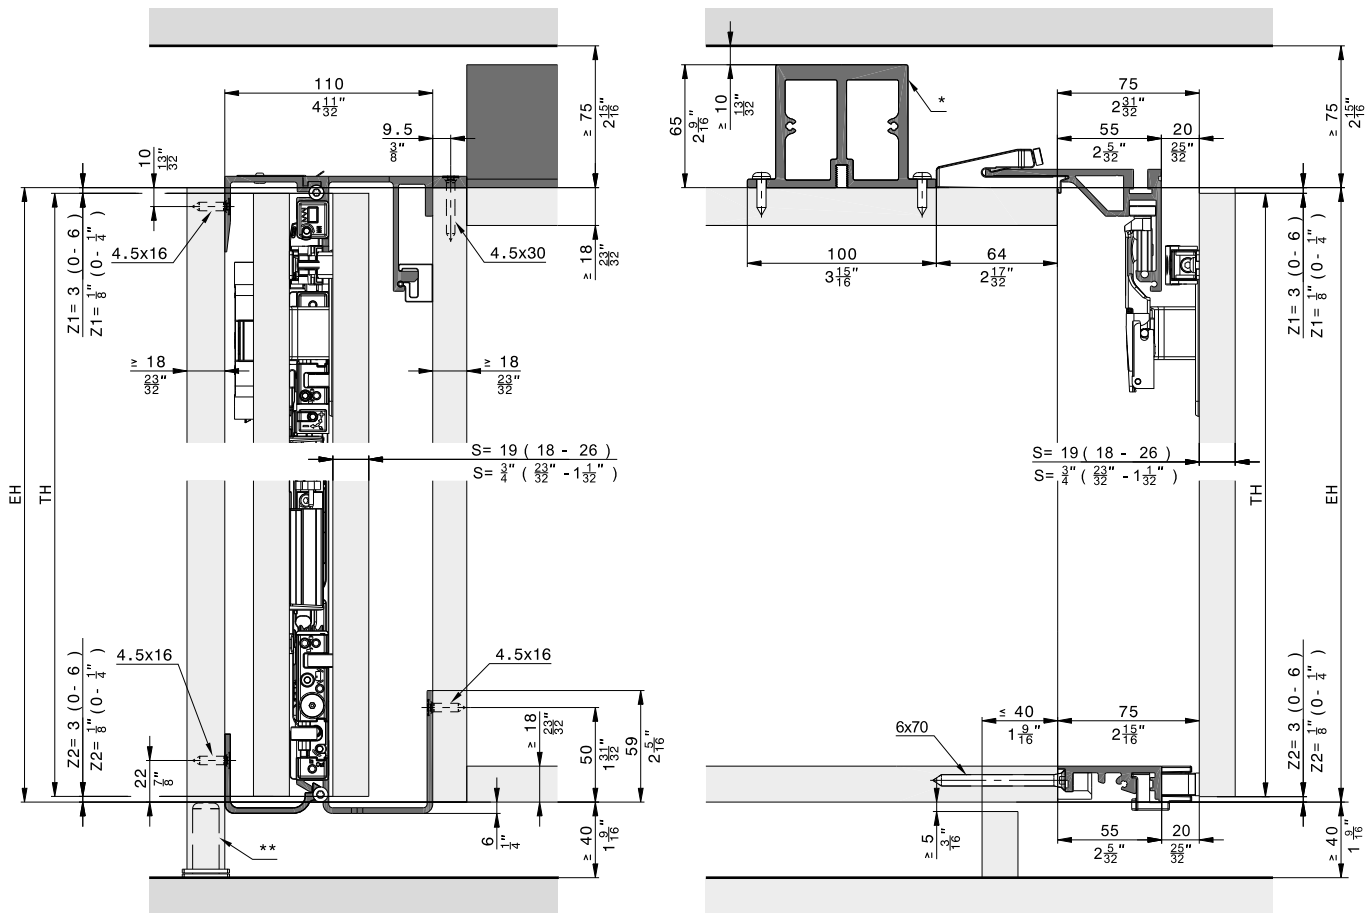
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls

**** Recommendation: Use adjustable foot**

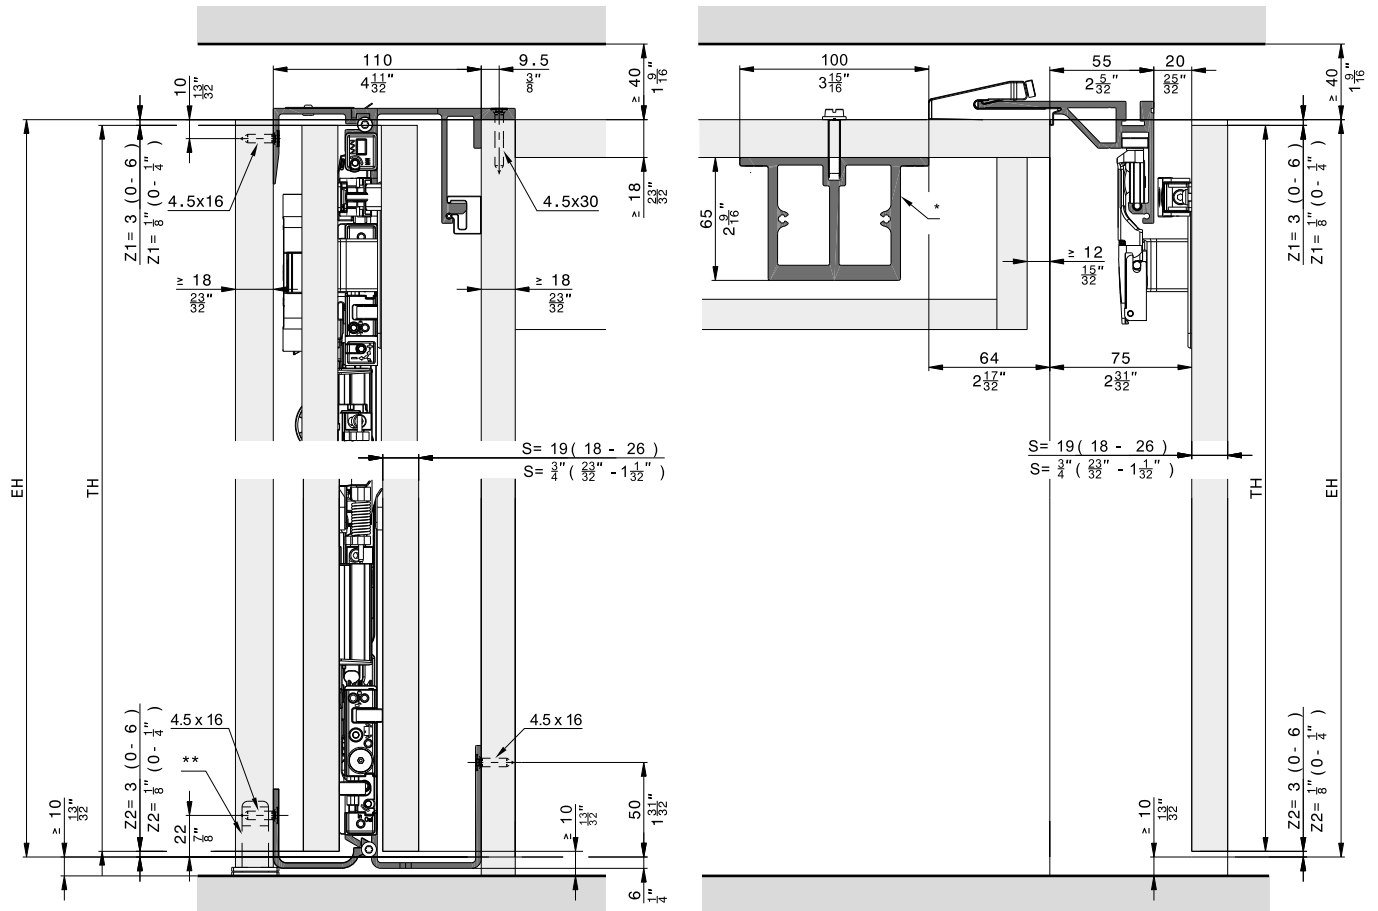
Floor-to-ceiling doors without base panels, 2 doors and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls


** Recommendation: Use adjustable foot

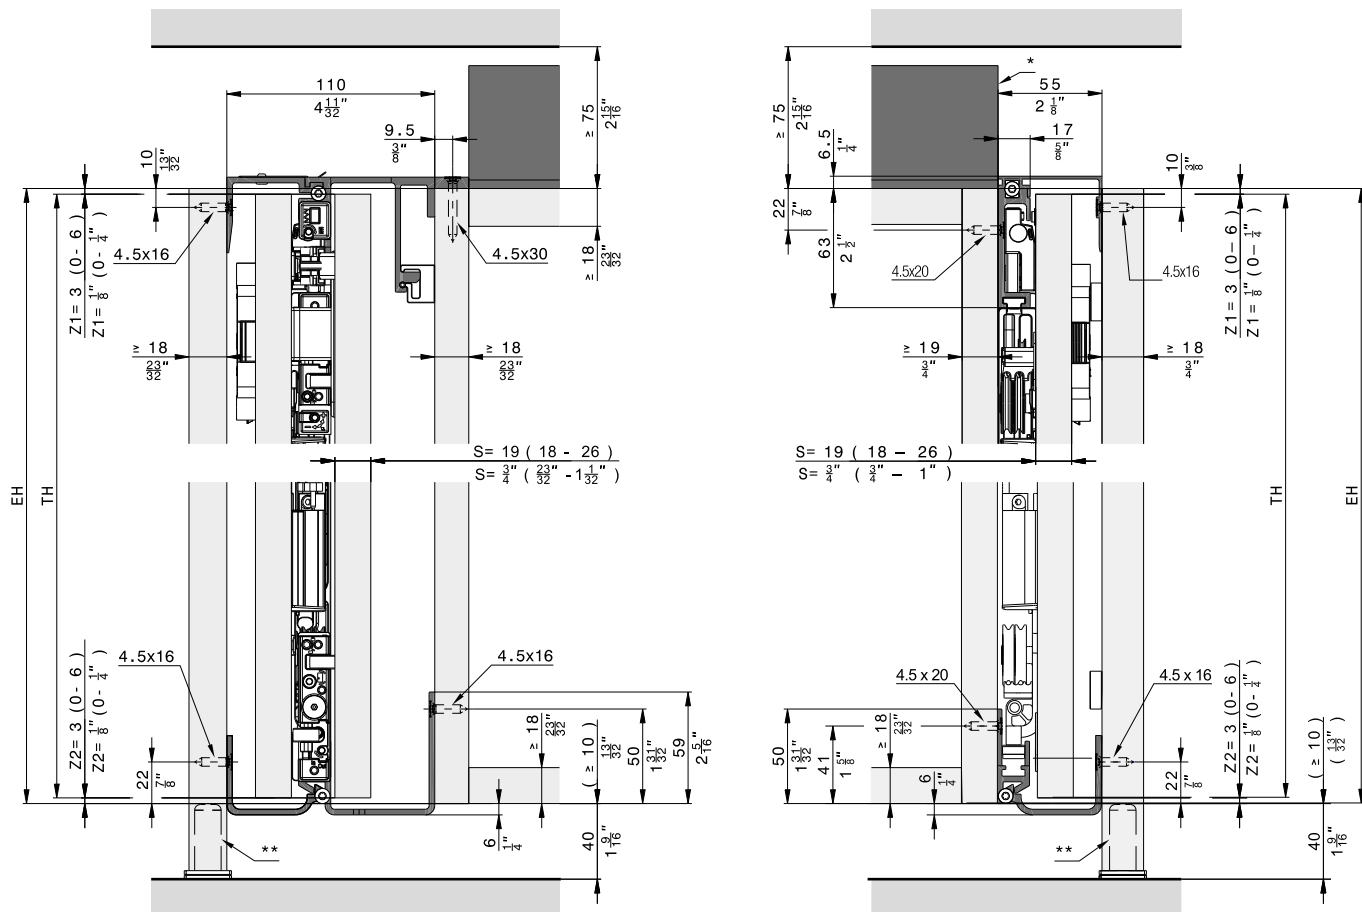Overlay door without base profile, 3 doors




* Reinforcement profile for 3-door and 4-door systems without separating walls

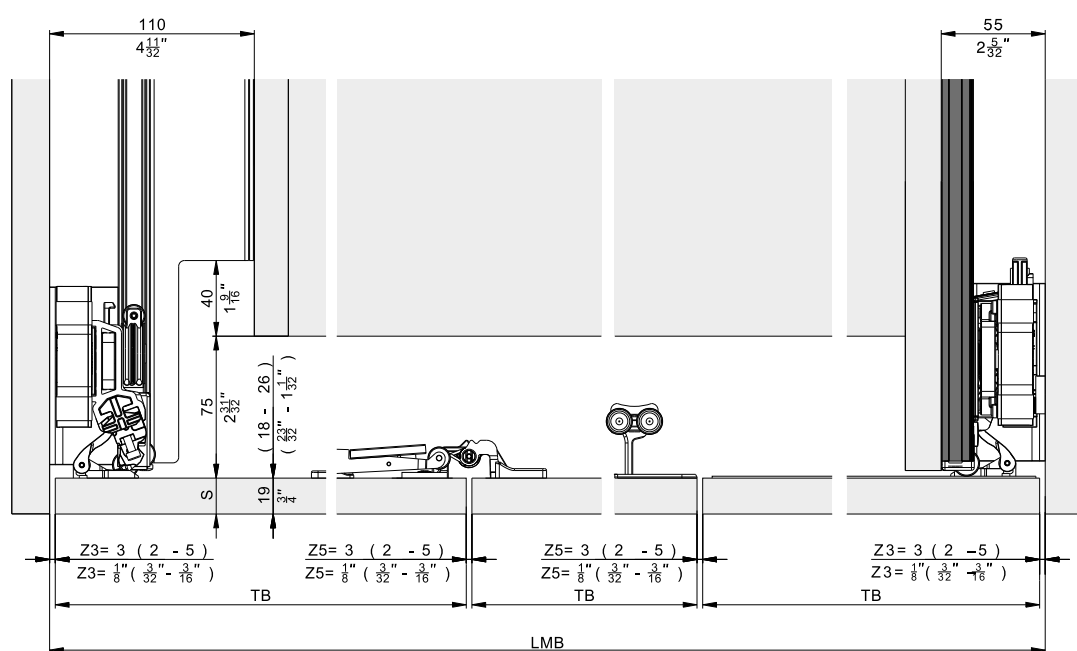** Recommendation: Use adjustable foot




Hardware depth calculation


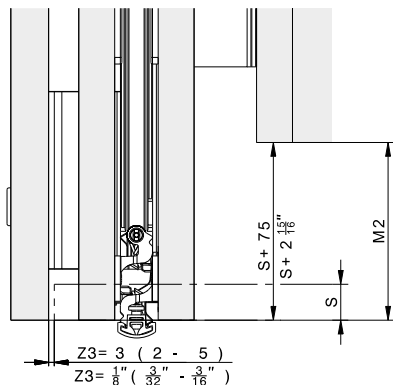
Flush door



Protruding door

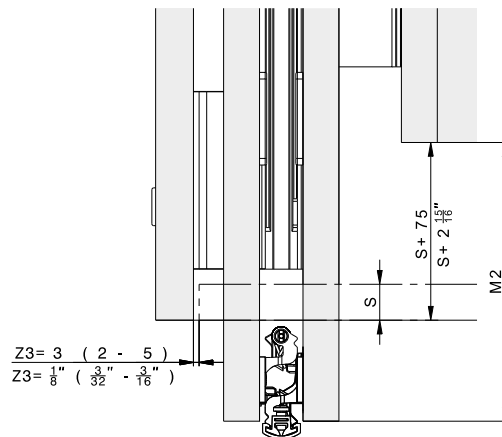

	mm	Inch
T2	TB + 92 + Z3 - M2	TB + 3 $\frac{5}{8}$ " + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 $\frac{15}{16}$ "
M2 max.	≤ TB - 250	≤ TB - 9 $\frac{27}{32}$ "

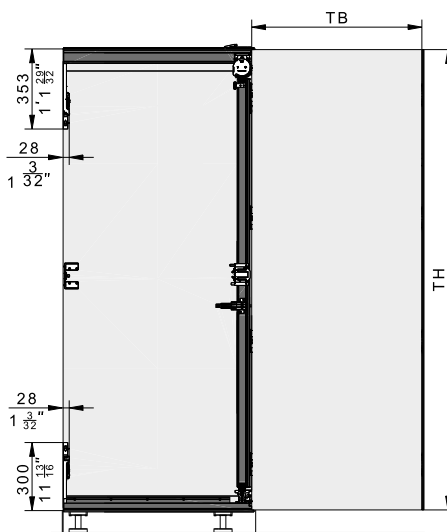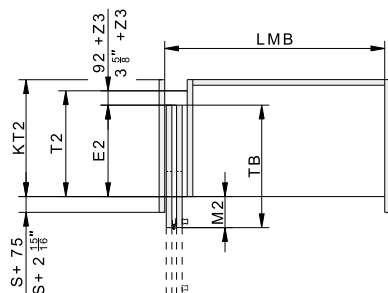

- S = Door thickness
- Z = Gap size
- E2 = Slide-in depth
- T2 = Hardware depth
- TB = Door width
- TH = Door height
- KT2 = Cabinet depth
- LMB = Inside clearance
- M2 = Door projection over cabinet

Installation



Adjustment



Installation



Adjustment



Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.


Hardware for pivoting, folding and lateral sliding in of wooden doors up to 20 kg (44 lbs.). Uniform, flush front design with even gap pattern. Invisible technology. Pull version with handle.

Product highlights

- Flexibility** Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III
- Productivity** Easy installation thanks to high degree of pre-assembly and intuitive adjustment
- Comfort** Opening and closing with very little effort – one hand is enough


Technical specifications

	6–20 kg (13 to 44 lbs.)
	1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
	440–750 mm (1' 5 5/16" to 2' 5 17/32")
	18–26 mm (23/32" to 1 1/32")

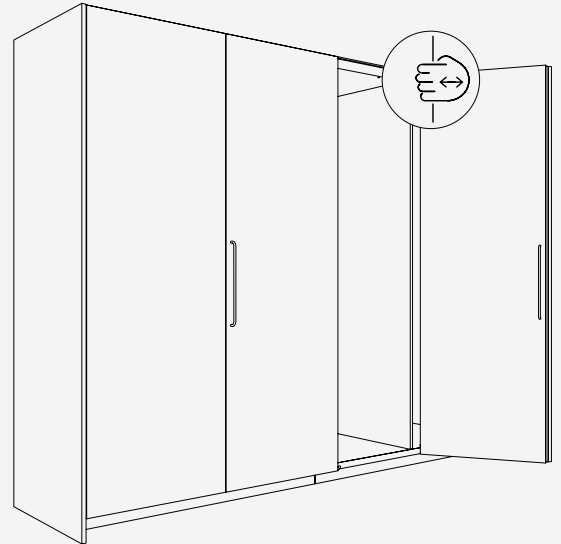


Installation examples

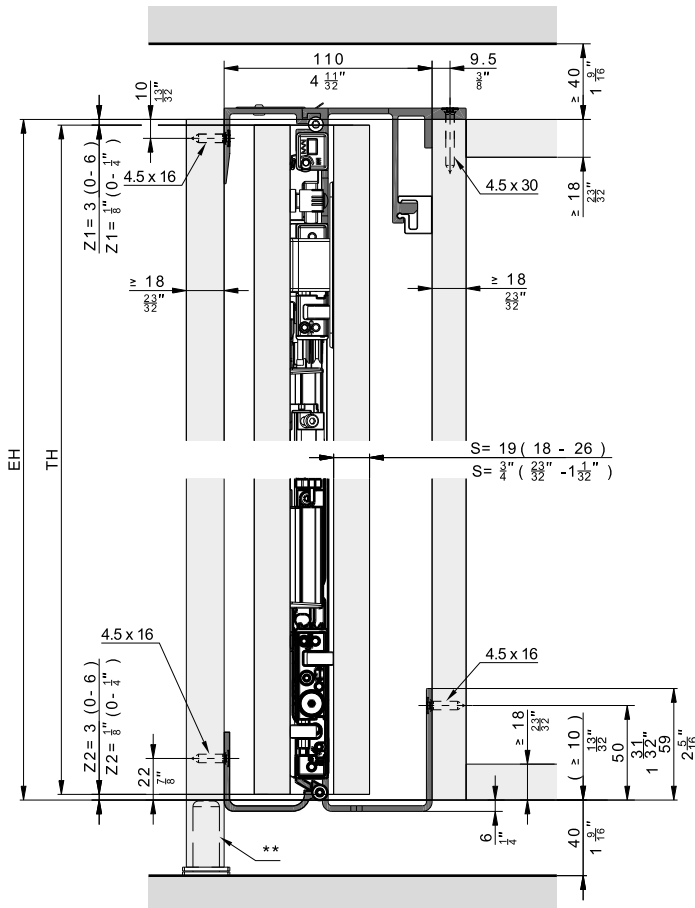
Overlay door without base profile



** Recommendation: Use adjustable foot

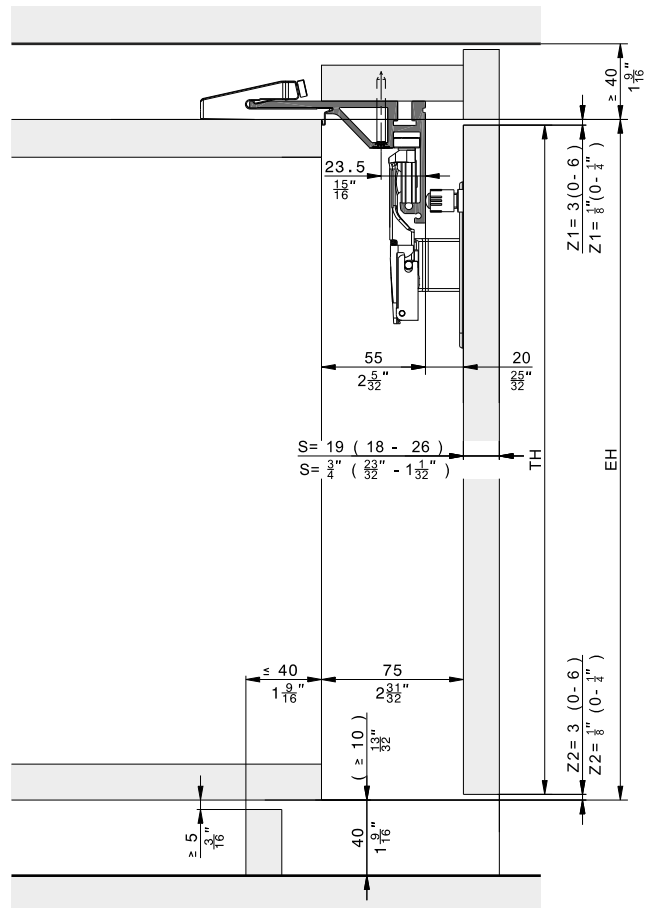


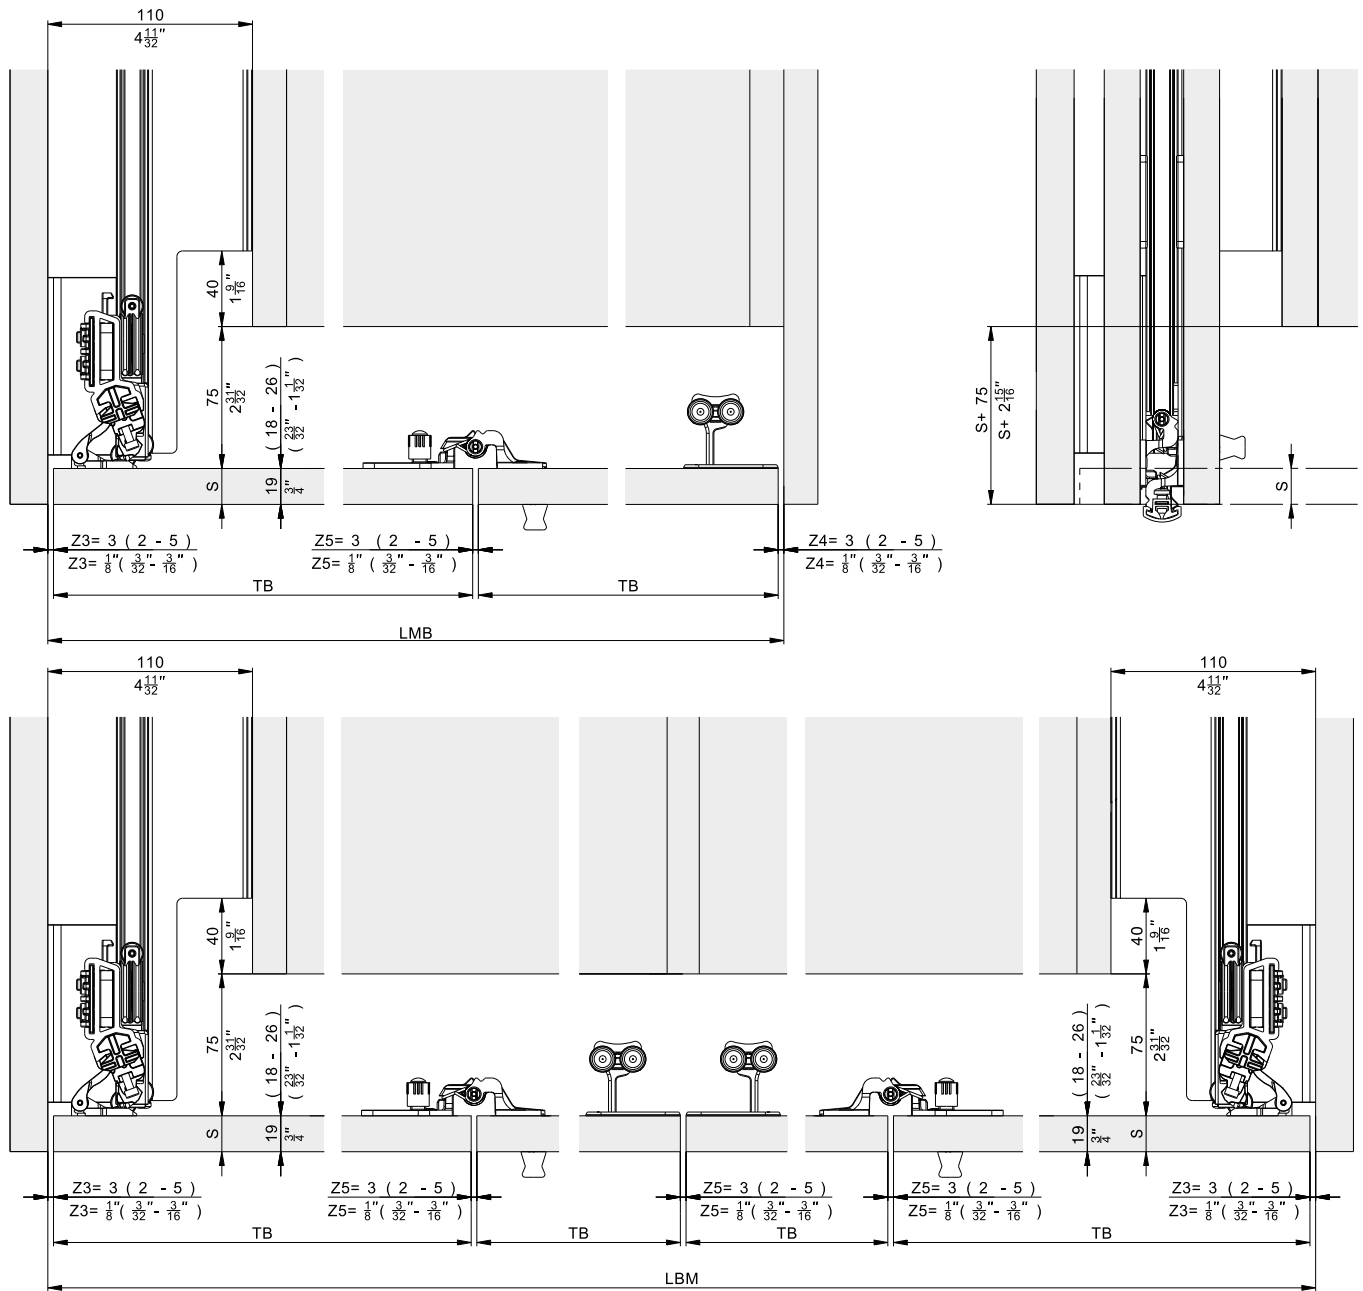Overlay door without base profile, 2 and 4 doors



Required components

for 2-door cabinets




Hawa Folding Concepta III 20 Pull, left
Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526




Hawa Folding Concepta III 20 Pull, right
Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

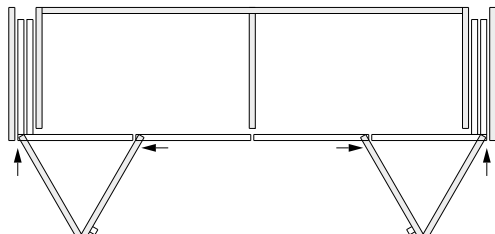for 4-door cabinets




Hawa Folding Concepta III 20 Pull, left/right
Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	2	31519

Aluminum, black anodized


	Pcs.	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	2	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	2	31526

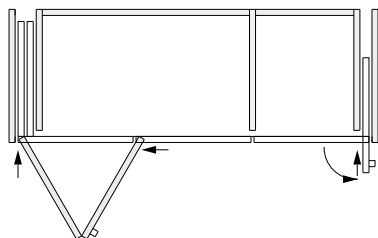for 3-door cabinets

**Hawa Folding Concepta III 20 Pull, left with
Hawa Concepta III 25 Pull, right**
Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

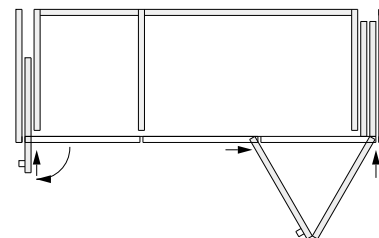Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30995
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


**Hawa Folding Concepta III 20 Pull, right with
Hawa Concepta III 25 Pull, left**
Aluminum, anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


Aluminum, black anodized

	No.
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	31506
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526
Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")	30994
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	30778
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005



Hawa Configurator
www.hawa.com/configurator →

List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 20 kg (44 lbs.)

		No.	
Hawa Folding Concepta III 20 Pull, basic set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")		31506	
		31506	No.
Set consisting of:			
	Slot nuts for hinge attachment, plastic, black	3	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	3	31070
	Center concealed hinge, not spring loaded, steel, matt nickel-plated	3	31362
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 20 pieces	1	31532
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Soft closing mechanism	1	31222
	Stop buffer adjustable, plastic, anthracite	1	31550
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530

Suitable slide-in set

		No.	
Hawa Folding Concepta III 20/25 Pull, slide-in set, left		31512	
Hawa Folding Concepta III 20/25 Pull, slide-in set, right		31513	
		31512	No.
Set consisting of:			
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, left	1	31004
	Pull end stop bracket, steel, zinc-plated	1	31541
	Slide-in securing mechanism, plastic, black	1	30966
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, right	1	31046

Suitable 2-door and 4-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting of:

		31514	31515	31518	No.
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, anodized		1	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343

Upright set, aluminum, anodized






	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized	31519

Set consisting of:

		31519	No.
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 2200 mm (7' 2 5/8")	1	31230
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502




Suitable 3-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

	31516	31517	No.
Set consisting of:			
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, anodized, L= 1954 mm (6' 4 15/16")	1	1	31341
 Running track curve, left, aluminum, anodized	1		31365
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340







Continued table on next column

Table continued from previous column

 Running track curve, right, aluminum, anodized	1	31366
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
 Connector, top right L= 788 mm (2' 7 1/32")	1	31371





Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

		31521	31522	31525	No.
Set consisting of:					
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344







Upright set, aluminum, black anodized

	No.
Hawa Folding Concepta III 20, upright set, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized	31526

		31526	No.
Set consisting of:			
	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")	1	30778
	Cover panel for door joint, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, black anodized, L= 2200 mm (7' 2 5/8")	1	31231
	Retaining clip for cover panel 2200 mm (7' 2 5/8"), plastic, black, set of 6 pieces	1	31502



Suitable 3-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524


	31523	31524	No.
Set consisting of:			
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
 Running track curve, left, aluminum, black anodized	1		31367
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Cover-up pen for cut edge, black	1	1	52117

Continued table on next column




Table continued from previous column

 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
 Running track curve, right, aluminum, black anodized	1	31368
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
 Connector, top right, L= 788 mm (2' 7 1/32")	1	31371


Reinforcement profiles

	No.
 Reinforcement profile for running track front, 2765 mm (9' 27/32"), 4 doors, aluminum, anodized	52109
 Reinforcement profile for running track front, 2085 mm (6' 10 3/32"), 3 doors, aluminum, anodized	52110


Base profiles

	No.
 Base profile set, 2 doors, aluminum, anodized	52089
 Base profile set, 3 doors, aluminum, anodized	52090
 Base profile set, 4 doors, aluminum, anodized	52091
 Base profile set, 2 doors, aluminum, black anodized	52092
 Base profile set, 3 doors, aluminum, black anodized	52093
 Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
 Routing jig for folding hinge	52121
 Magnetic centering part, with including drilling jig, aluminum, anodized	24006


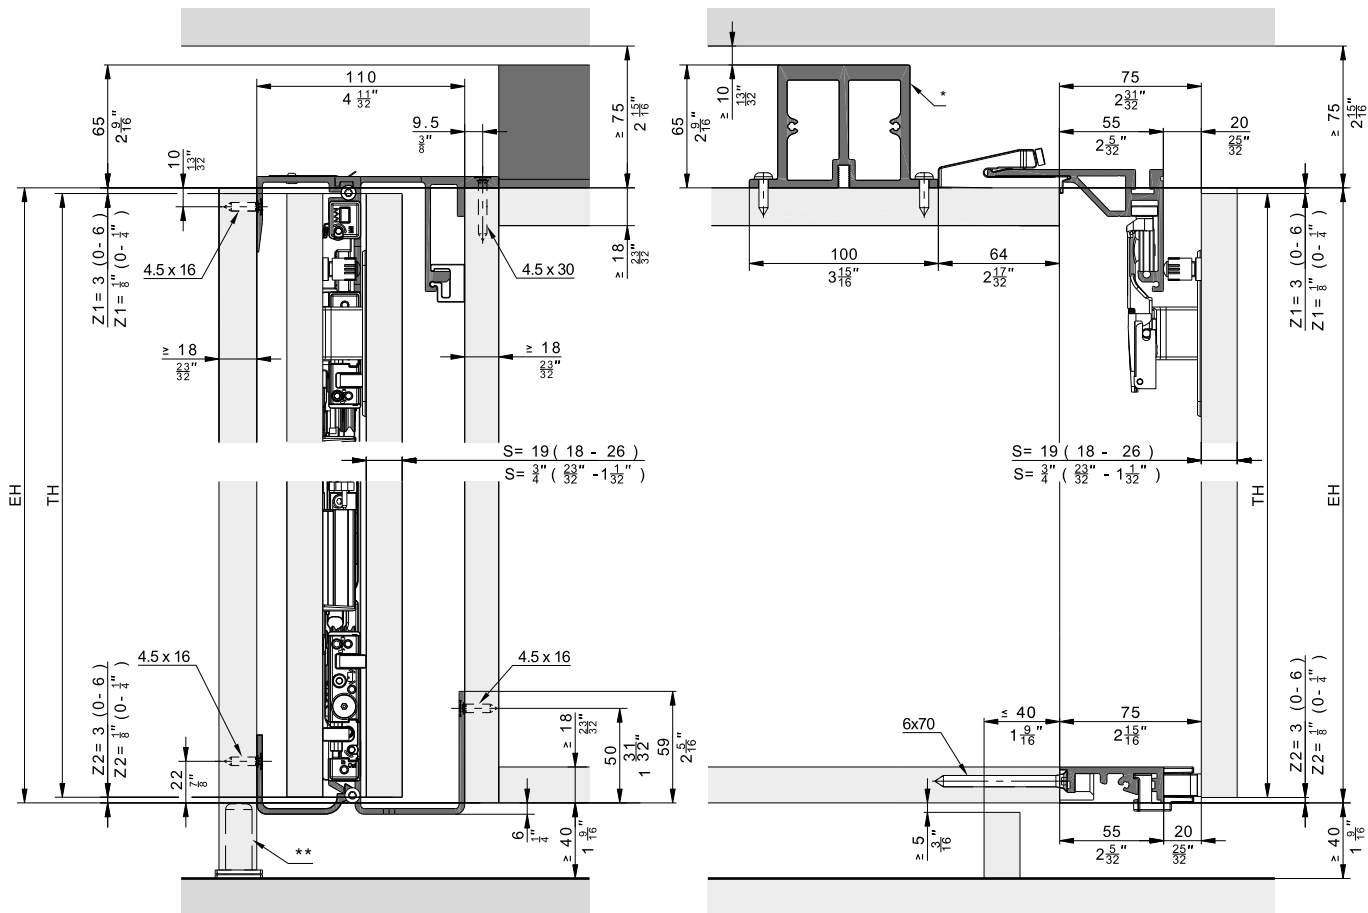
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls

**** Recommendation: Use adjustable foot**

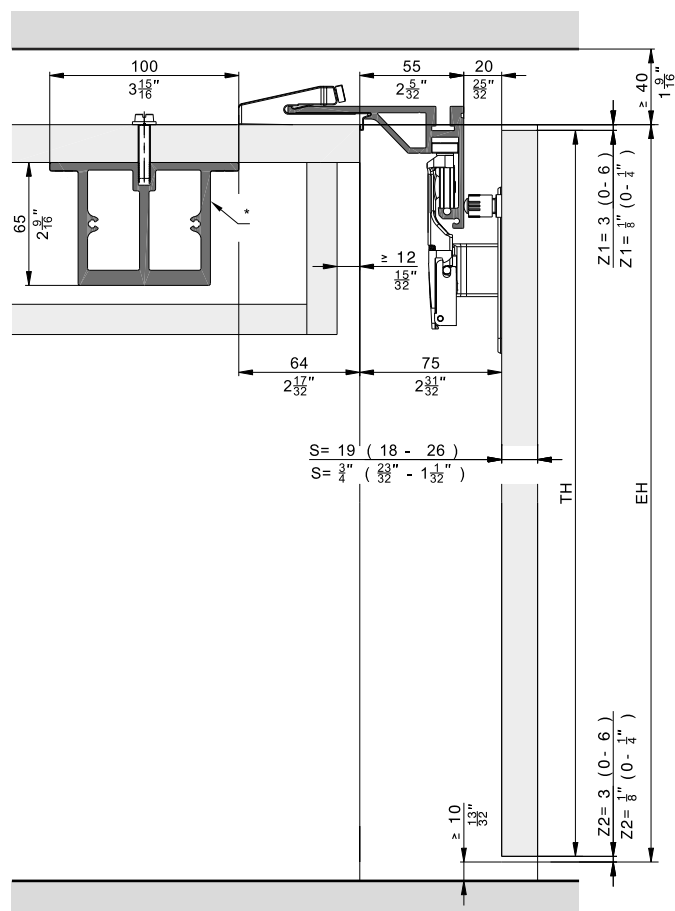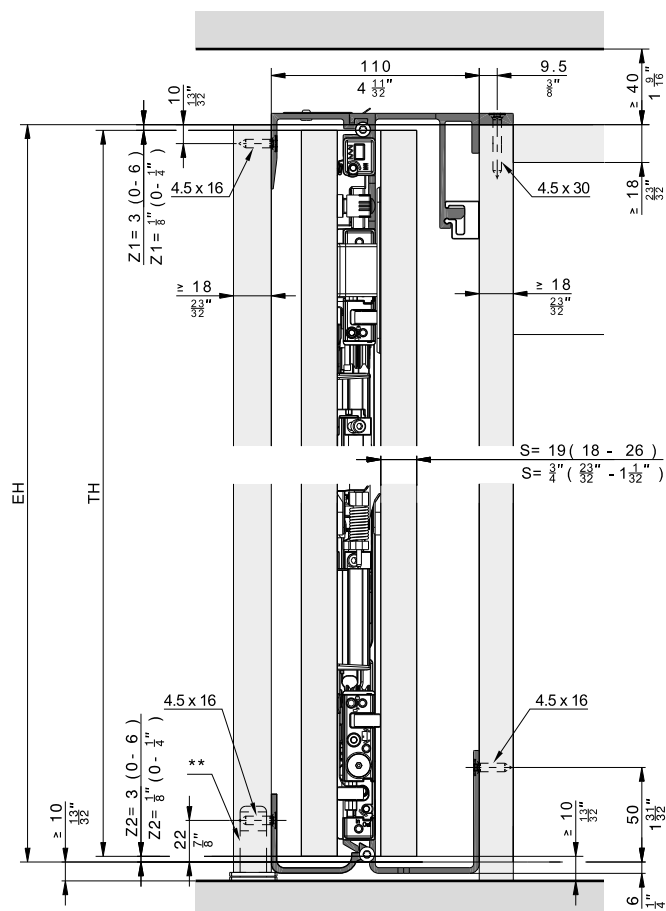
**Floor-to-ceiling doors without base panels,
2 doors and 4 doors**



* Reinforcement profile for 3-door and 4-door systems without separating walls


** Recommendation: Use adjustable foot

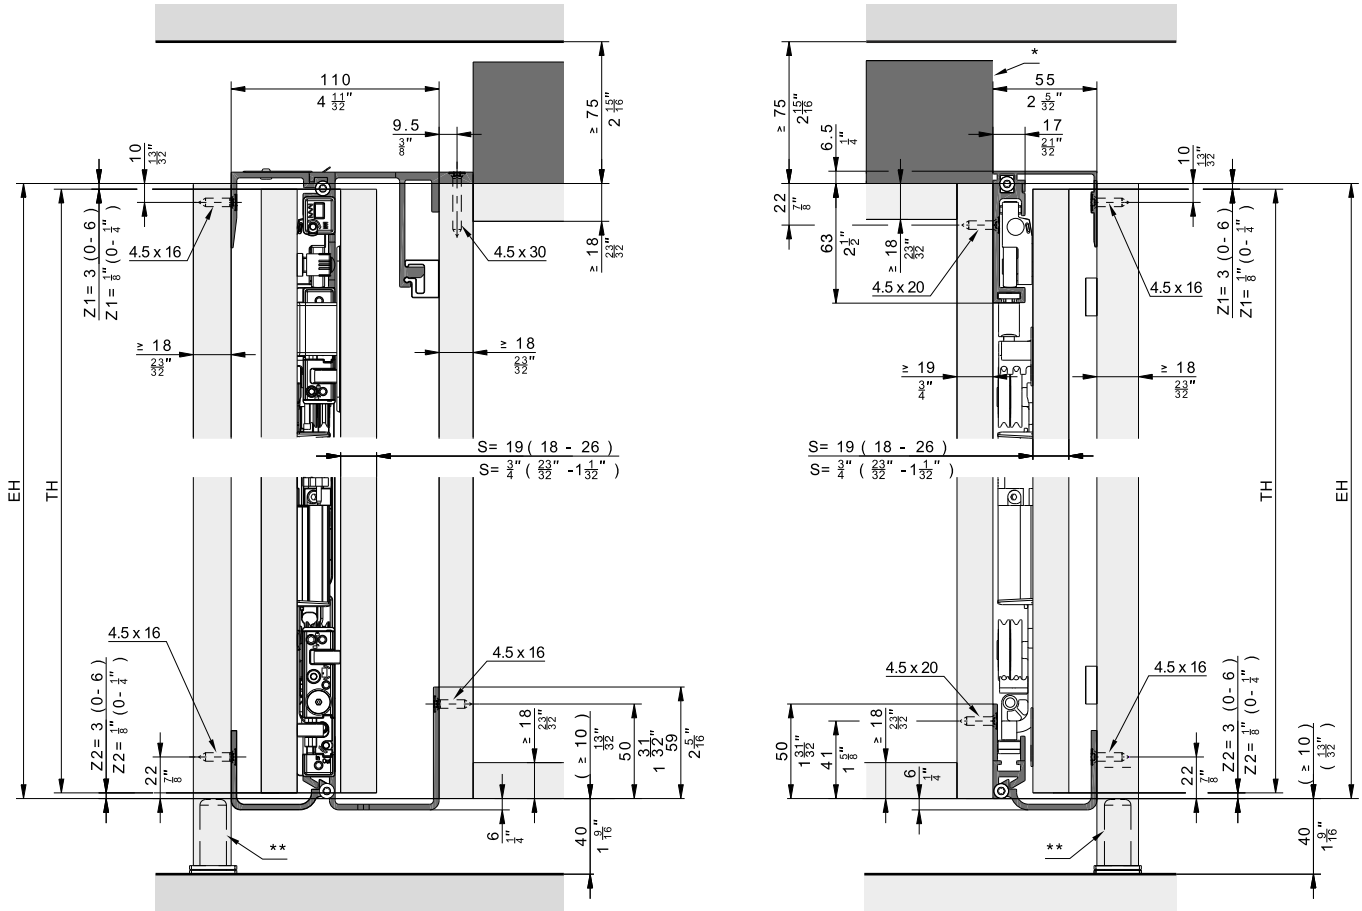Overlay door without base profile, 3 doors






* Reinforcement profile for 3-door and 4-door systems without separating walls

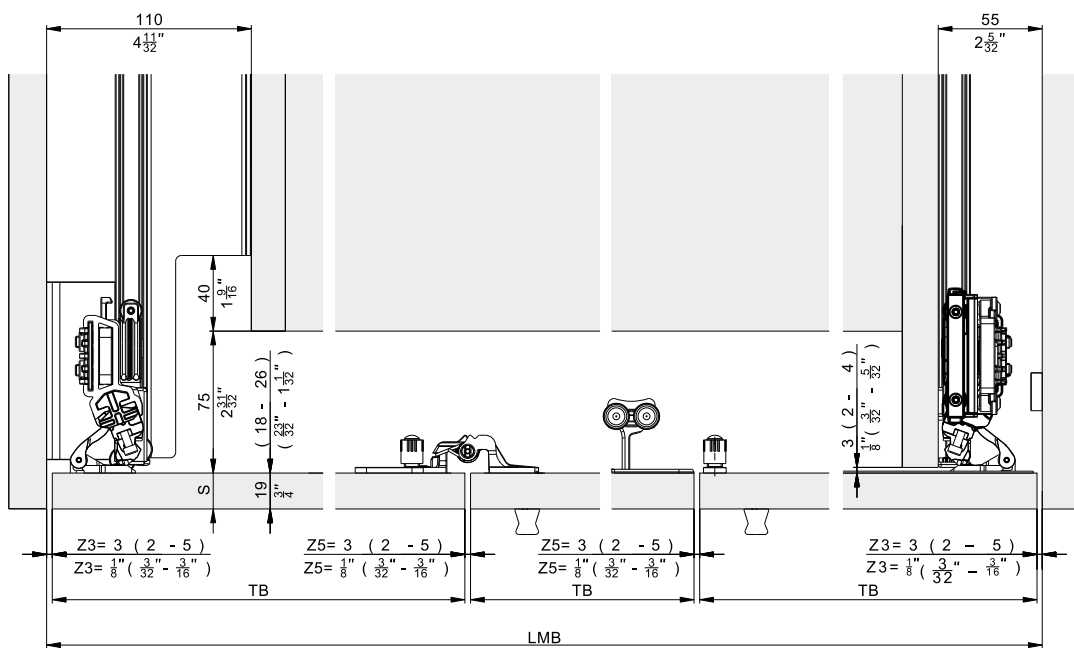** Recommendation: Use adjustable foot




Composed cabinet

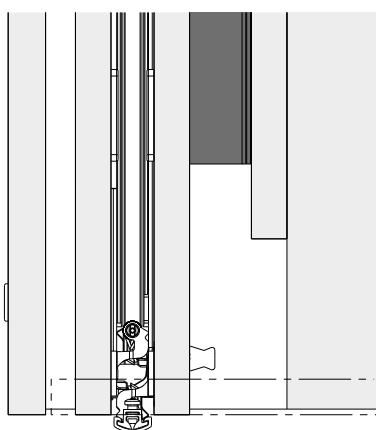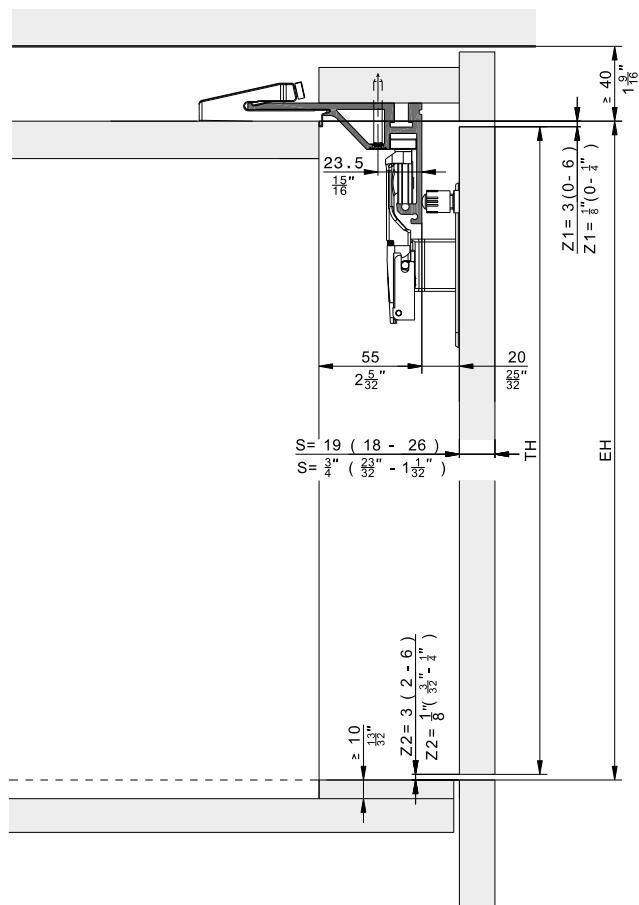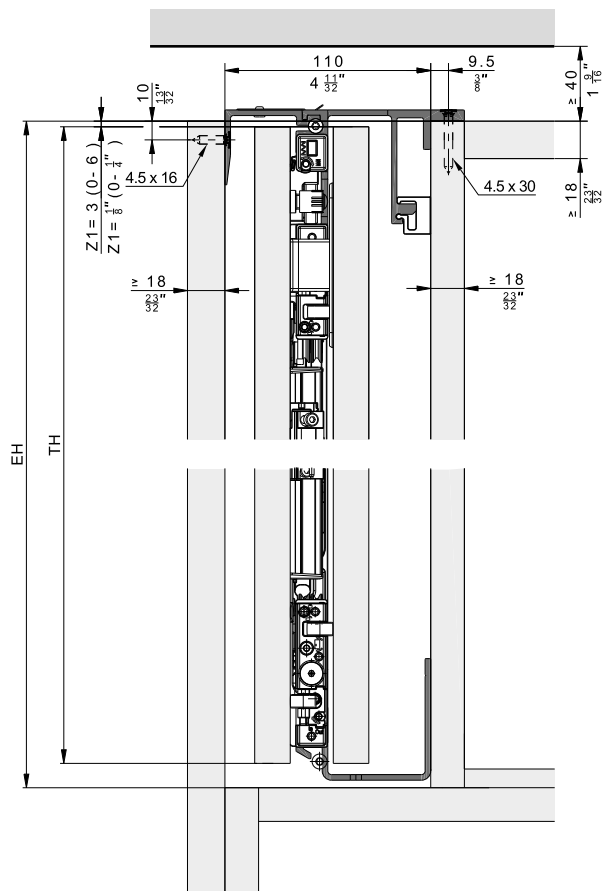


Hardware depth calculation


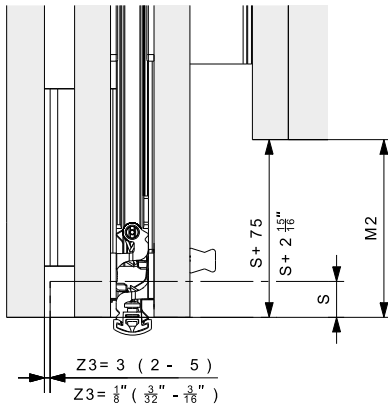
Flush door



	mm	Inch
T2	TB + 92 + Z3 - M2	TB + $3\frac{5}{8}''$ + Z3 - M2
KT2	$\geq T2$	$\geq T2$
E2	TB - M2	TB - M2
M2 min.	$\geq S + 75$	$\geq S + 2\frac{15}{16}''$
M2 max.	$\leq TB - 250$	$\leq TB - 9\frac{27}{32}''$

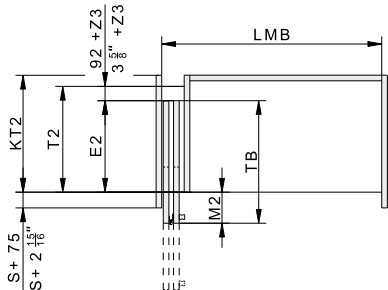

Protruding door

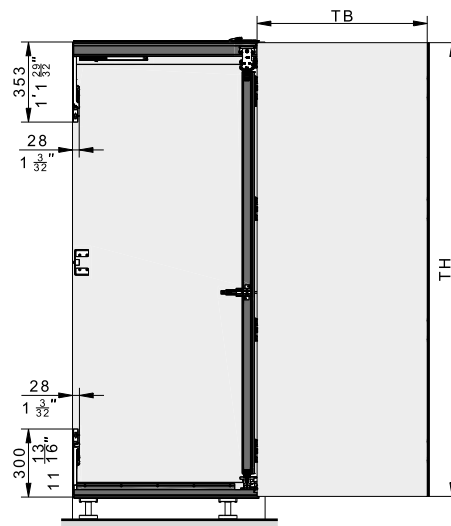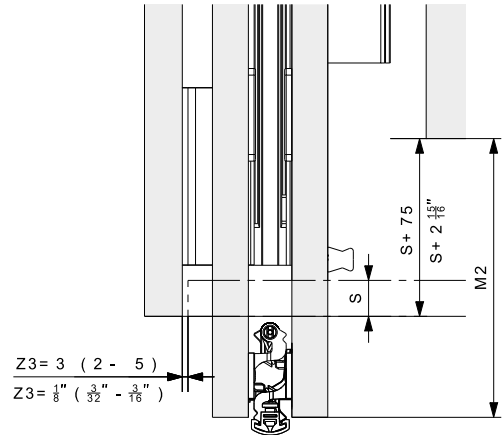

- S = Door thickness
- Z = Gap size
- E2 = Slide-in depth
- T2 = Hardware depth
- TB = Door width
- TH = Door height
- KT2 = Cabinet depth
- LMB = Inside clearance
- M2 = Door projection over cabinet

[Installation](#)

[Adjustment](#)

[Installation](#)

[Adjustment](#)


Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

Hardware for pivoting, folding and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights



Flexibility

Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III



Productivity

Easy installation thanks to high degree of pre-assembly and intuitive adjustment



Aesthetics

Cabinet designs without handle – the technology remains invisible

Technical specifications



10–25 kg (22 to 55 lbs.)



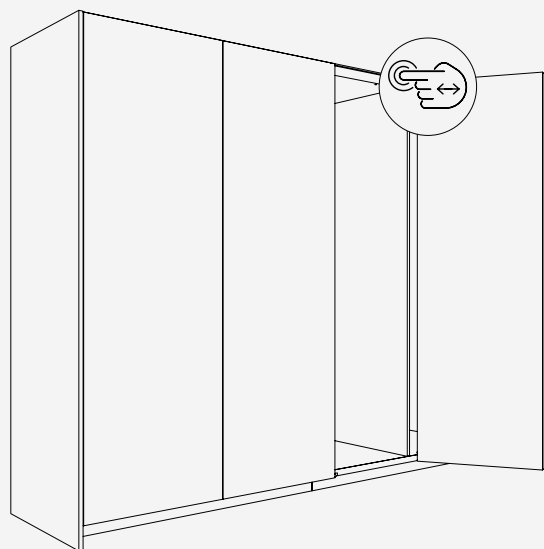
1900–2700 mm (6' 2 13/16" to 8' 10 5/16")



440–750 mm (1' 5 5/16" to 2' 5 17/32")





18–26 mm (23/32" to 1 1/32")




Installation examples

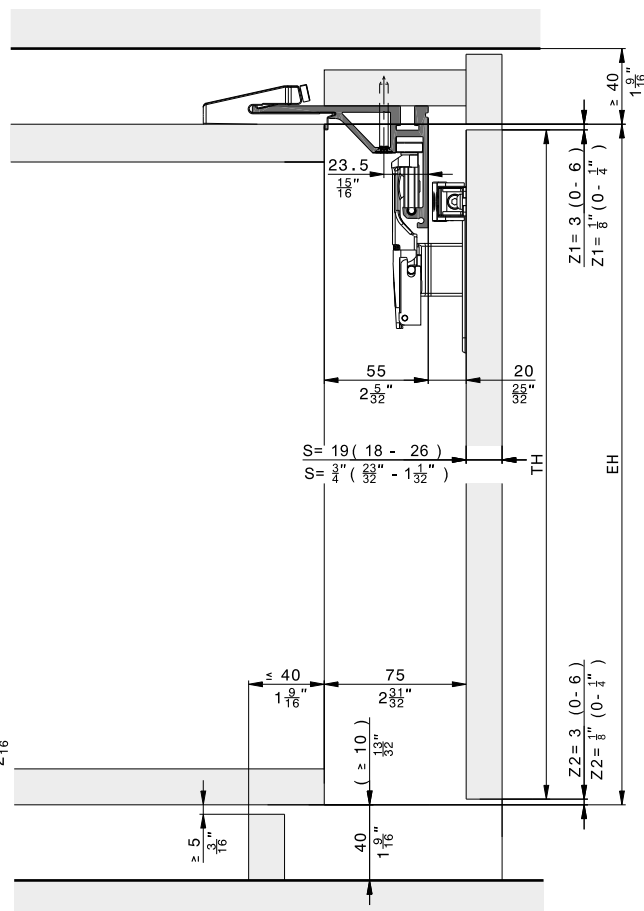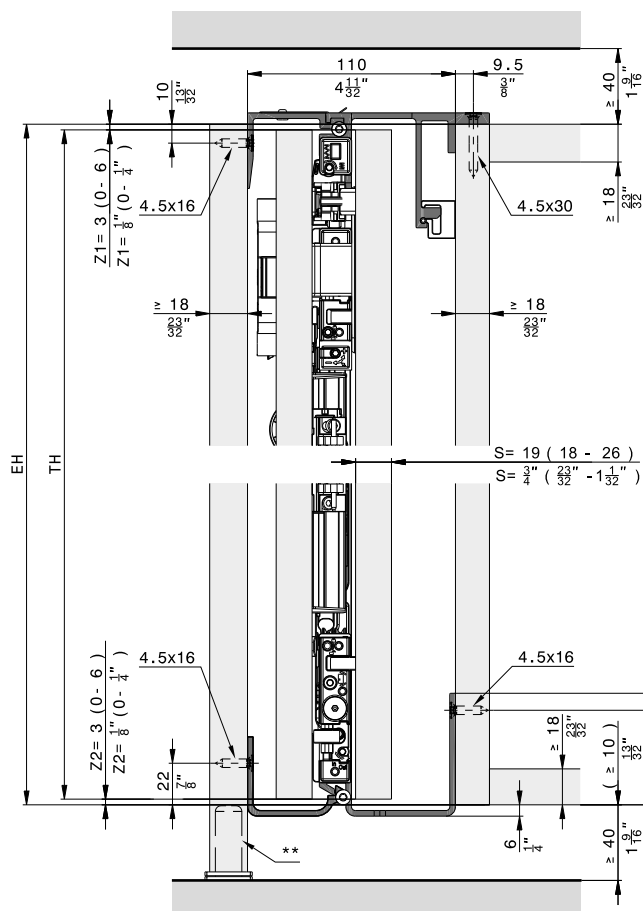Overlay door without base profile




** Recommendation: Use adjustable foot

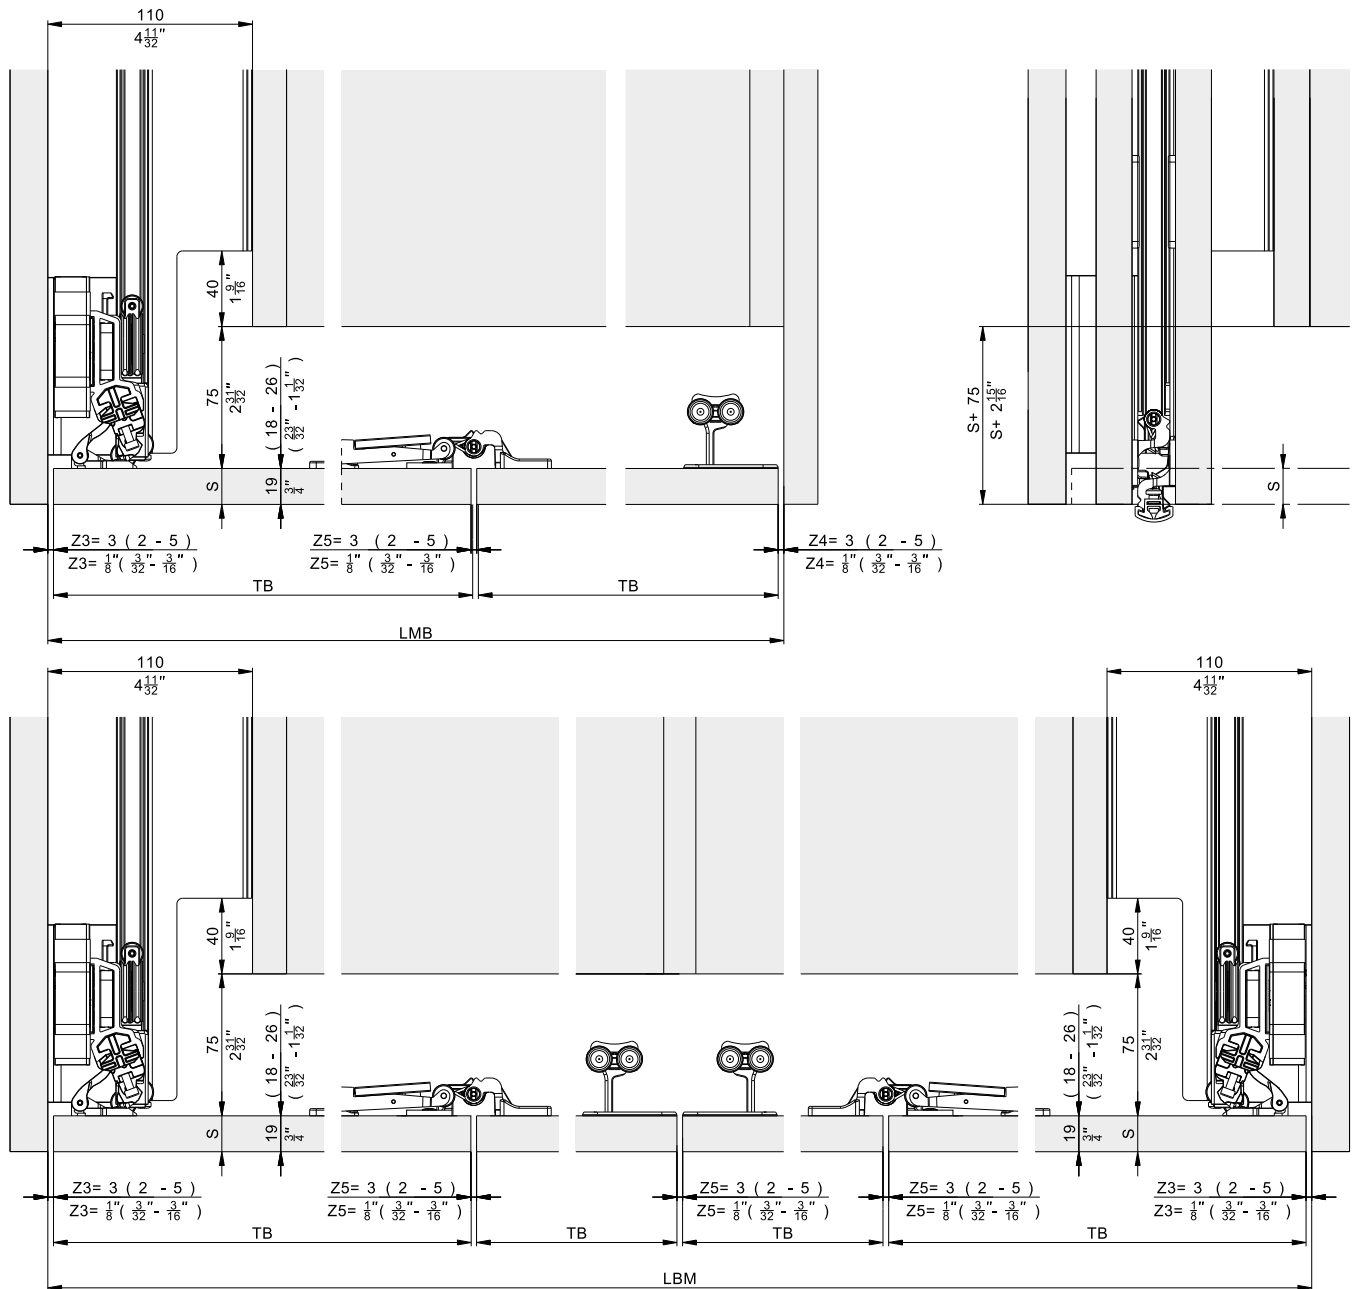Overlay door without base profile, 2 and 4 doors



Required components

for 2-door cabinets




Hawa Folding Concepta III 25 Push, left

Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527



Hawa Folding Concepta III 25 Push, right


Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

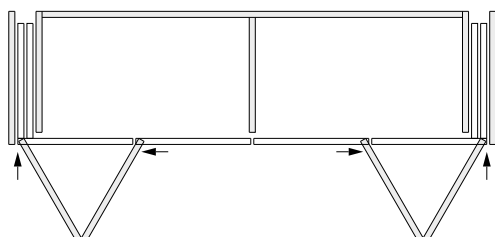for 4-door cabinets




Hawa Folding Concepta III 25 Push, left/right

Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	2	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	1	31510
Hawa Folding Concepta III 25 Push, slide-in set, right	1	31511
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	2	31520

Aluminum, black anodized


	Pcs.	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	2	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	1	31510
Hawa Folding Concepta III 25 Push, slide-in set, right	1	31511
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	2	31527

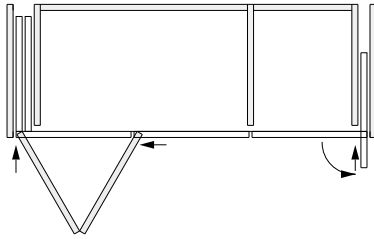for 3-door cabinets

**Hawa Folding Concepta III 25 Push, left with
Hawa Concepta III 35 Push, right**
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

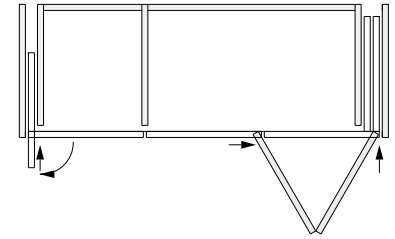Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Push, slide-in set, right	30999
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


**Hawa Folding Concepta III 25 Push, right with
Hawa Concepta III 35 Push, left**
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31505
Hawa Folding Concepta III 25 Push, slide-in set, right	31511
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Push, slide-in set, left	30998
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005




Hawa Configurator
www.hawa.com/configurator


List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 25 kg (55 lbs.)

	No.
Hawa Folding Concepta III 25 Push, basic set, door height 1900–2700 mm (6'2 13/16" to 8'10 5/16")	31505



Set consisting of:

		31505	No.
	Slot nuts for hinge attachment, plastic, black	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, without soft closing mechanism and closing spring, steel, nickel plated	4	31435
	Center concealed hinge, spring loaded, steel, matt nickel-plated	4	30794
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 26 pieces	1	31533
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Screw set for Push-to-open and folding door soft closing mechanism	1	31531
	Folding door soft closing mechanism	1	31064
	Push-to-open for folding door	1	31332
	Counterplate for Push-to-open folding door, plastic, black	1	31036
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530

Suitable slide-in set







	No.
Hawa Folding Concepta III 25 Push, slide-in set, left	31510
Hawa Folding Concepta III 25 Push, slide-in set, right	31511

Set consisting of:

		31510	31511	No.
	Slide-in unit Hawa Folding Concepta III 25 Push, left	1		31002
	End stop bracket for Push ejector, steel, zinc-plated	1	1	52560
	Push ejector, plastic, black	1	1	52454
	Slide-in securing mechanism, plastic, black	1	1	30966
	Adhesive plate for Push-to-open folding door, with double-sided adhesive tape, silver-gray and black	1	1	52118
	Slide-in unit Hawa Folding Concepta III 25 Push, right		1	31003

Suitable 2-door and 4-door track sets, aluminum, anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

		31514	31515	31518	No.
Set consisting of:					
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
	Running track curve, left, aluminum, anodized	1		1	31365
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585


Continued table on next column

Table continued from previous column

	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, anodized		1	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343

Upright set, aluminum, anodized








	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

		31520	No.
Set consisting of:			
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
	Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2700 mm (8' 10 5/16")	1	31232
	Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Suitable 3-door track sets, aluminum, anodized




	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting of:

	31516	31517	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, anodized, L= 1954 mm (6' 4 15/16")	1	1	31341
 Running track curve, left, aluminum, anodized	1		31365
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340







Continued table on next column

Table continued from previous column

 Running track curve, right, aluminum, anodized		1	31366
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31337
 Connector, top right L= 788 mm (2' 7 1/32")		1	31371





Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

	31521	31522	31525	No.
Set consisting of:				
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
 Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
 Running track curve, left, aluminum, black anodized	1		1	31367
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
 Track support and Connector part for running track curve	1	1	2	31543
 Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
 Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344

Upright set, aluminum, black anodized







	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

	31527	No.
Set consisting of:		
 Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
 Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized, L= 2700 mm (8' 10 5/16")	1	31233
 Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Suitable 3-door track sets, aluminum, black anodized



	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524

Set consisting of:


	31523	31524	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
 Running track curve, left, aluminum, black anodized	1		31367
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Cover-up pen for cut edge, black	1	1	52117

Continued table on next column



Table continued from previous column

 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
 Running track curve, right, aluminum, black anodized	1	31368
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
 Connector, top right, L= 788 mm (2' 7 1/32")	1	31371


Reinforcement profiles

	No.
 Reinforcement profile for running track front, 2765 mm (9' 27/32"), 4 doors, aluminum, anodized	52109
 Reinforcement profile for running track front, 2085 mm (6' 10 3/32"), 3 doors, aluminum, anodized	52110

Base profiles

	No.
 Base profile set, 2 doors, aluminum, anodized	52089
 Base profile set, 3 doors, aluminum, anodized	52090
 Base profile set, 4 doors, aluminum, anodized	52091
 Base profile set, 2 doors, aluminum, black anodized	52092
 Base profile set, 3 doors, aluminum, black anodized	52093
 Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
 Routing jig for folding hinge	52121
 Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting

→ Details under Accessories from page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum	056.3192.072
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32" to 5' 9 7/8"), aluminum	056.3192.079

Aluminum, anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, anodized	056.3192.071
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, anodized	056.3192.082


Aluminum, black anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32" to 7' 5 9/16"), aluminum, black anodized	056.3192.081

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

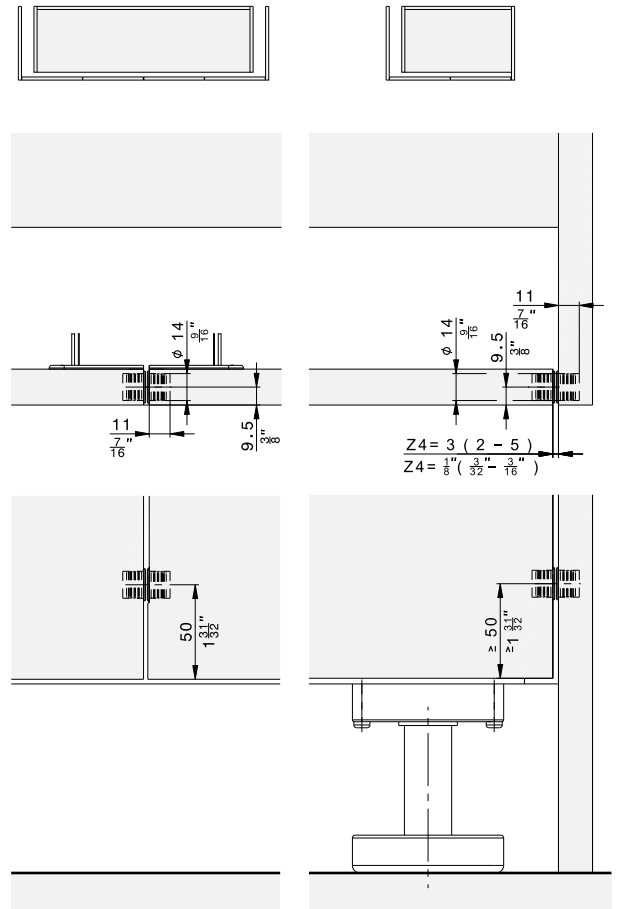
Centering parts



Further installation examples

Overlay door with base profile, 2 and 4 doors

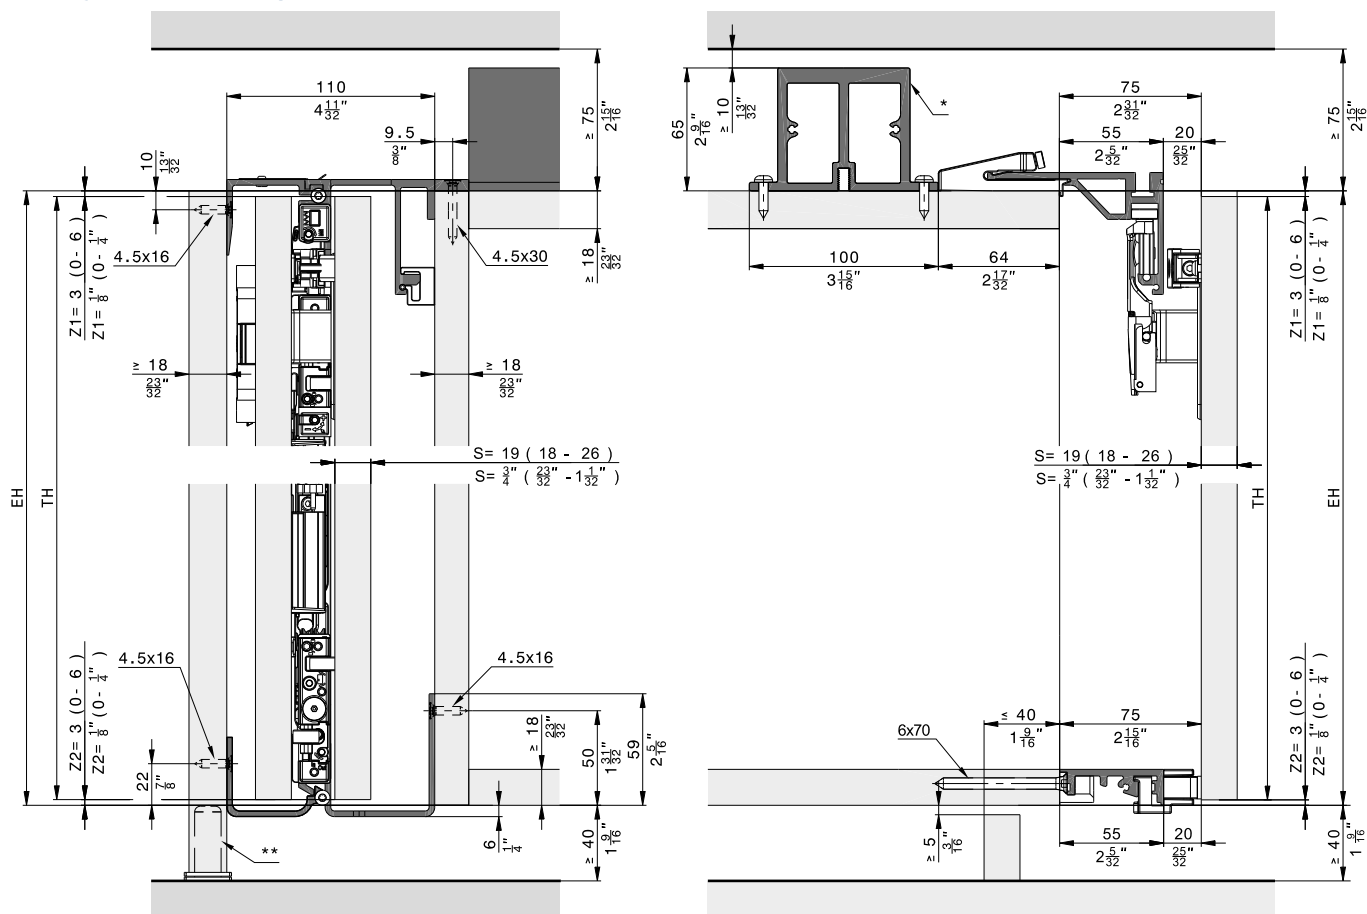
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls

** Recommendation: Use adjustable foot

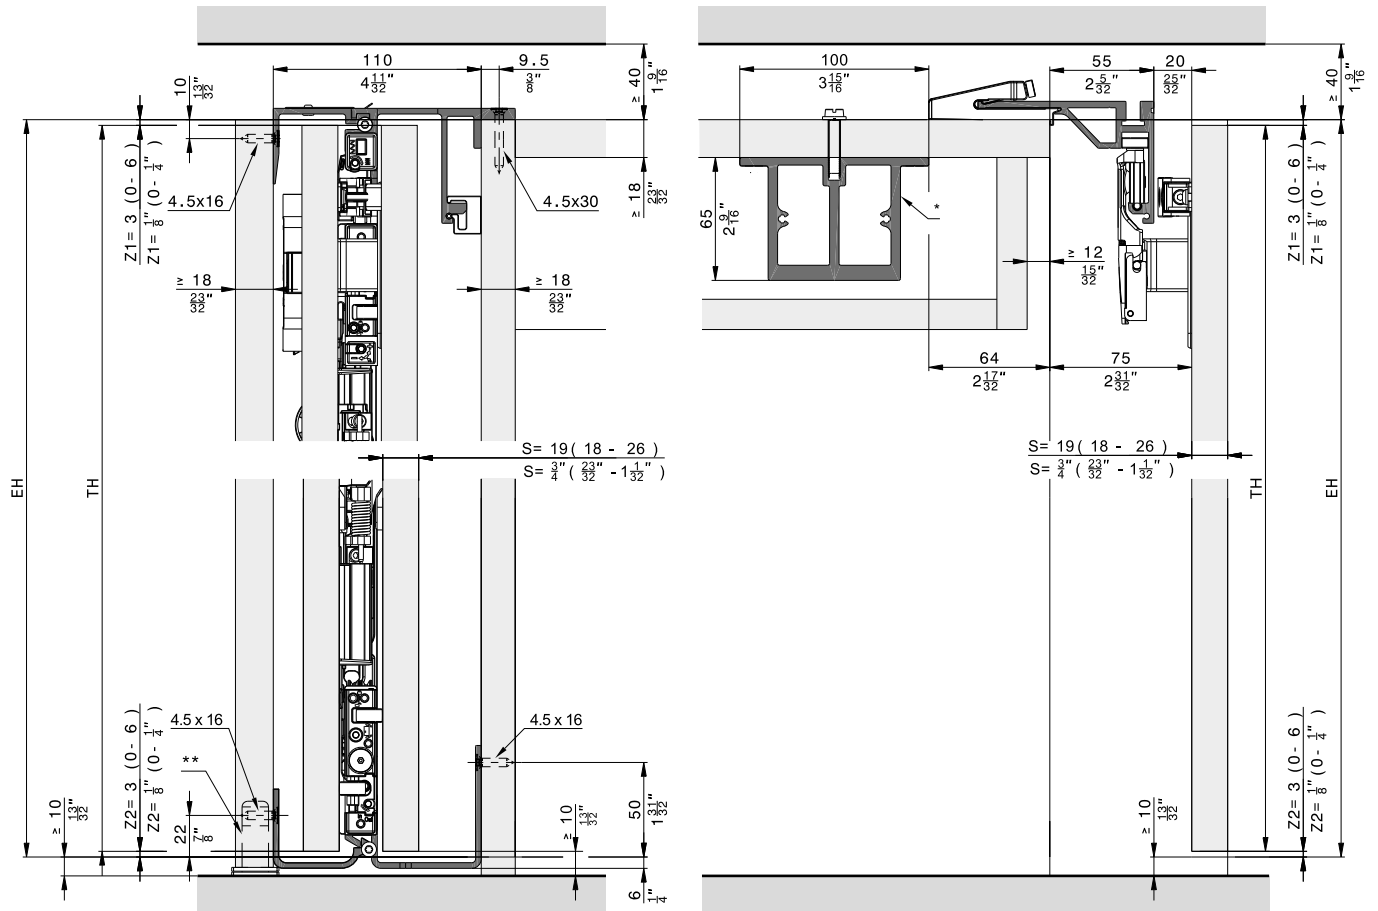
Floor-to-ceiling doors without base panels, 2 doors and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls


** Recommendation: Use adjustable foot

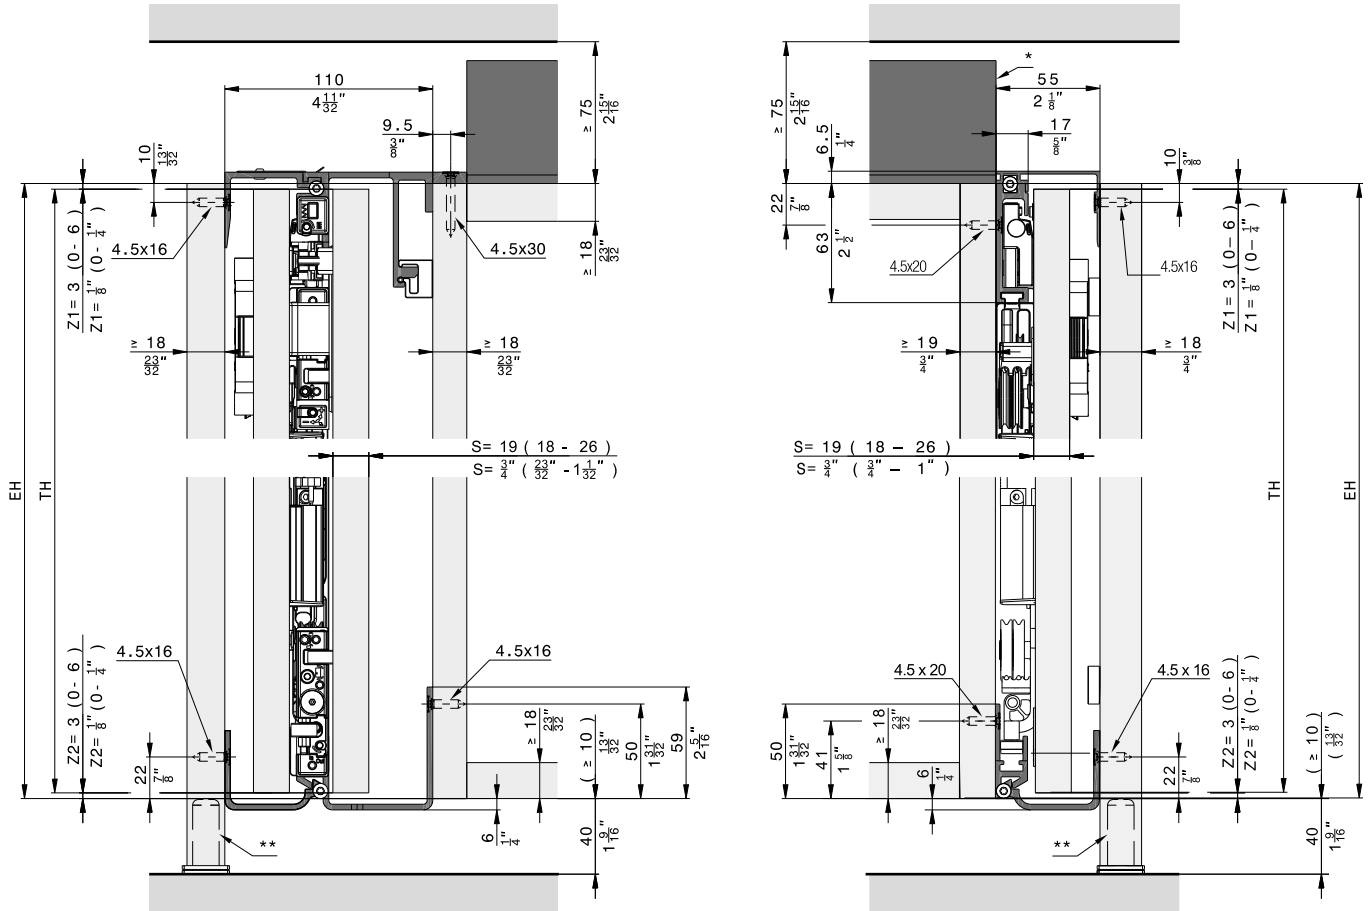Overlay door without base profile, 3 doors




* Reinforcement profile for 3-door and 4-door systems without separating walls

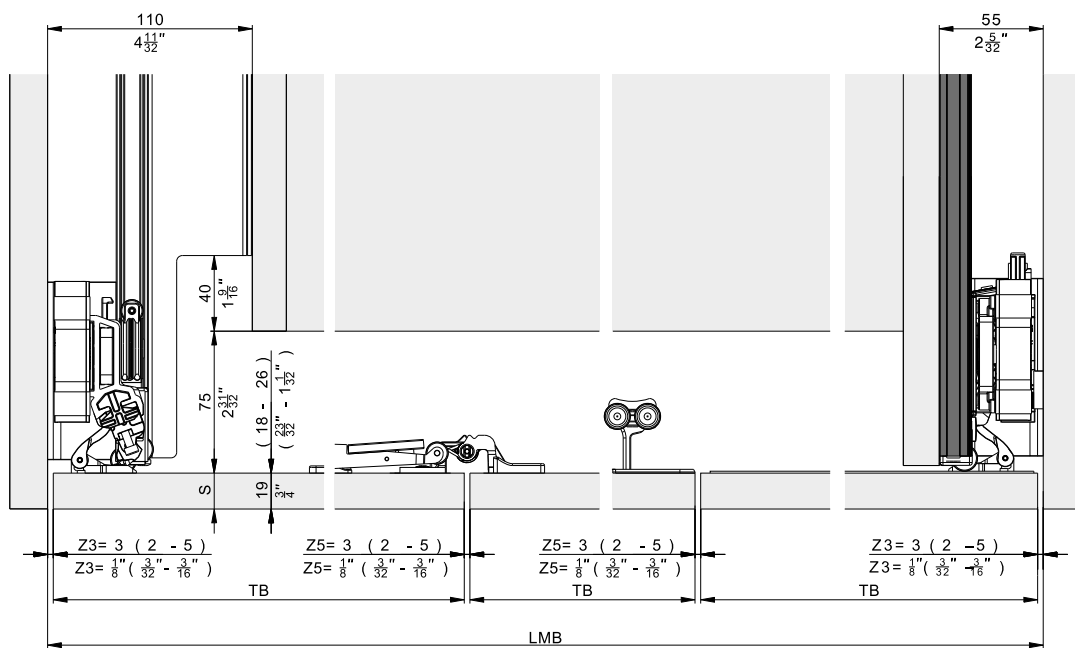** Recommendation: Use adjustable foot




Hardware depth calculation


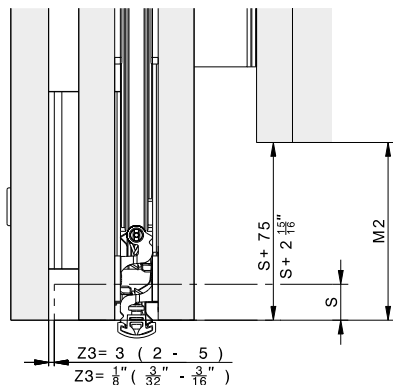
Flush door



Protruding door

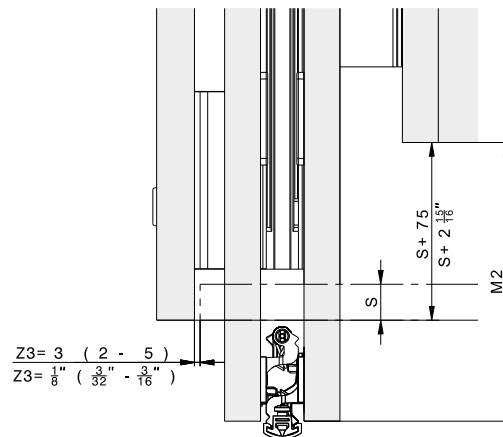

	mm	Inch
T2	TB + 92 + Z3 - M2	TB + 3 5/8" + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 15/16"
M2 max.	≤ TB - 250	≤ TB - 9 27/32"

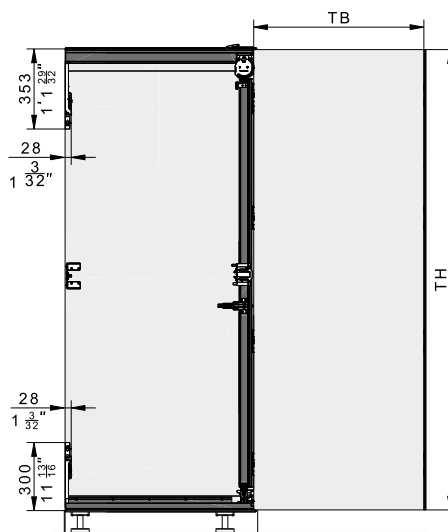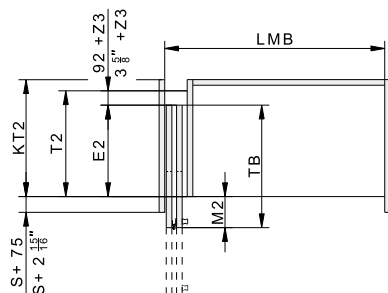

- S = Door thickness
- Z = Gap size
- E2 = Slide-in depth
- T2 = Hardware depth
- TB = Door width
- TH = Door height
- KT2 = Cabinet depth
- LMB = Inside clearance
- M2 = Door projection over cabinet

[Installation](#)

[Installation](#)

[Adjustment](#)

[Adjustment](#)


Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

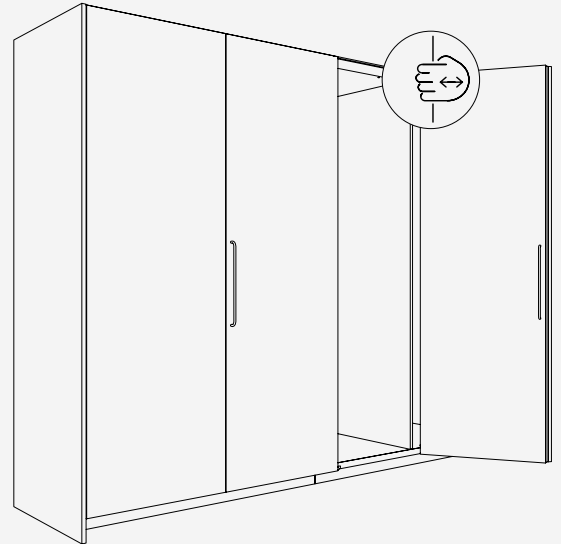
Hardware for pivoting, folding and lateral sliding in of wooden doors up to 25 kg (55 lbs). Uniform, flush front design with even gap pattern. Invisible technology. Pull version with handle.

Product highlights

- Flexibility** Variable door dimensions, also for floor-to-ceiling, walk-in closets – can be combined with Hawa Concepta III
- Productivity** Easy installation thanks to high degree of pre-assembly and intuitive adjustment
- Comfort** Opening and closing with very little effort – one hand is enough


Technical specifications

- 10–25 kg (22 to 55 lbs.)
- 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")
- 440–750 mm (1' 5 5/16" to 2' 5 17/32")
- 18–26 mm (23/32" to 1 1/32")




Installation examples

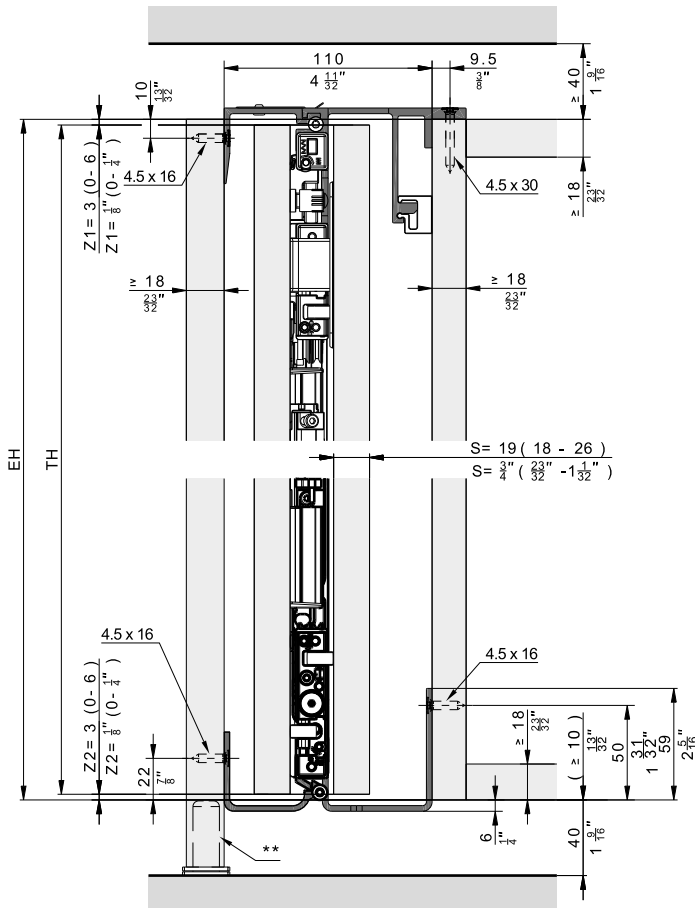
Overlay door without base profile



** Recommendation: Use adjustable foot

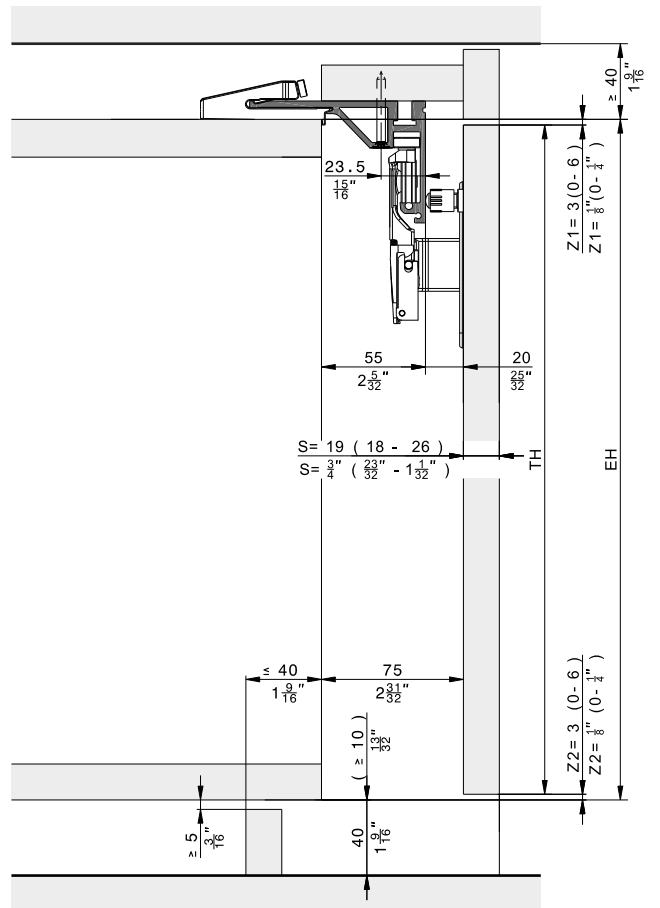


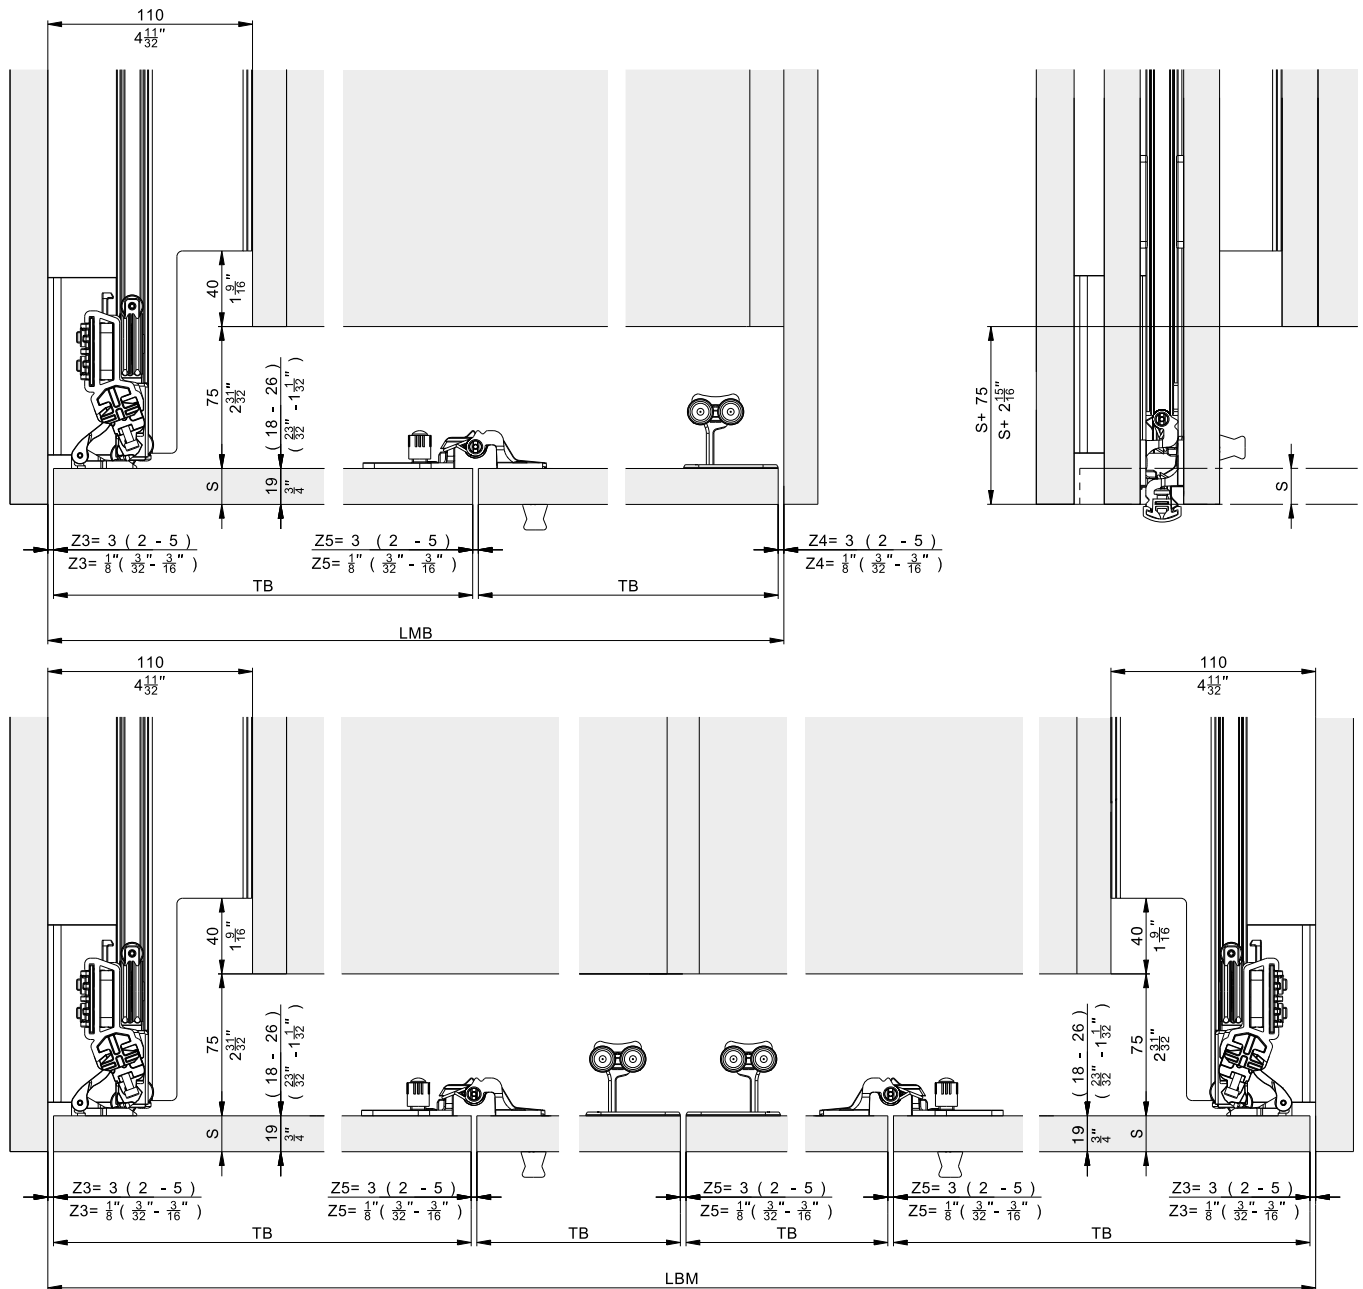Overlay door without base profile, 2 and 4 doors



Required components

for 2-door cabinets




Hawa Folding Concepta III 25 Pull, left
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527




Hawa Folding Concepta III 25 Pull, right
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520

Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

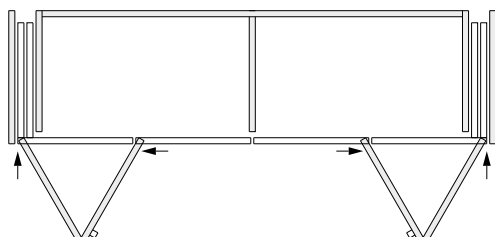for 4-door cabinets




Hawa Folding Concepta III 25 Pull, left/right
Aluminum, anodized

	Pcs.	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	2	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	1	31518
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	2	31520

Aluminum, black anodized


	Pcs.	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	2	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	1	31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	1	31513
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	1	31525
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	2	31527

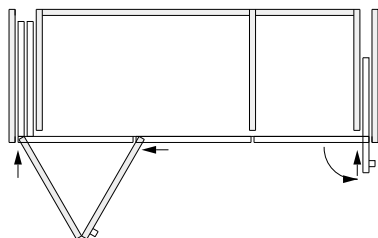for 3-door cabinets

**Hawa Folding Concepta III 25 Pull, left with
Hawa Concepta III 35 Pull, right**
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005

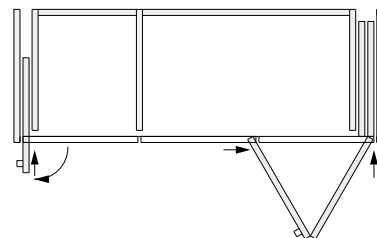Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, left	31512
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set right, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30997
Hawa Concepta III 25/35 Pull, slide-in set, right	31001
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


**Hawa Folding Concepta III 25 Pull, right with
Hawa Concepta III 35 Pull, left**
Aluminum, anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005


Aluminum, black anodized

	No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	31507
Hawa Folding Concepta III 20/25 Pull, slide-in set, right	31513
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527
Hawa Concepta III 35 Push/Pull, basic set left, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")	30996
Hawa Concepta III 25/35 Pull, slide-in set, left	31000
Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	30771
Connector set 55 mm (2 5/32"), exterior connection to cabinet, top and bottom	31005




Hawa Configurator
www.hawa.com/configurator


List of individual parts, which are included in the sets

Set for 1 folding/slide-in door up to 25 kg (55 lbs.)

			No.
Hawa Folding Concepta III 25 Pull, basic set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16")			31507
			No.
Set consisting of:			
	Slot nuts for hinge attachment, plastic, black	4	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	30738
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	4	31070
	Center concealed hinge, not spring loaded, steel, matt nickel-plated	4	31362
	Screw for concealed hinges and center concealed hinges, 4x16 mm (5/32"x5/8"), set of 26 pieces	1	31533
	Folding running gear, nickel-plated	1	31313
	Folding running gear hinge	1	31314
	Soft closing mechanism	1	31222
	Stop buffer adjustable, plastic, anthracite	1	31550
	Set of adjusting tools	1	31047
	Countersunk head screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated, set of 28 pieces	1	31529
	Screw set for double running track and Connector attachment at the bottom	1	31530







Suitable slide-in set

			No.
Hawa Folding Concepta III 20/25 Pull, slide-in set, left			31512
Hawa Folding Concepta III 20/25 Pull, slide-in set, right			31513
			No.
Set consisting of:			
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, left	1	31004
	Pull end stop bracket, steel, zinc-plated	1	31541
	Slide-in securing mechanism, plastic, black	1	30966
	Slide-in unit Hawa Folding Concepta III 20/25 Pull, right	1	31046

Suitable 2-door and 4-door track sets, aluminum, anodized






	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, anodized	31514
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, anodized	31515
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, anodized	31518

Set consisting of:

	31514	31515	31518	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
 Running track front, aluminum, anodized, L= 1272 mm (4' 2 3/32")	1	1		31210
 Running track curve, left, aluminum, anodized	1		1	31365
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
 Track support and Connector part for running track curve	1	1	2	31543
 Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
 Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column


Table continued from previous column

 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
 Running track curve, right, aluminum, anodized		1	1	31366
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
 Connector, top right, L= 788 mm (2' 7 1/32")		1	1	31371
 Running track front, aluminum, anodized, L= 2539 mm (8' 3 31/32")			1	31343

Upright set, aluminum, anodized

	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized	31520









Set consisting of:

	31520	No.
 Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
 Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2700 mm (8' 10 5/16")	1	31232
 Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503

Suitable 3-door track sets, aluminum, anodized




	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, anodized	31516
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, anodized	31517

Set consisting of:

	31516	31517	No.
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, anodized, L= 1954 mm (6' 4 15/16")	1	1	31341
 Running track curve, left, aluminum, anodized	1		31365
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	31340

Continued table on next column

Table continued from previous column

	Running track curve, right, aluminum, anodized	1	31366
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")	1	31371

Suitable 2-door and 4-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 2 doors, left, aluminum, black anodized	31521
Hawa Folding Concepta III 20/25, track set 2 doors, right, aluminum, black anodized	31522
Hawa Folding Concepta III 20/25, track set 4 doors, aluminum, black anodized	31525

		31521	31522	31525	No.
Set consisting of:					
	Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31339
	Running track front, aluminum, black anodized, L= 1272 mm (4' 2 3/32")	1	1		31211
	Running track curve, left, aluminum, black anodized	1		1	31367
	Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		1	31336
	Connector, top left L= 788 mm (2' 7 1/32")	1		1	31370
	Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	2	30977
	Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	6	31086
	Track support and Connector part for running track curve	1	1	2	31543
	Running track adapter, plastic, anthracite, set of 4 pieces	1	1	2	23645
	Countersunk head screw for running track adapter, 4.5x16 mm, set of 16 pieces, incl. Torx T20	1	1	2	31585

Continued table on next column

Table continued from previous column

	Cover-up pen for cut edge, black	1	1	1	52117
	Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31340
	Running track curve, right, aluminum, black anodized		1	1	31368
	Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")		1	1	31337
	Connector, top right, L= 788 mm (2' 7 1/32")		1	1	31371
	Running track front, aluminum, black anodized, L= 2539 mm (8' 3 31/32")			1	31344








Upright set, aluminum, black anodized

	No.
Hawa Folding Concepta III 25, upright set, door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized	31527

		31527	No.
Set consisting of:			
	Upright profile, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, anodized, L= 2474 mm (8' 1 13/32")	1	30771
	Cover panel for door joint, for door height 1900–2700 mm (6' 2 13/16" to 8' 10 5/16"), aluminum, black anodized, L= 2700 mm (8' 10 5/16")	1	31233
	Retaining clip for cover panel 2700 mm (8' 10 5/16"), plastic, black, set of 8 pieces	1	31503





Suitable 3-door track sets, aluminum, black anodized

	No.
Hawa Folding Concepta III 20/25, track set 3 doors, left, aluminum, black anodized	31523
Hawa Folding Concepta III 20/25, track set 3 doors, right, aluminum, black anodized	31524


	31523	31524	No.
Set consisting of:			
 Double running track top left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31339
 Running track front, aluminum, black anodized, L= 1954 mm (6' 4 15/16")	1	1	31342
 Running track curve, left, aluminum, black anodized	1		31367
 Bottom guide track left, aluminum, anodized, L= 820 mm (2' 8 9/32")	1		31336
 Connector, top left L= 788 mm (2' 7 1/32")	1		31370
 Connecting profile for Connector, top, aluminum, L= 500 mm (1' 7 11/16")	1	1	30977
 Connector clips, bottom, plastic, black, L= 94 mm (3 11/16")	3	3	31086
 Track support and Connector part for running track curve	1	1	31543
 Running track adapter, plastic, anthracite, set of 6 pieces	1	1	24870
 Stop set 3 doors Push/Pull	1	1	31538
 Countersunk head screw for running track adapter, 4.5x16 mm (3/16"x5/8"), set of 24 pieces	1	1	31587
 Cover-up pen for cut edge, black	1	1	52117

Continued table on next column





Table continued from previous column

 Double running track top right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31340
 Running track curve, right, aluminum, black anodized	1	31368
 Bottom guide track right, aluminum, anodized, L= 820 mm (2' 8 9/32")	1	31337
 Connector, top right, L= 788 mm (2' 7 1/32")	1	31371


Reinforcement profiles

	No.
 Reinforcement profile for running track front, 2765 mm (9' 27/32"), 4 doors, aluminum, anodized	52109
 Reinforcement profile for running track front, 2085 mm (6' 10 3/32"), 3 doors, aluminum, anodized	52110

Base profiles

	No.
 Base profile set, 2 doors, aluminum, anodized	52089
 Base profile set, 3 doors, aluminum, anodized	52090
 Base profile set, 4 doors, aluminum, anodized	52091
 Base profile set, 2 doors, aluminum, black anodized	52092
 Base profile set, 3 doors, aluminum, black anodized	52093
 Base profile set, 4 doors, aluminum, black anodized	52094

Accessories

	No.
 Routing jig for folding hinge	52121
 Magnetic centering part, with including drilling jig, aluminum, anodized	24006

Straightening fitting

→ Details under Accessories from page 327

Aluminum, untreated

		No.
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum	056.3192.072
	Straightening fitting for doors 1715–2275 mm (3' 11 27/32" to 5' 9 7/8"), aluminum	056.3192.079

Aluminum, anodized

		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, anodized	056.3192.071
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, anodized	056.3192.082

Aluminum, black anodized


		No.
	Straightening fitting for doors 2240–2850 mm (7' 4 3/16" to 9' 4 7/32"), aluminum, black anodized, incl. cover caps	056.3192.074
	Straightening fitting for doors 2040–2600 mm (6' 8 5/16" to 8' 6 3/8"), aluminum, black anodized	056.3192.075
	Straightening fitting for doors 1715–2275 mm (5' 7 15/32" to 7' 5 9/16"), aluminum, black anodized	056.3192.081

Automatic shut-off device


In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.

www.halemeier.de

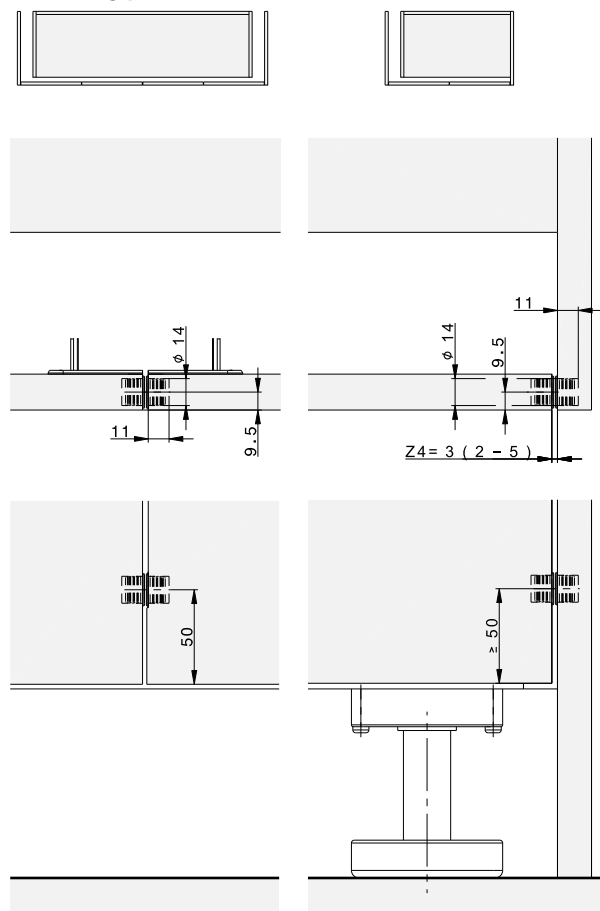Centering parts



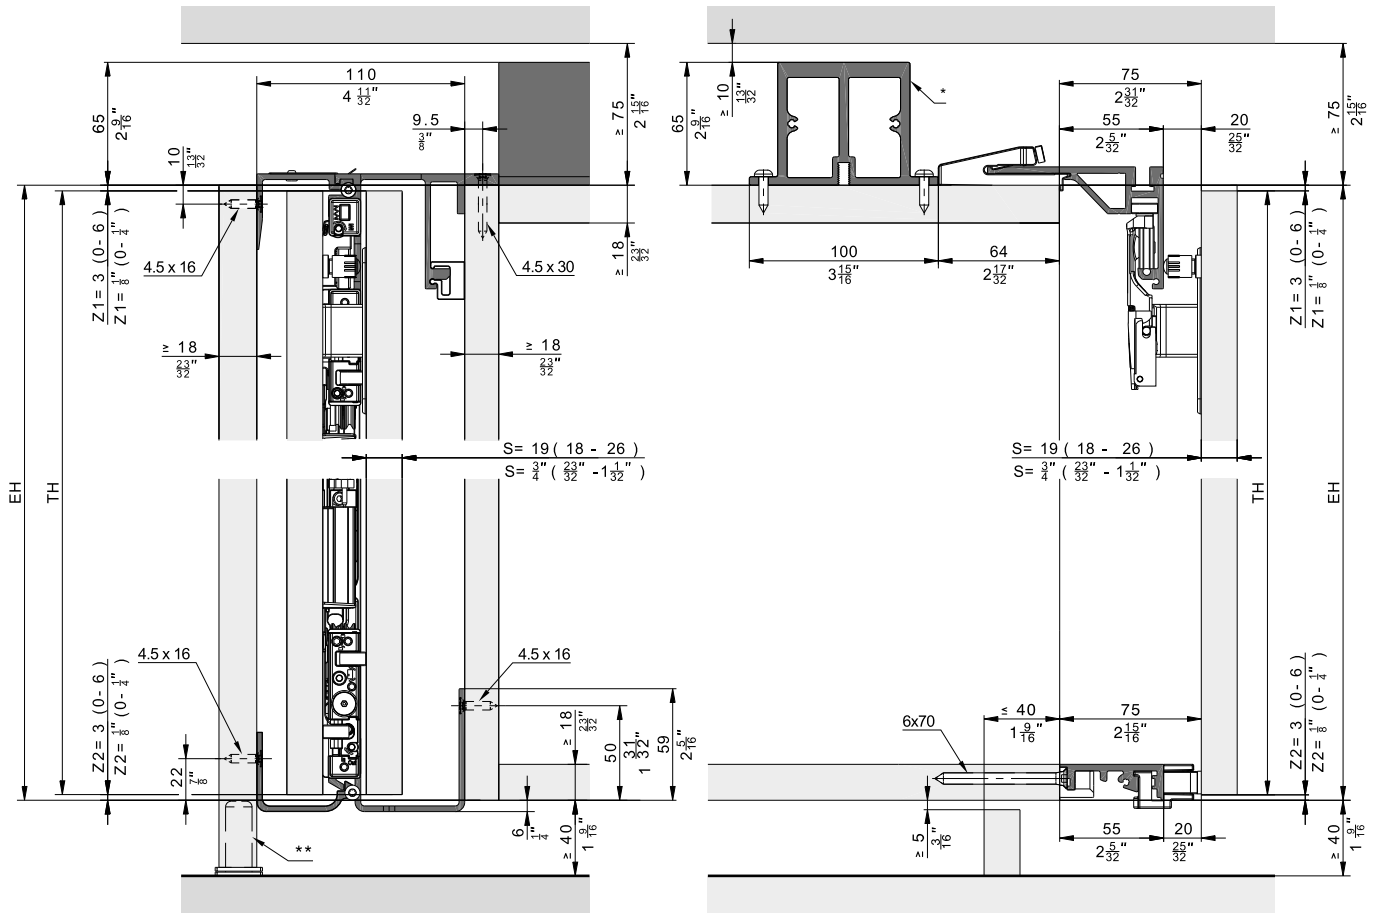
Further installation examples
Overlay door with base profile, 2 and 4 doors



* Reinforcement profile for 3-door and 4-door systems without separating walls


** Recommendation: Use adjustable foot

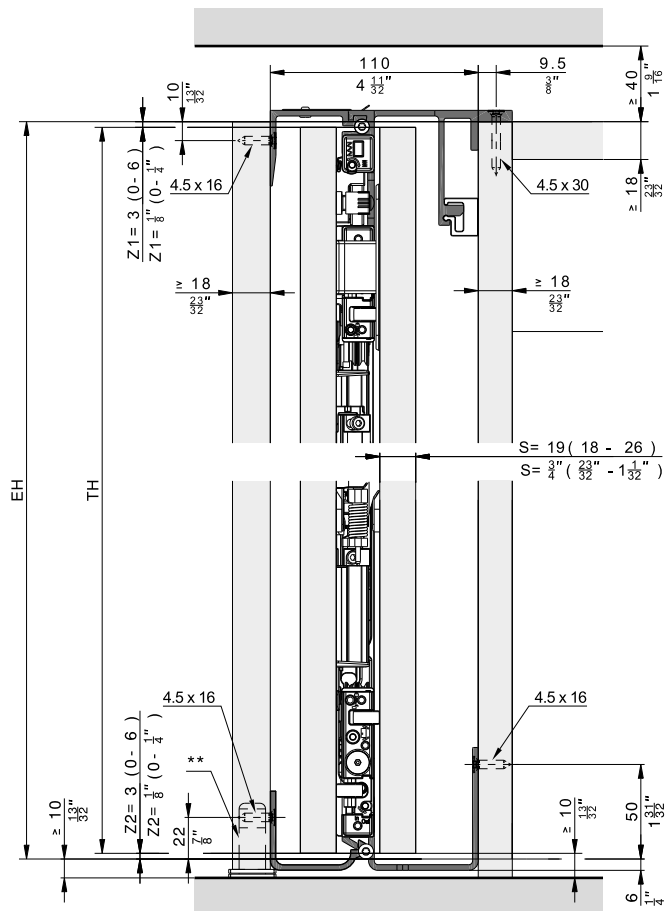Floor-to-ceiling doors without base panels, 2 doors and 4 doors




* Reinforcement profile for 3-door and 4-door systems without separating walls

**** Recommendation: Use adjustable foot**

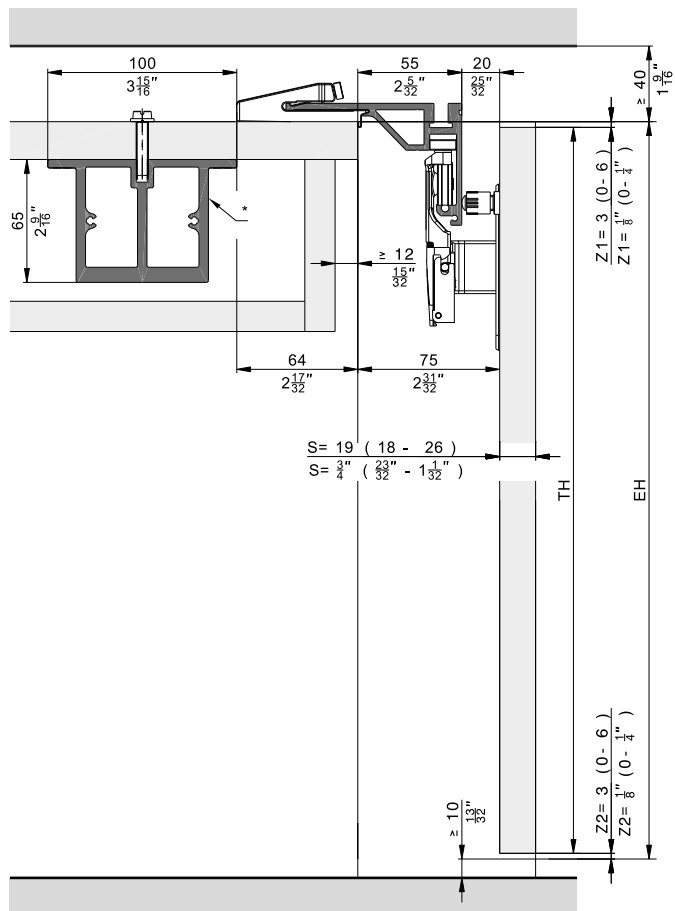


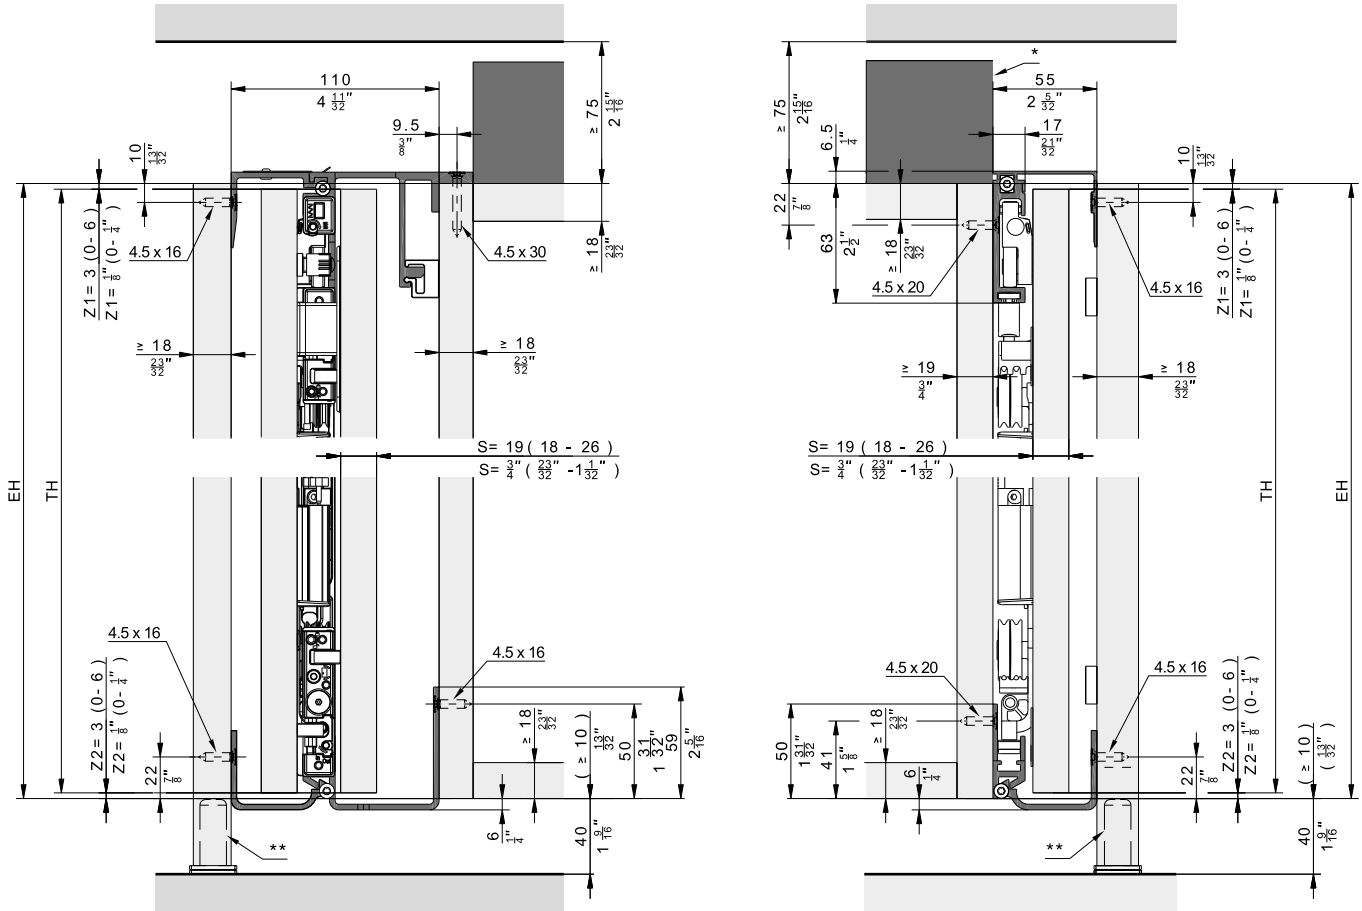Overlay door without base profile, 3 doors






* Reinforcement profile for 3-door and 4-door systems without separating walls

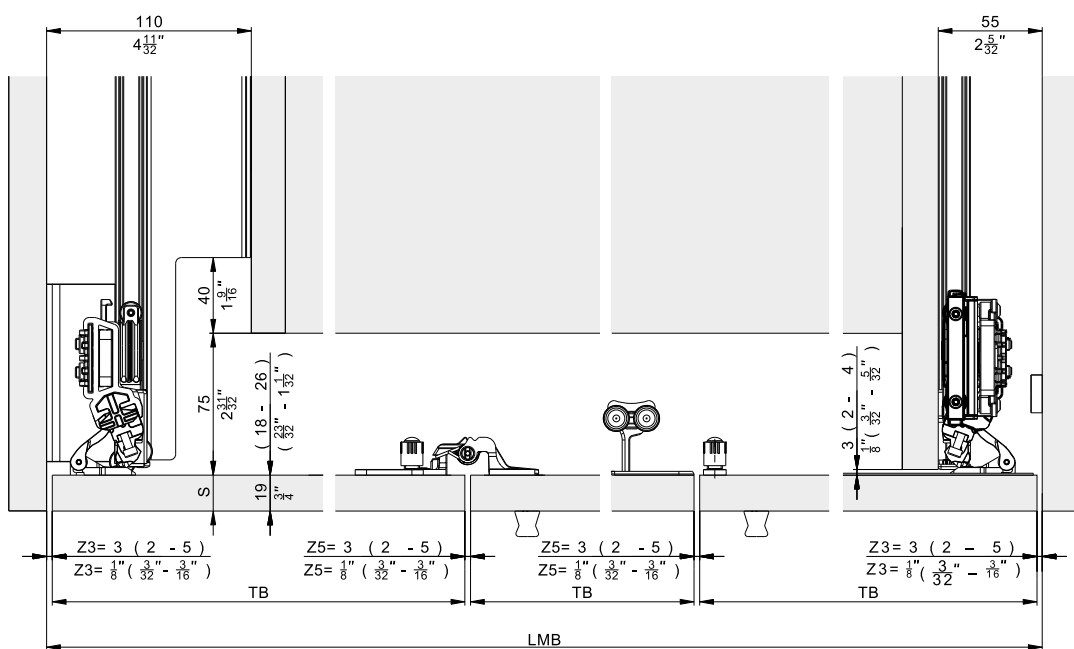** Recommendation: Use adjustable foot




Composed cabinet

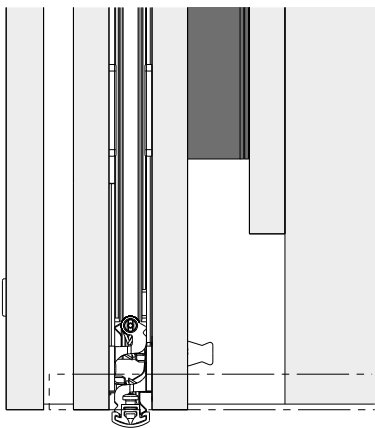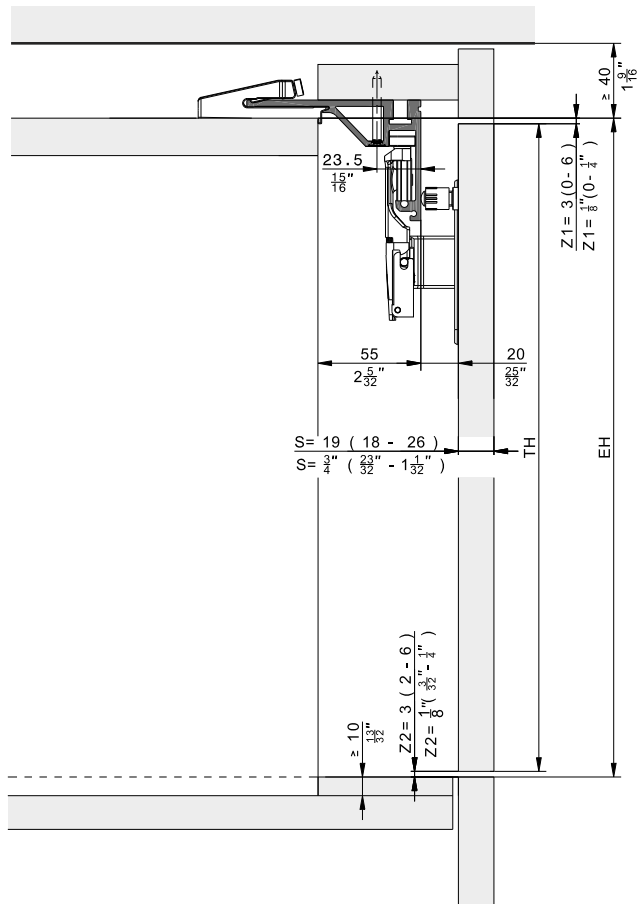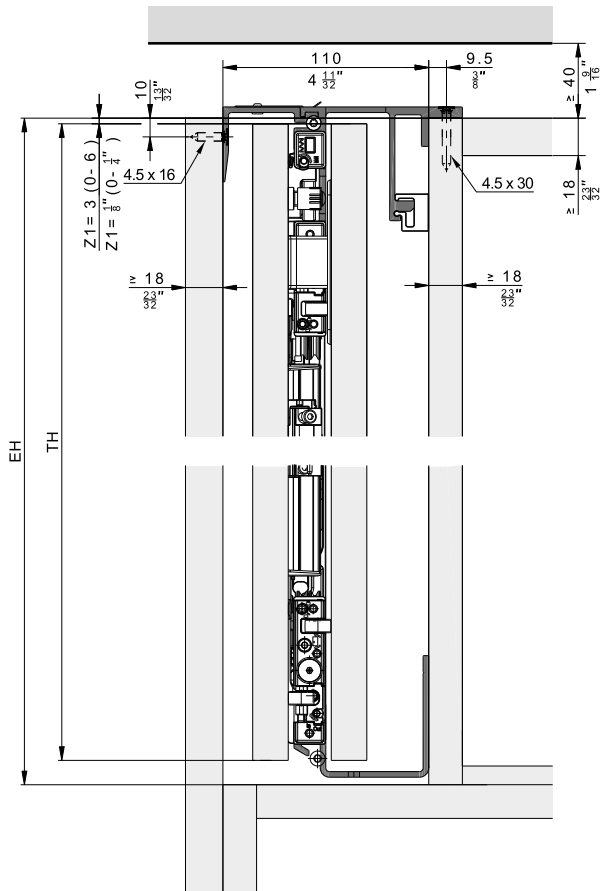


Hardware depth calculation


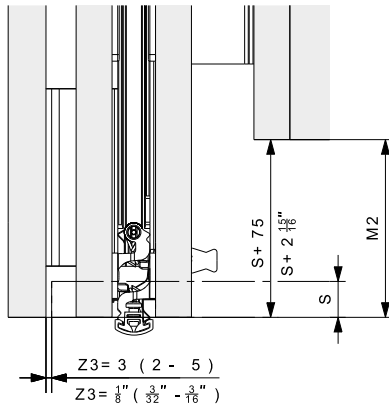
Flush door



	mm	Inch
T2	TB + 92 + Z3 - M2	TB + 3 5/8" + Z3 - M2
KT2	≥ T2	≥ T2
E2	TB - M2	TB - M2
M2 min.	≥ S + 75	≥ S + 2 15/16"
M2 max.	≤ TB - 250	≤ TB - 9 27/32"

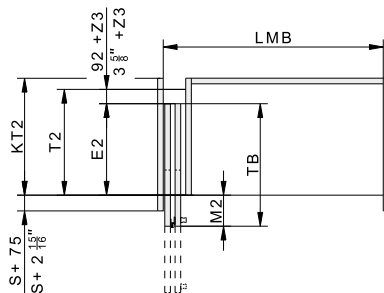

Protruding door

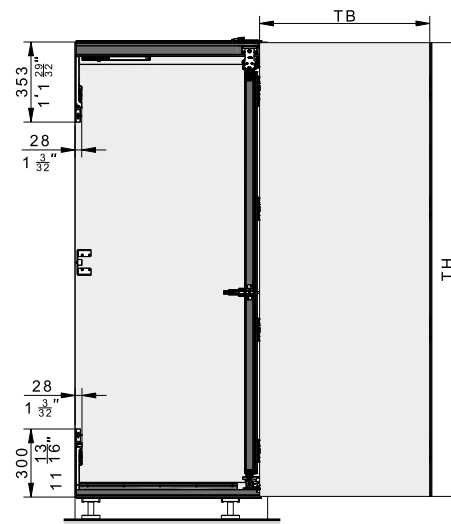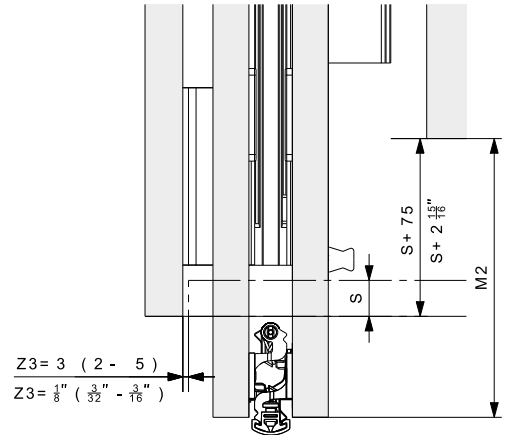

- S = Door thickness
- Z = Gap size
- E2 = Slide-in depth
- T2 = Hardware depth
- TB = Door width
- TH = Door height
- KT2 = Cabinet depth
- LMB = Inside clearance
- M2 = Door projection over cabinet

Installation



Installation



Adjustment



Adjustment



Accessories

- Straightening fitting from page 327

Planning/execution

Configure with just a few clicks at www.hawa.com/configurator

Further information about the product can be found on www.hawa.com.

The right sliding solution on furniture for every need and every idea



On furniture

	Technical specifications					Design/installation								Operation		Recommended application		
Wood																		
Sliding doors																		
Hawa 220 Planfront	70	19-45	2600	400-1500					X		X					X	X	X
Hawa 220 Planfront 70	70	19-45	2600	400-1500					X		X					X	X	X
Hawa Clipo	15/16/ 26/36	16-25	2400	1000	X	X	X	X	X		X					X	X	X
Hawa Clipo 15 H IS	15	16-19	1400	1000		X			X							X	X	
Hawa Clipo 15 H MS	15	16-19	1400	1000			X									X	X	
Hawa Clipo 15 H FS	15	min. 19	1400	1000							X					X	X	
Hawa Clipo 16 H IS	16	16-19	1400	1000	X	X			X							X	X	X
Hawa Clipo 16 H MS	16	16-19	1400	1000	X		X									X	X	X
Hawa Clipo 16 H FS 4-point guidance	16	min. 16	1400	1000	X						X					X	X	X
Hawa Clipo 16 H IS/MS	16	16-19	1400	1000	X				X	X						X	X	X
Hawa Clipo 16 H IS/FS	16	16-19	1400	1000	X				X		X					X	X	X
Hawa Clipo 16 HM IS	16	min. 19	1400	1000	X	X			X							X	X	X
Hawa Clipo 26/36 H IS	26/36	19-25	2200	1000	X	X			X							X	X	X
Hawa Clipo 26 H MS	26	19	2200	1000	X		X				X					X	X	X
Hawa Clipo 36 H MS	36	25	2400	1000	X		X				X					X	X	X
Hawa Clipo 36 HM IS	36	19-25	2400	1000	X	X			X							X	X	X
Hawa Combino	20/35/ 40/50/ 65/80	19-40	2800	1600	X	X	X	X	X	X	X					X	X	X
Hawa Combino 20/35 H IS	65/80	19	2200	1200	X	X			X							X	X	X
Hawa Combino 20/35 H MS	20/35	19	2200	1200	X		X									X	X	X
Hawa Combino 20/35 H FS	20/35	19	2200	1200	X			X								X	X	X
Hawa Combino 50 H MS	50	19-25	2400	1400	X		X									X	X	X



On furniture

	Technical specifications					Design/installation								Operation	Recommended application		
Wood																	
Sliding doors																	
Hawa Combino 50 H FS	50	19-25	2400	1400	X			X							X	X	X
Hawa Combino 65 H IS ol	65	25-40	2600	1400	X	X			X						X	X	X
Hawa Combino 65 H MS ol	65	25	2600	1400	X		X								X	X	X
Hawa Combino 65 H FS ul	65	25	2600	1400	X			X							X	X	X
Hawa Combino 65 H FS ol	65	19-40	2600	1400	X			X							X	X	X
Hawa Combino 80 H FS ul	80	25/40	2800	1600	X			X							X	X	X
Hawa Combino 80 H FS ol	80	19-40	2800	1600	X			X							X	X	X
Hawa Combino L 40	40	19	1500	1500	X			X			X				X	X	X
Hawa Combino L 40 H FS	40	19	1500	1500	X			X			X				X	X	X
Hawa Combino L 40 H FS Synchro	40	19	1500	800				X			X				X	X	X
Hawa Creation (H/G combination)	25	6/19	2200	1200	X				X		X				X	X	X
Hawa Creation 25 H IS/FS	25	19	2200	1200	X				X		X				X	X	X
Hawa Creation 25 GAK/H IS/FS	25	6(19)	2000 (2100)	1000 (1200)	X				X		X				X	X	X
Hawa Frontal	25	19	2000	800	X			X							X	X	X
Hawa Frontal 25 H FS	25	19	2000	800	X			X							X	X	X
Hawa Frontino	20/40	19-25	2400	600-1200	X						X				X	X	X
Hawa Frontino 20 H FS ul	20	19-25	1000	600-1200	X						X				X	X	X
Hawa Frontino 20 H FS ol	20	19-25	1000	600-1200	X						X				X	X	X
Hawa Frontino 20 H OS FS	20	19-25	1000	600-1200	X						X				X	X	X
Hawa Frontino 40 H FS	40	19	2400	600-1200	X						X				X	X	
Hawa Libra	20	16-30	1000	1600					X		X				X	X	X
Hawa Libra 20 H IS/FS	20	16-30	1000	1600					X		X				X	X	X
Hawa Libra 20 H IS/FS Synchro	20	16-30	1000	1600					X		X				X	X	X
Hawa Miniroll	15/25	19-40	2600	1500		X			X						X	X	X
Hawa Miniroll 15/25	15/25	19-40	2600	1500		X			X						X	X	X
Hawa Regal A	25/40	19-50	2500	1200	X						X				X	X	X
Hawa Regal A 25 H FS	25	19-25	2400	1200							X				X	X	X
Hawa Regal A 40 H FS	40	19-50	2500	1200	X						X				X	X	X
Hawa Regal B (H/G combination)	25	16-50	2000	1200	X	X			X		X				X	X	
Hawa Regal B 25 H IS	25	16-50	2000	1200	X	X			X						X	X	X
Hawa Regal B 25 H FS	25	16-50	2000	1200	X						X				X	X	X
Hawa Regal B 25 HG FS	25	4-6 (23-25)	1800	1200	X						X				X	X	X
Hawa Regal B 25 H X FS	25	16-50	2000	1200	X						X						
Hawa Regal C	16/26	16-19	2200	1200	X	X			X		X				X	X	X
Hawa Regal C 16 H IS/FS	16	4/16	1400	1000	X						X				X	X	X
Hawa Regal C 16 H IS	16	19	1400	1000	X				X								
Hawa Regal C 16 HM IS	16	19	1400	1000	X				X						X	X	X
Hawa Regal C 26 HM IS	26	19	2200	1200	X	X			X						X	X	X
Sliding doors, stackable																	
Hawa Aperto	40	19-25	2600	400-900					X			X			X	X	X
Hawa Aperto 40 F	40	19-25	2600	400-900					X			X			X	X	X

Sliding on furniture product overview



On furniture

	Technical specifications					Design/installation							Operation		Recommended application		
Wood																	
Pivot and folding/sliding doors																	
Hawa Concepta III	25/35	18-26	1200-2700	450-750	X				X		X	X	X	X	X	X	X
Hawa Concepta III 25 Push	25	18-26	1200-2200	440-750	X				X		X	X	X		X	X	X
Hawa Concepta III 25 Pull	25	18-26	1200-2200	440-750	X				X		X	X		X	X	X	X
Hawa Concepta III 35 Push	35	18-26	1900-2700	440-750	X				X		X	X	X		X	X	X
Hawa Concepta III 35 Pull	35	18-26	1900-2700	440-750	X				X		X	X		X	X	X	X
Hawa Folding Concepta III	20/25	18-26	1200-2700	440-750					X		X	X	X	X	X	X	
Hawa Folding Concepta III 20 Push	20	18-26	1200-2200	440-750					X		X	X	X		X	X	
Hawa Folding Concepta III 20 Pull	20	18-26	1200-2200	440-750					X		X	X		X	X	X	
Hawa Folding Concepta III 25 Push	25	18-26	1900-2700	440-750					X		X	X	X		X	X	
Hawa Folding Concepta III 25 Pull	25	18-26	1900-2700	440-750					X		X	X		X	X	X	
Hawa Concepta	25/30/ 40/50	19-50	1250-2850	300-900	X				X		X	X		X	X	X	X
Hawa Concepta 25	25	19-50	1250-1850	300-750	X				X	X	X	X		X	X	X	X
Hawa Concepta 30	30	19-50	1851-2300	300-900	X				X	X	X	X		X	X	X	X
Hawa Concepta 40	40	19-50	1851-2500	300-900	X				X	X	X	X		X	X	X	X
Hawa Concepta 50	50	19-50	2301-2850	300-900	X				X	X	X	X		X	X	X	X
Hawa Folding Concepta	25	19-26	1250-2600	300-700					X	X	X	X		X	X	X	
Hawa Folding Concepta 25	25	19-26	1250-2600	300-700					X	X	X	X		X	X	X	
Folding sliding doors																	
Hawa Multifold	30	19-25	2600	200-650					X	X	X	X			X	X	X
Hawa Multifold 30	30	19-25	2600	200-650					X	X	X	X			X	X	X
Hawa Multifold 30/W	30	19-25	2600	200-500					X	X	X	X			X	X	X
Pull-outs																	
Hawa Forte	170/340	16-40	2400	800	X						X			X	X	X	X
Hawa Forte 170	170	16-40	2200	600	X						X			X	X	X	X
Hawa Forte 340	340	16-40	2400	800							X			X	X	X	X
Hawa Forte 170 DS	170	16-40	2200	600	X						X			X	X	X	X



On furniture



On furniture

Technical specifications						Design/installation							Operation		Recommended application		
Glass																	
Sliding doors																	
Hawa Clipo	16/26/36	4-8 (12/22)	2000	1000	X	X			X						X	X	X
Hawa Clipo 16 GK IS	16	6-6.35	1400	1000	X	X			X						X	X	X
Hawa Clipo 16 GS IS	16	6-6.35	1400	1000	X	X			X						X	X	X
Hawa Clipo 16 GPK/GPPK IS	16	6-6.35 (12)	1400	1000	X	X			X						X	X	X
Hawa Clipo 26 GR IS	26	4 (20)	2000	800	X	X			X						X	X	X
Hawa Clipo 36 GPK/GPPK IS	36	6-8 (12)	2000	1000	X	X			X						X	X	X
Hawa Clipo 36 GPPK IS fixed glass	36	6-8 (12)	2000	1000	X	X			X						X	X	X
Hawa Clipo 36 G IS	36	6-8 (20-22)	2000	1000	X	X			X						X	X	X
Hawa Frontal	25	4/6 (20/22)	2200	800	X			X							X	X	X
Hawa Frontal 25 GK FS	25	6	2000	800	X			X							X	X	X
Hawa Frontal 25 GR 20/20 FS	25	4 (20)	2000	800	X			X							X	X	X
Hawa Frontal 25 GR 40/22 FS	25	4 (22)	2000	800	X			X							X	X	X
Hawa Regal A	25	4 (22)	2200	1200							X				X	X	X
Hawa Regal A 25 GR FS	25	4 (22)	2200	1200							X				X	X	X
Hawa Regal B	25	4-8	1800	1200	X						X				X	X	X
Hawa Regal B 25 SP FS	25	4-8	1800	1200	X						X				X	X	X
Hawa Regal 25 GK FS	25	4-6	1800	1200	X						X				X	X	X
Hawa Regal 25 X FS	25	4-8	1800	1200	X						X				X	X	X
Hawa Regal C	16/26	4-6.35 (12/20)	2000	1000	X	X					X				X	X	X
Hawa Regal C 16 GPPK IS	16	6-6.35 (12)	1400	1000	X				X						X	X	X
Hawa Regal C 26 GR IS	26	4 (20)	2000	800	X	X					X				X	X	X

Glass recommendations on furniture

	Float glass	ESG Fully tempered monolithic safety glass	VSG (from float glass) Laminated glass made from float glass	VSG (from ESG) Laminated glass made from tempered safety glass	VSG (from TVG) Laminated glass made from heat-strengthened glass
On furniture					
Hawa Clipo 16 GPK IS Hawa Clipo 16 GPPK IS Hawa Clipo 26 GR IS Hawa Clipo 36 G IS Hawa Clipo 36 GPK IS Hawa Clipo 36 GPPK IS Hawa Clipo 36 GPPK IS Fixed glass	[O]	●			
Hawa Clipo 16 GS IS Hawa Clipo 16 GK IS		●	[O]		

● Recommended by Hawa Sliding Solutions

[O] With restrictions (float glass due to breaking resistance/laminated glass made from float glass due to appearance of glass edges)

□ Application not recommended for aesthetic reasons, since misalignment of up to 4 mm may occur due to technical reasons during production.

Float

Float glass is conventional structural glass that is manufactured using the so-called float process (floating a on a bath of molten tin).

ESG

Fully tempered monolithic safety Glass with a minimum surfacae compresion of 15'000 psi. (DIN EN 12150-1). It is manufactured using special heat treatment. When the glass breaks, tempered safety glass shatters into small blunt-edged fragments. Tempered safety glass has extremely good resilience to breakage, bending resistance, impact resistance and thermal shock resistance.

VSG

Laminated glass (DIN EN 14449) is produced by bonding two or more of glass together by means of one or more extremely flexible polyvinyl butyral (PVB) interlayers (0.38–max. 0.76 mm). When laminated glass breaks, the fragments adhere to the interlayer.

TVG

Heat-strengthened glass is thermally treated float glass and has a breakage pattern similar to glass that has not been thermally treated. It is more resistant to stress and impact than untreated glass.

General information

- Products have been tested in accordance EN 15706 and EN 15570)
- Maximum door weights and door dimensions see respective catalog pages. The maximum door weight may not be exceeded!
- The products are inapplicable for outdoor applications/use.
- With high gloss lacquered doors use material that is at least 20 mm thick, in order to avoid damaging the finish with the screws
- The length dimensions of the standard profiles from the Hawa range are subject to DIN ISO 2768-1 c (+/- 4 mm)
- Subject to technical modifications. No liability assumed.

Door weight calculation Hawa Combino/Hawa Clipo





	Chipboard				MDF			Glass			
Door weights											
D mm	16	19	22	25	16	19	25	4	6	8	
B x H											
500 x 1200	6.6	7.8	8.7	9.9	7.5	8.7	11.4	6.0	9.0	12.0	
500 x 1800	9.9	11.7	13.1	14.9	11.3	13.1	17.1	9.0	13.5	18.0	
600 x 1800	11.9	14.0	15.7	17.8	13.5	15.7	20.6	10.8	16.0	21.6	
600 x 2200	14.5	17.2	19.1	21.8	16.5	19.2	25.1	13.2	19.8	26.4	
600 x 2400	15.8	18.7	20.9	23.8	18.0	20.9	27.4	14.4	21.6	28.8	
800 x 1800	15.8	18.7	20.9	23.8	18.0	20.9	27.4	14.4	21.6	28.8	
800 x 2200	19.4	22.9	25.5	29.0	22.0	25.6	33.5	17.6	26.4	35.2	
800 x 2400	21.1	25.0	27.8	31.7	24.0	27.9	36.5	19.2	28.8	38.4	
1000 x 1200	13.2	15.6	17.4	19.8	15.0	17.4	22.8	12.0	18.0	24.0	
1000 x 2400	26.4	31.2	34.8	39.6	30.0	34.8	45.6	24.0	36.0	48.0	
kg/m²	11.0	13.0	14.5	16.5	12.5	14.5	19.0	10.0	15.0	20.0	

The right sliding solution for every need and every idea

Our overall product range for sliding solutions on buildings, in buildings and on furniture covers all requirements in all areas of application, movement types and sliding versions,

This overall product range will undergo continuous further development, Hawa Sliding Solutions also provides individual, made-to-measure solutions, Special solutions such as this are developed in close collaboration with our partners and customers, Perhaps together with you?

 On buildings	Technical specifications							Design/installation					Operation		Exterior application	
																
Sliding shutters																
Hawa Frontslide	60/100/140	28-60	3200	min. 400	9,6	7500	14,7	X	X	X	X				X	
Hawa Frontslide Matic	60/100/140	28-60	3200	min. 550	6,24	7500	14,7	X	X	X	X				X	
Folding sliding shutters																
Hawa Frontfold	30	28-36	3200	200-600		12000	38,4	X							X	X
Hawa Frontego	30	28-32	700-3200	300-600	1,92	3,6 m	2x12	X							X	X
Special solution, stackable																
Hawa Aperto	60	35-50	2600	550-950	2,47	min. 550	min. 1	X							X	
Windows																
Hawa Vertical	150	85	1200*	3200**					X						X	X

* With a height of 1,200 mm, the width is limited to 2,000 mm because of the pulley

** With a width of 3,200 mm, the height is limited to 900 mm because of the pulley



In buildings

Technical specifications							Installation							Operation		Recommended application			Exterior application	

Wood

Sliding doors

Hawa Junior	40/80/ 100/120 160/250	35–80	4000	3000		40/80/ 100/120	X	X	X	X		X				X	X	X		
Hawa Media	70	35–80	4000	3000			X	X		X						X	X			
Hawa Ordena	70	30–40	2600	3000				X	X	X						X	X			
Hawa Porta	40/45/ 60/100 300/600	18–100	6000	5000		40/60/ 100	X	X	X	X						X	X	X		
Hawa Silenta	150	35–80	4000	3000				X	X	X						X	X			
Hawa Super	500	45–100	6000	5000			X	X		X						X	X	X		
Hawa Suono	100	min. 51	2700	700	1340	X	X			X						X	X	X		

Sliding walls

Hawa Aperto	60	35–50	2600	550–1500	13600			X		X		X				X	X	X	X	
Hawa Junior	80	32–80	4000	500–1200	6750			X		X		X				X	X	X		
Hawa Divido	100	28–30	2400	1200	6000	X	X	X	X	X	X					X	X	X		
Hawa Variotec	150	36–68	4000	700–1500	12000			X		X		X				X	X	X		

Folding sliding walls

Hawa 20 c Folding wall	120	42–80	4000	1000	7000			X		X		X				X	X	X		
Hawa Centerfold	80	35–45 (57)	4000	500–900	6000			X	X	X		X				X	X	X		
Hawa Variofold	80	35–45 (57)	4000	500–900	6310			X	X	X		X				X	X	X		

Transport systems

Hawa Varioflex	40	35–80	4000	900				X		X							X			
----------------	----	-------	------	-----	--	--	--	---	--	---	--	--	--	--	--	--	---	--	--	--

Glass

Sliding doors

Hawa Junior	40/80/ 100/120 160/250	8–16	4000	3000		40/80/ 100/120	X	X	X	X						X	X	X		
Hawa Ordena	70	8–10.7	2600	600–3000				X	X	X						X	X	X		
Hawa Porta	40/100	6–12.7	2700	1600		40/60/ 100	X	X	X	X						X	X	X		
Hawa Puro	150	8–12.7	3000	750–3000				X	X	X						X	X	X		
Hawa Purolino Plus	80	8–12.7	3000	600–3000		X	X	X	X	X						X	X	X		
Hawa Super	250	8–80	4000	3000			X	X		X							X	X		

Sliding walls

Hawa Aperto	60	8–10 (30)	2600	500–1100	10900			X		X		X				X	X	X	X	
Hawa Divido	100	5.9–10 (30)	2750	1200	6000	X	X	X	X	X	X					X	X	X		
Hawa Shopfront	400	8–16 (50)	3500	3000	12000			X		X							X	X	X	
Hawa Variotec	150	10–13 (36)	3500	700–1500				X		X		X					X	X	X	

Folding sliding walls

Hawa Centerfold	80	10–13 (36)	2600	500–900	6000			X	X	X		X					X	X	X	
Hawa Variofold	80	10–13 (36)	2600	400–900	6310			X	X	X							X	X	X	
Hawa Junior	80	8–16 (26)	3000	500–1200	3700			X		X		X				X	X	X		

Shower

Hawa Banio	40	8–9	2200	800	1500	X	X			X						X	X	X		
------------	----	-----	------	-----	------	---	---	--	--	---	--	--	--	--	--	---	---	---	--	--



On
furniture

		Technical specifications					Design/installation							Operation		Recommended application		
Wood																		
Sliding doors																		
Hawa 220 Planfront	70	19–45	2600	400–1500					X			X	X			X	X	X
Hawa Aperto	40	19–25	2600	400–900					X							X	X	X
Hawa Clipo	15/16/ 26/36	10–25	2400	1200	X	X	X	X	X			X				X	X	X
Hawa Combino	20/35/ 40/50/ 65/80	19–40	2800	1600	X	X	X	X				X				X	X	X
Hawa Creation	65/80	6/19	2200	1200	X	X		X								X	X	X
Hawa Frontal	25	19	2000	800	X			X								X	X	X
Hawa Frontino	20/40	19–25	2400	600–1200	X							X				X	X	X
Hawa Libra	20	16–30	1000	1600					X			X				X	X	X
Hawa Miniroll	15/25	19–40	2600	1500		X										X	X	X
Hawa Regal A	25/40	19–50	2500	1200	X							X				X	X	X
Hawa Regal B	25	16–50	2000	1200	X	X			X			X				X	X	X
Hawa Regal C	16/26	16–19	2200	1200	X	X			X			X				X	X	X
Pivot and folding/sliding doors																		
Hawa Concepta III	25/35	18–26	1200–2700	440–750	X				X			X	X	X	X	X	X	X
Hawa Folding Concepta III	20/25	18–26	1200–2700	440–750					X			X	X	X	X	X	X	
Hawa Concepta	25/30/ 40/50	19–50	1250–2850	300–900	X				X	X	X	X		X		X	X	X
Hawa Folding Concepta	25	19–26	1250–2600	300–700					X	X	X	X		X		X	X	
Folding sliding doors																		
Hawa Multifold	30	19–25	2600	200–650					X	X	X					X	X	X
Pull-outs																		
Hawa Forte	170/340	16–40	2400	800	X							X			X	X	X	X
Glass																		
Sliding doors																		
Hawa Clipo	16/26/36	4–8 (12/20)	2000	1000	X	X			X							X	X	X
Hawa Frontal	25	4/6 (20/22)	2200	800	X			X								X	X	X
Hawa Regal A	25	4 (22)	2200	1200								X				X	X	X
Hawa Regal B	25	4–8	1800	1200	X							X				X	X	X
Hawa Regal C	16/26	4–6.35 (12/20)	2000	1000	X	X						X				X	X	X

Index icons

Area of application



On buildings



In buildings



On furniture

Technical specifications



Weight



Thickness



Height



Width



Soft closing mechanism



Max. area per door



Max. system width



Max. area



Max. opening width

Design



IS Inslide



MS Mixslide



FS Forslide



IS Inslide
Flush-fitting/
on one level



MS Mixslide
Flush-fitting/
on one level



FS Forslide
Flush-fitting/
on one level

Installation



Fully opening



Half opening



Wall mounting



Ceiling mounting



Ceiling mounting
recessed



ol
Top-running



ul
Bottom-running

Operation



Push



Pull

Recommended application



Load
Light load
Private access



Load
Medium load
Semi-public access



Load
High load
Public access



Inland
More than 20 km
from the coast



Coastal area
Less than 20 km
from the coast



Inspiring sliding solutions on furniture

Product overview and details



Inspiring sliding solutions on furniture

Hawa Concepta III

Hawa Folding Concepta III

8 Solutions for wood applications

154 Hawa Concepta III

156 Hawa Concepta III 25 Push

163 Hawa Concepta III 25 Pull

170 Hawa Concepta III 35 Push

177 Hawa Concepta III 35 Pull

184 Hawa Folding Concepta III

186 Hawa Folding Concepta III 20 Push

201 Hawa Folding Concepta III 20 Pull

216 Hawa Folding Concepta III 25 Push

231 Hawa Folding Concepta III 25 Pull



Designed for everyday usability

Design is a product performance that you can see, but one you don't have to see. Sliding solutions on furniture are highly functional and yet mostly invisible. This is value they add to the daily use of beautiful furniture.

Wooden pivot and folding/sliding doors

Pivot and folding/sliding doors are the magicians among furniture doors. They make push-pulling wooden cabinet fronts disappear or reappear with a single movement, can be parked away in barely visible niches, and run into the cushioned end position independently. This opens up creative application options for doors and gateways: from the pop-up home office to the utility room in the bathroom and the kitchen in the living room.



Discover our fitting solutions for wooden pivot and folding/sliding doors from **Page 154**



Hawa Concepta III for wooden pivot/slide-in doors

Flowing transitions make rooms more flexible than ever before

Hawa Concepta III supports the trend towards open living spaces, and creates transitions from kitchen to living room or from workplace to living area in a more fluid way than ever before.

Doors of any size can be pivoted, slid in sideways and parked in an extremely small space, almost in the blink of an eye.

They can then be brought out again with a gentle tap and closed flush with the surface, so that all that remains visible of the kitchen is an aesthetic front. This works so easily and intuitively that it is even possible to dispense with handles.

We weren't just thinking about the users during the development of the Hawa Concepta III: The system impresses with its simplicity, even during installation and adjustment. This is all based on technology that is just as invisible as a kitchen that is currently not in use.



Area of application

Cabinet constructions for multi-functional use of rooms which contain kitchens, home offices, washer/dryer combinations and storage space, which are freely accessible and disappear behind the cabinet front with pivot / slide-in hardware if required.

System advantages

-  **Flexibility** Variable door dimensions: **half-height to floor-to-ceiling solutions** possible, including **walk-on solutions**
-  **Productivity** **Easy installation** thanks to high degree of pre-assembly
Intuitive adjustment with easily accessible adjustment points
-  **Comfort** **Ergonomic movement support** for even, smooth movement
Opening and closing with very little effort – one hand is enough
-  **Aesthetics** Uniform, **flush front design** with even gap pattern
Allows constructions **with and without a handle** – the **technology remains invisible**

Technical specifications


	max.	25 / 35 kg
		1200 – 2700 mm
		440 – 750 mm
		18 – 26 mm

Good to know (accessories)


- Connector makes overlaid furniture structures possible
- Straightening fitting for doors

Installation examples

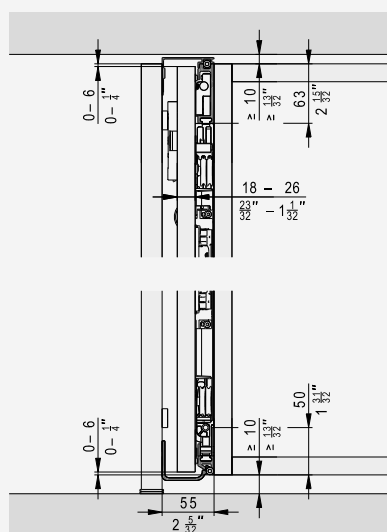
Hawa Concepta III 25/35 Push




Hawa Concepta III 25/35 Pull

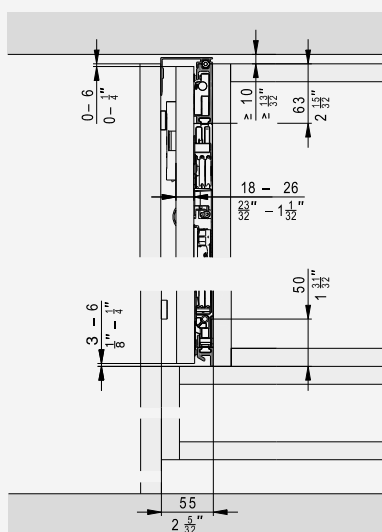


Hawa Concepta 25/35 Push

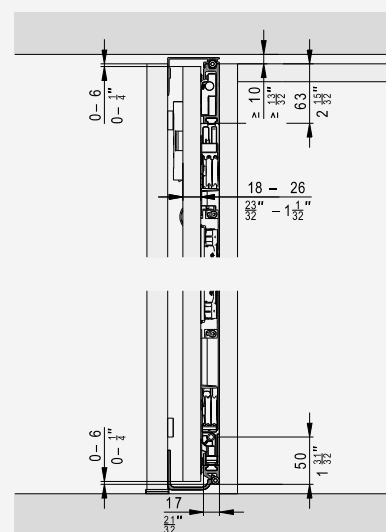


Door striking against the top and bottom cabinet sections



Composed cabinet overlay doors



Overlay door without base

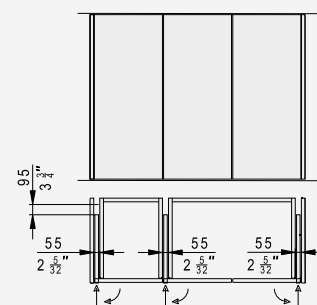

Fitting for pivoting and lateral sliding in of wooden doors up to 25 kg (55 lbs.). Uniform, flush front design with even gap pattern. Push-to-open function for handle-less cabinet designs.

Product highlights



Productivity

Easy installation thanks to high degree of pre-assembly with intuitive adjustment



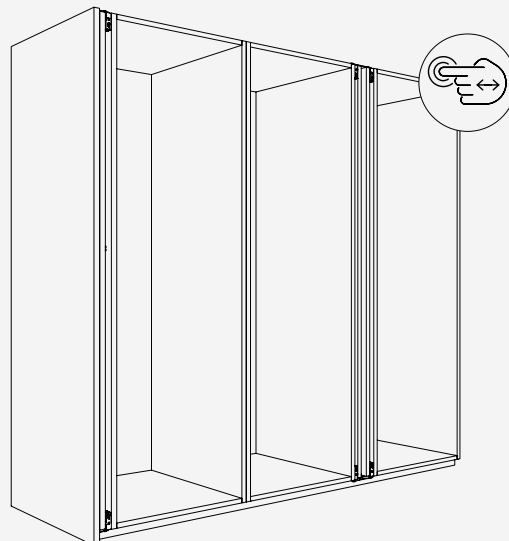
Comfort

Ergonomic movement support for even, smooth movement



Aesthetics

Cabinet designs without handle – the technology remains invisible



Technical specifications



6–25 kg (13 to 55 lbs.)



1200–2200 mm (3' 11 1/4" to 7' 2 5/8")



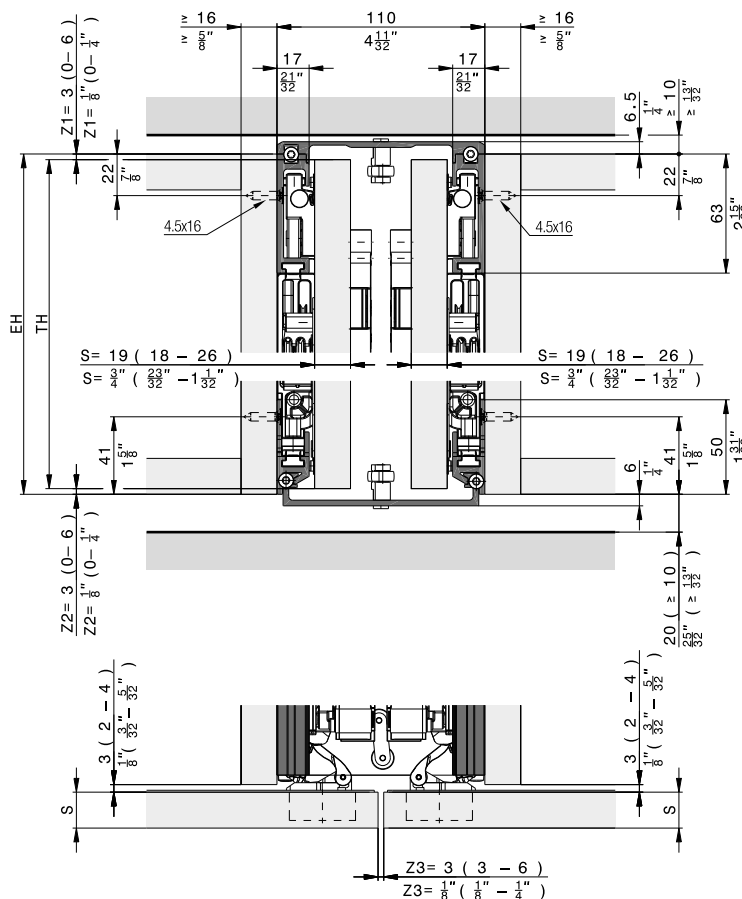
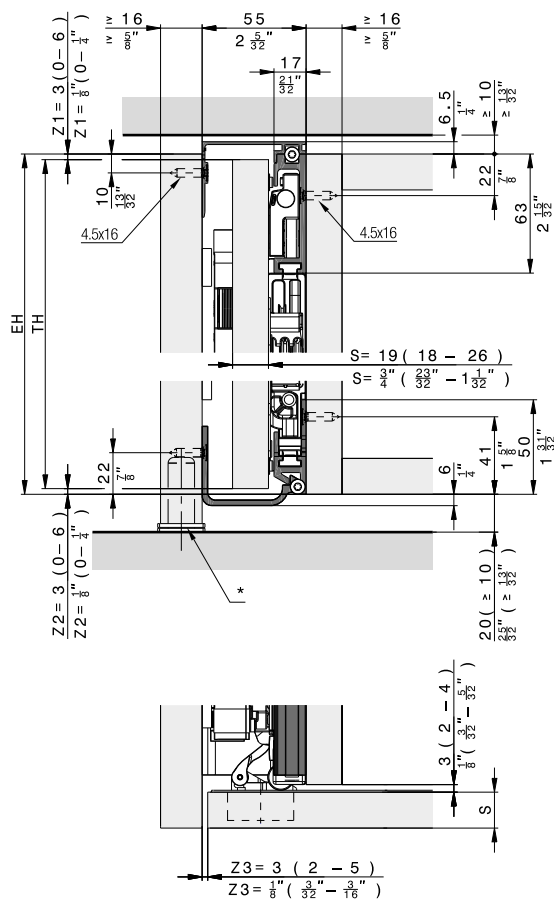
440–750 mm (1' 5 5/16" to 2' 5 17/32")



18–26 mm (23/32" to 1 1/32")



Installation examples

Door striking against the top and bottom cabinet sections



* Recommendation: Use adjustable foot

Components required for one cabinet



Hawa Concepta III 25 Push, left

No.	
30994	Hawa Concepta III 25 Push/Pull, basic set left, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
30998	Hawa Concepta III 25/35 Push, slide-in set, left
30778	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")

Hawa Concepta III 25 Push, right

No.	
30995	Hawa Concepta III 25 Push/Pull, basic set right, door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8")
30999	Hawa Concepta III 25/35 Push, slide-in set, right
30778	Upright profile, for door height 1200–2200 mm (3' 11 1/4" to 7' 2 5/8"), aluminum, anodized, L= 1974 mm (6' 5 23/32")

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm						
		440	500	550	600	650	700	750
Door height in mm	2200	25	25	25	25	25	25	24
	2150	25	25	25	25	25	25	23
	2100	25	25	25	25	25	24	23
	2050	25	25	25	25	25	24	22
	2000	25	25	25	25	25	23	21
	1950	25	25	25	25	24	22	21
	1900	25	25	25	25	23	21	20
	1850	25	25	25	24	22	21	19
	1800	25	25	25	23	21	20	19
	1750	25	25	25	22	21	19	18
	1700	25	25	24	22	20	19	17
	1650	25	25	23	21	19	18	17
	1600	25	24	22	20	18	17	16
	1550	25	23	21	19	18	16	15
	1500	24	22	20	18	17	16	15
	1450	23	21	19	17	16	15	14
	1400	22	20	18	17	15	14	13
	1350	21	19	17	16	15	14	13
	1300	20	18	16	15	14	13	12
	1250	19	17	15	14	13	12	11
	1200	18	16	15	13	12	11	11
		Door weight in kg						

		Door width in inch						
		1' 5 ⁵ / ₁₆ "	1' 7 ¹¹ / ₁₆ "	1' 9 ²¹ / ₃₂ "	1' 11 ⁵ / ₈ "	2' 1 ¹⁹ / ₃₂ "	2' 3 ⁹ / ₁₆ "	2' 5 ¹⁷ / ₃₂ "
Door height in inch	7' 2 ⁵ / ₈ "	55	55	55	55	55	55	53
	7' ²¹ / ₃₂ "	55	55	55	55	55	55	51
	6' 10 ¹¹ / ₁₆ "	55	55	55	55	55	53	51
	6' 8 ²³ / ₃₂ "	55	55	55	55	55	53	49
	6' 6 ³ / ₄ "	55	55	55	55	55	51	46
	6' 4 ²⁵ / ₃₂ "	55	55	55	55	53	49	46
	6' 2 ¹³ / ₁₆ "	55	55	55	55	51	46	44
	6' ²⁷ / ₃₂ "	55	55	55	53	49	46	42
	5' 10 ⁷ / ₈ "	55	55	55	51	46	44	42
	5' 8 ²⁹ / ₃₂ "	55	55	55	49	46	42	40
	5' 6 ¹⁵ / ₁₆ "	55	55	53	49	44	42	37
	5' 4 ³¹ / ₃₂ "	55	55	51	46	42	40	37
	5' 3"	55	53	49	44	40	37	35
	5' 1 ¹ / ₃₂ "	55	51	46	42	40	35	33
	4' 11 ¹ / ₁₆ "	53	49	44	40	37	35	33
	4' 9 ³ / ₃₂ "	51	46	42	37	35	33	31
	4' 7 ¹ / ₈ "	49	44	40	37	33	31	29
	4' 5 ⁵ / ₃₂ "	46	42	37	35	33	31	29
	4' 3 ³ / ₁₆ "	44	40	35	33	31	29	26
	4' 1 ⁷ / ₃₂ "	42	37	33	31	29	26	24
	3' 11 ¹ / ₄ "	40	35	33	29	26	24	24
		Door weight in lbs.						

Hawa Configurator

www.hawa.com/configurator