

Disassemble instructions

The preparation of the instruments:

Instruments: cross screwdriver($\phi 5\text{mm}$) 1pcs





1. Whole lamp



2. Loosen M4 screws on the cover, take off the cover and tempered glass.



3. Loosen M3 screws on the lens, take off the lens and pcb board.

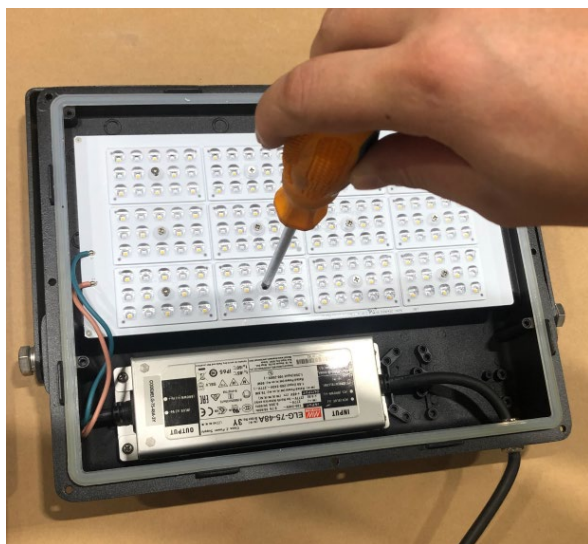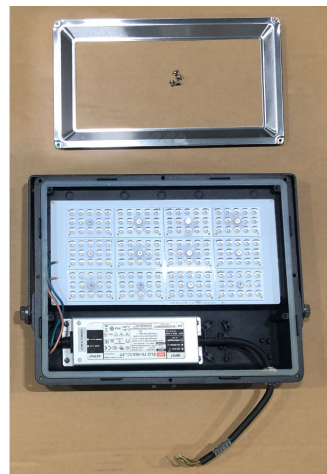

4. Light source module, Heat sink, Tempered glass, Lens.

