




MONOBLOCK ELBOW

Elbow of the same geometry as the A-80 valves for surface mounting where a shut-off valve is not required.

- European Brass, DW (4MS) quality for use in drinking water installations.
- Easy installation thanks to its design with two planes in the body.
- Strong one-piece body construction for secure installations.
- Longer valve life span: Consistent wall thickness in the curved área.
- Includes stainless steel rosette to cover imperfections in the enclosure.

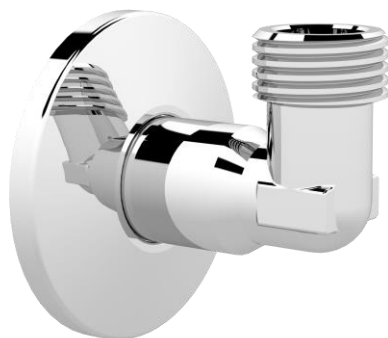

TECHNICAL SHEET MONOBLOCK ELBOW

PRODUCT DESCRIPTION

One-piece elbow with the same dimensions as an A-80, designed to connect to a flexible and avoid bending of it. By its size and cross section, it does not reduce the flow rate.


PRODUCT SCOPE

Outlets for therms and instant heaters, as well as any installation that does not require an appliance key. Sanitary hot and cold water plumbing installations.

GENERAL DIMENSIONS, PRESSURE AND TEMPERATURE


Code	Size	A (mm)	B (mm)	C (mm)	PN (BAR)	Temp. (°C)*
B3152	1/2X3/8	56	48	24	16	0 to 95
B3160	1/2X1/2	56	48	24	16	0 to 95

* Freezing is excluded.

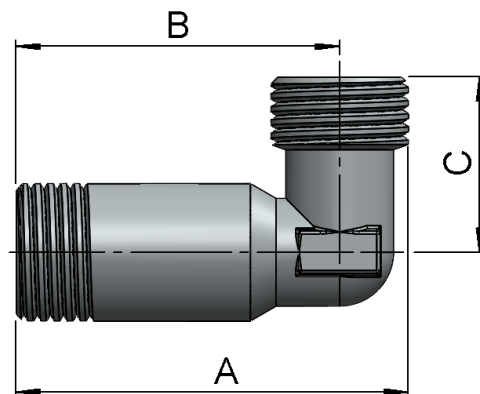

MATERIALS

Item	Component	Material	Finishing
1	Rosette	Stainless steel	-
2	Body	Brass CW617N	Chrome plated

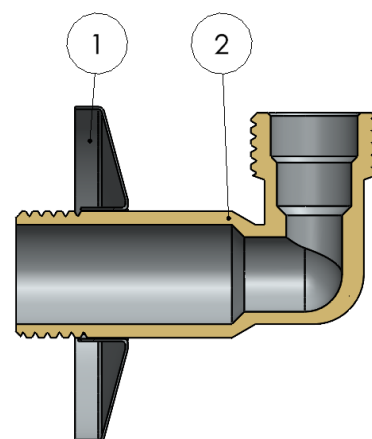



TECHNICAL DATA

Compatibility with fluids

Fluid	Compatibility
Drinking water and domestic hot water	Excellent

For any other fluid, please contact Arco technical service.

INSTALLATION AND OPERATION INSTRUCTIONS

Before performing any action, the water supply to the installation should be shut off. Make sure there is no dirt or foreign objects in the connection to the network. Apply the appropriate sealing material to the inlet thread of the elbow. The elbow should be installed with a suitable tool, preferably with a wrench to hold the body. The tool should act on the flat surfaces of the elbow body to avoid deforming this area due to excessive pressure from the tool.

Restore the water supply and check the tightness of all connections before fixing the elbow to service.



All products have an environmental impact during its life cycle, even once retired. All the components of this product can be recycled. Once the use is over, leave the valve in any recycling green point. Válvulas Arco reserves the right to change the product or any of its technical specifications without prior notice.

FT01200ING – Edition 2024-12