


FOCUS ON

Neso The Magnetic Track System

















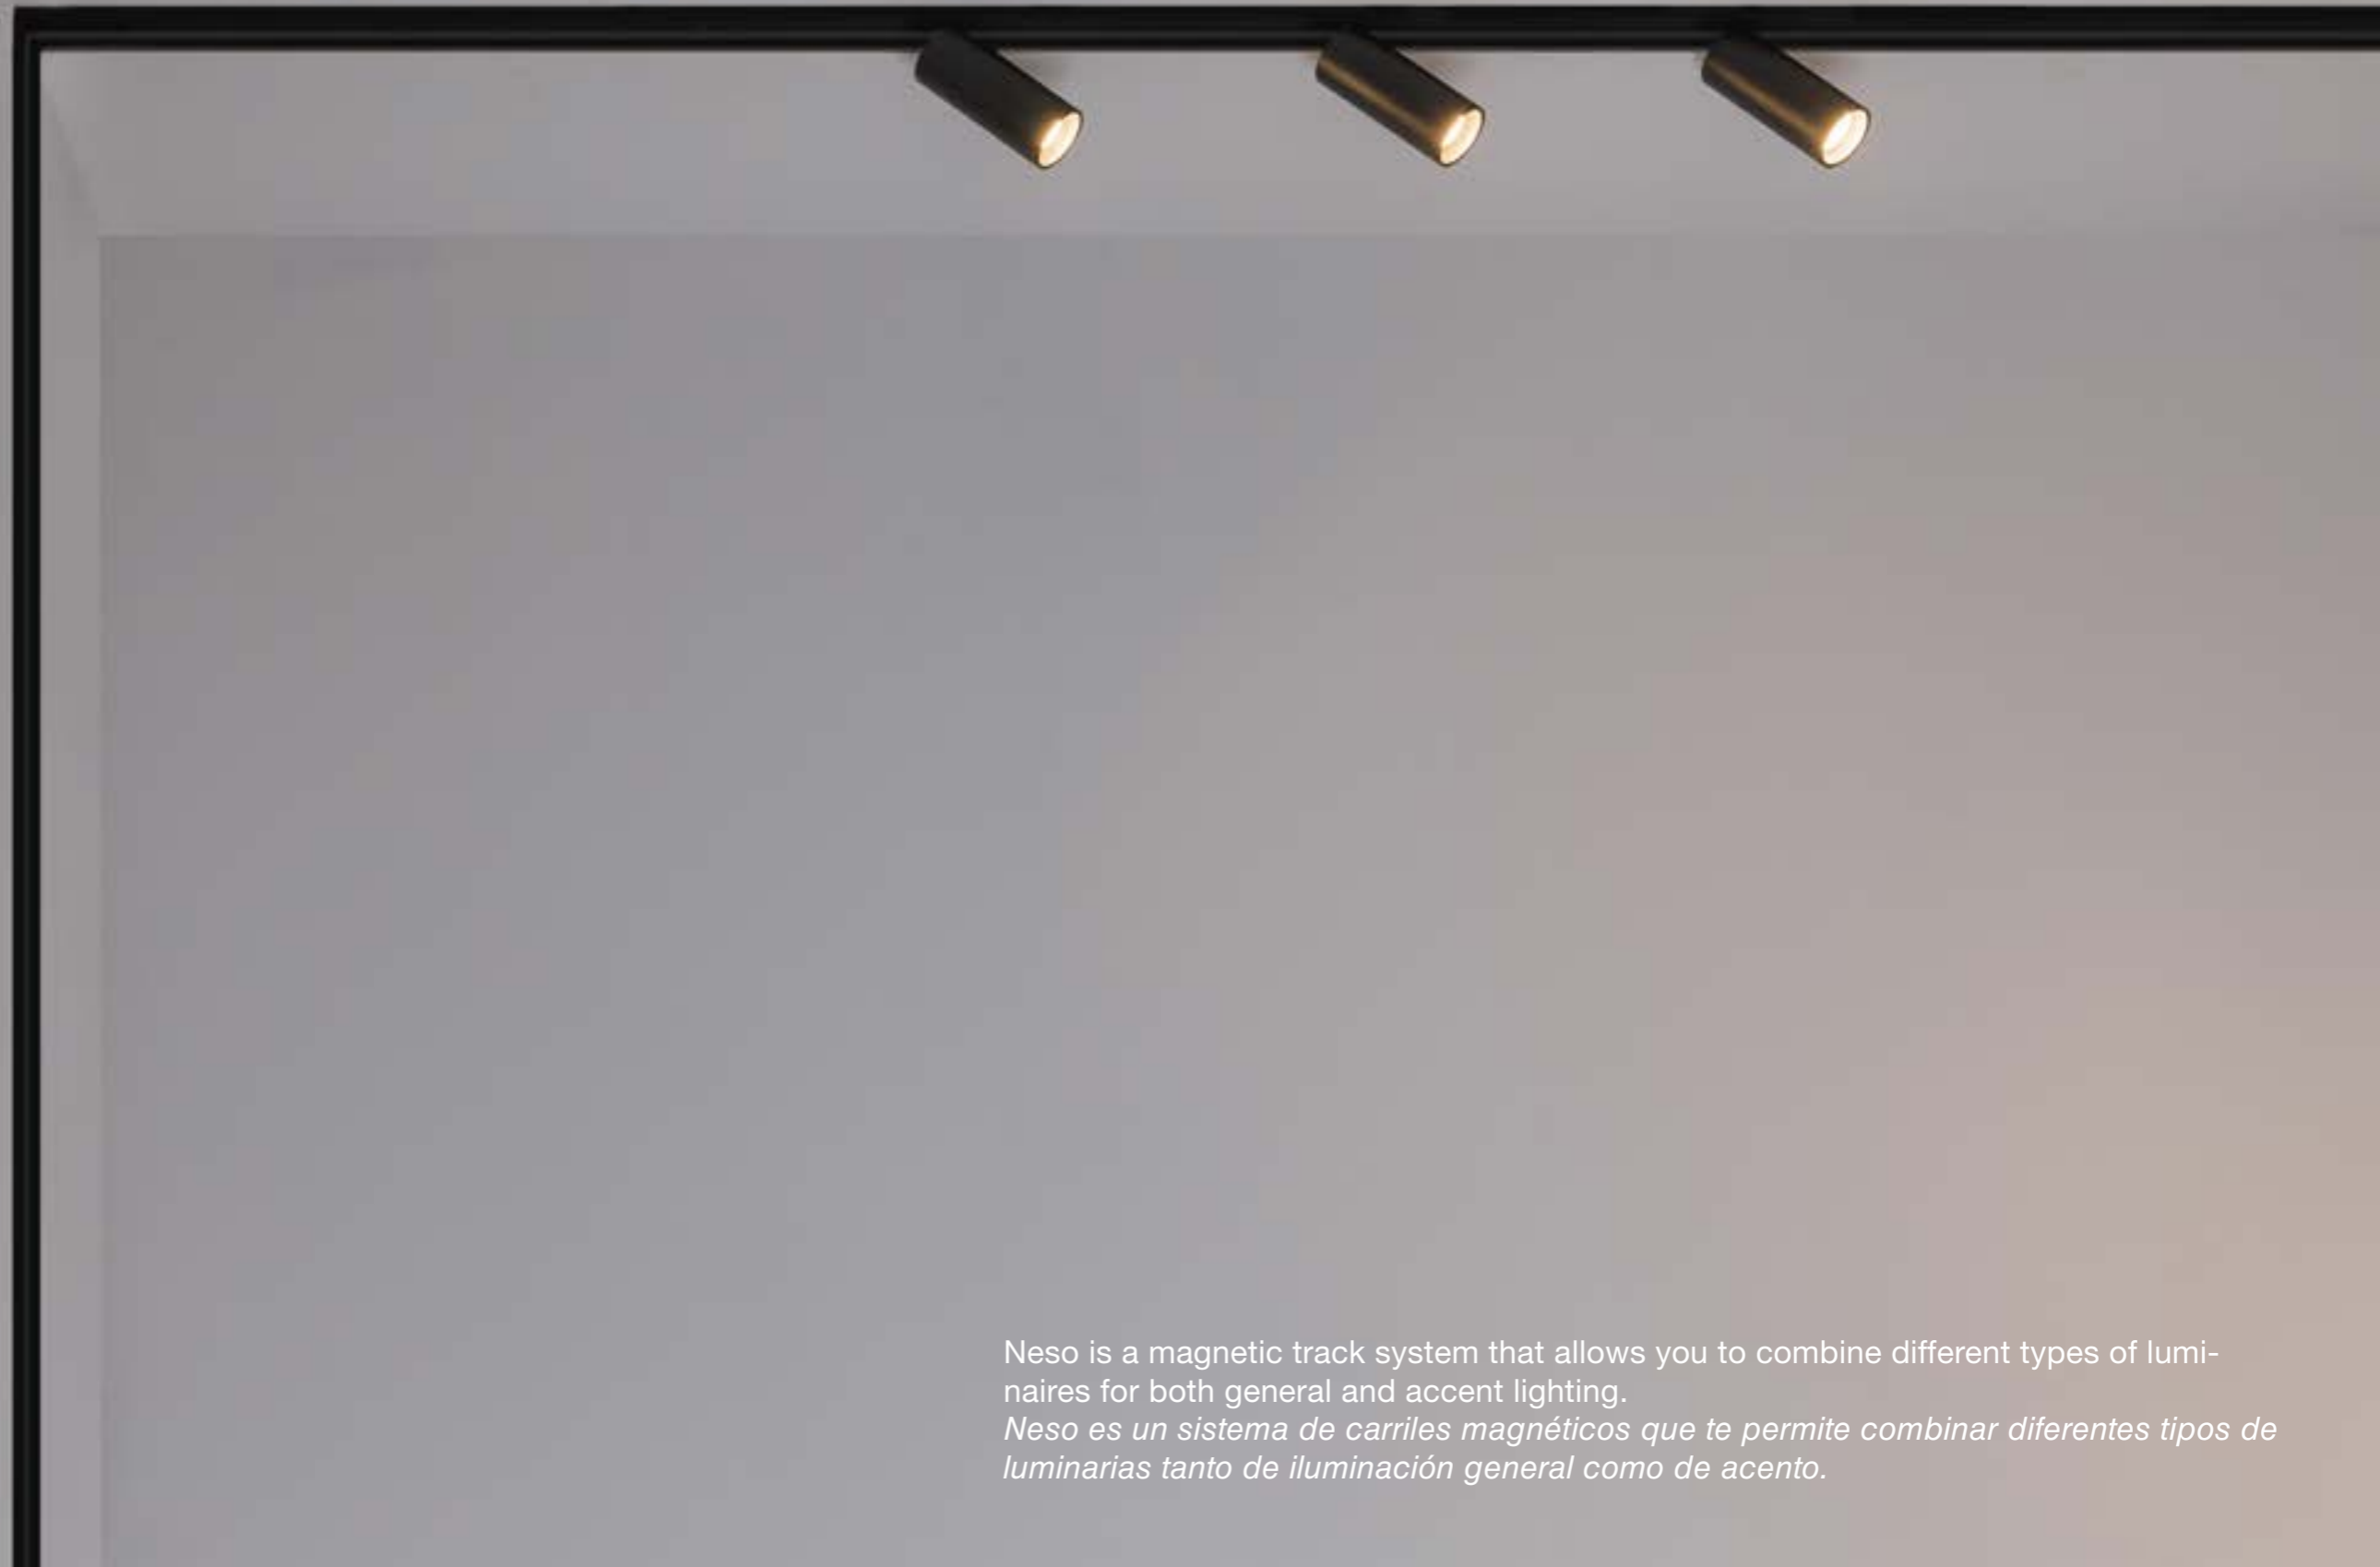


Neso is a magnetic track system that allows you to combine different types of luminaires for both general and accent lighting.




Neso es un sistema de carriles magnéticos que te permite combinar diferentes tipos de luminarias tanto de iluminación general como de acento.



	TRACKS Carriles		
	RECESSED Empotrable	SURFACE Superficie	PENDANT Colgante
			
	1000 2000	1000 2000	1000 2000
	MODULES Módulos		
Neso Point			
	84	164	320
Neso Unik			
	ø150	ø150	
Neso Line			
	320	640	
Neso Hole			
	ø35	ø50	
Neso Top			
	ø35		
	FINISH Acabado		
	● Black Negro	○ White Blanco	
	COLOR TEMPERATURE Temperatura de color		
	2700K CRI>90	3000K CRI>90	
	CONTROL SYSTEM Sistema de Control		
			

CONFIGURE YOUR NESO

Also for your mobile phone
También para tu teléfono móvil

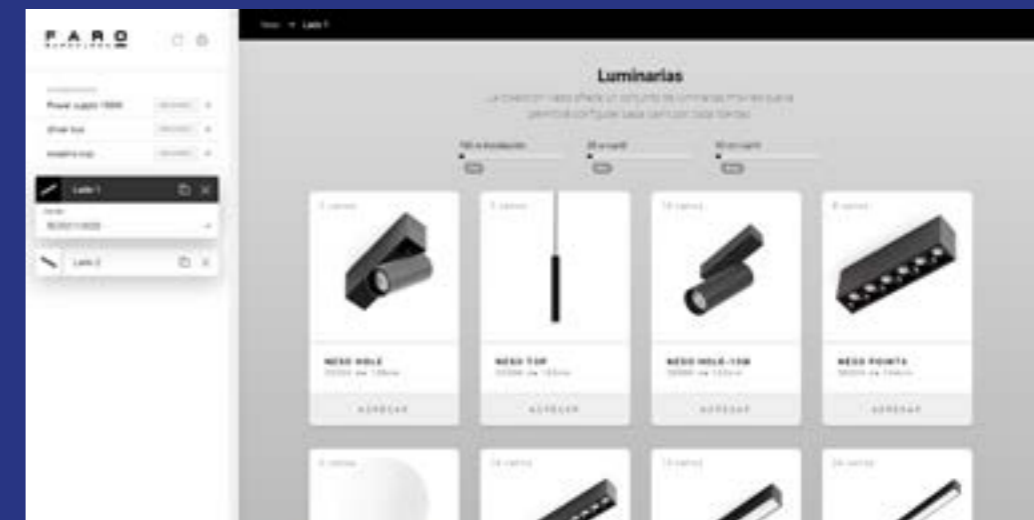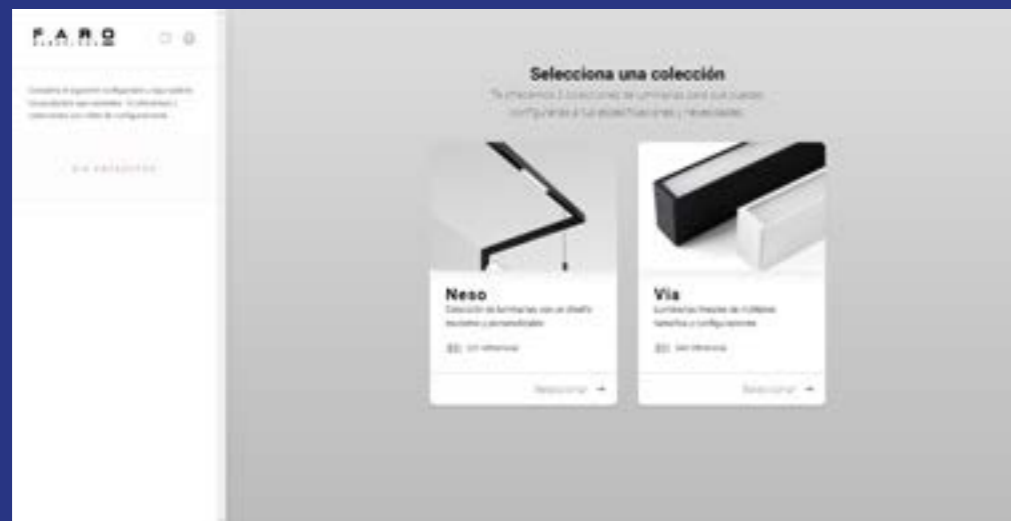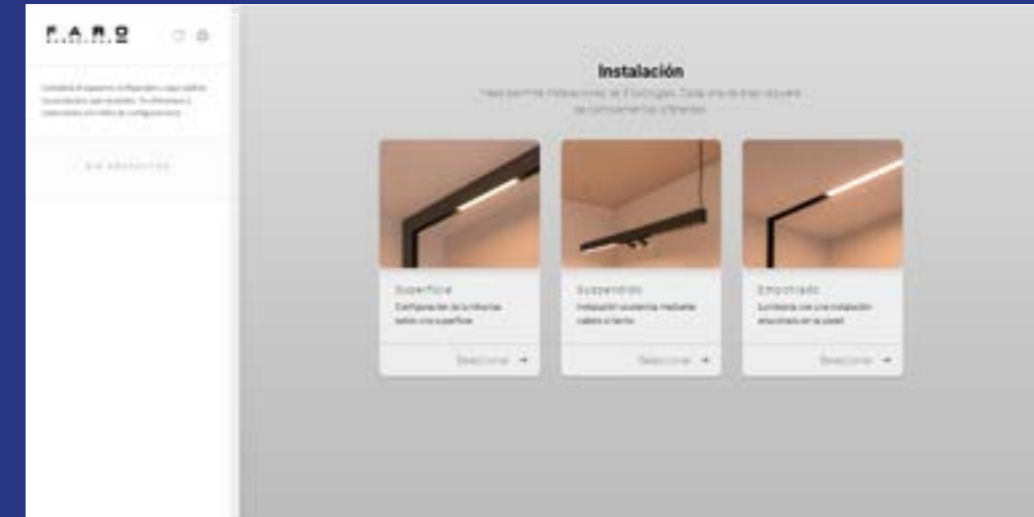

Highlights

Neso integrates perfectly into the architecture. You can install it on the ceiling or wall and make all the combinations you want.


Neso se integra perfectamente en la arquitectura. Puedes instalarlo en techo o pared y hacer todas las combinaciones que quieras.



Magnetic
Magnético



Versatility
Versatilidad



UGR<16 Option



Connectivity
Conectividad

The Magnetic Track System

FOCUSON





Detail Studio Photo by Julien Chamoux Photographie



Needs consulting
for your project?
¿Necesitas
asesoramiento
para tu proyecto?



tracks



1 Surface *Superficie*



2 Recessed *Empotrable*

Tracks are available for recessed, suspended and surface installation.

Los carriles están disponibles para instalación empotrada, suspendida y de superficie.



3 Suspended *Suspendida*






Neso allows the integration of lighting in any type of architecture. The luminaires are attached to the rail by means of magnets. This makes it very easy to change their position. Imagination and creativity to power!
Neso permite la integración de la iluminación en cualquier tipo de arquitectura. las luminarias se fijan al carril mediante imanes. Esto hace que sea muy fácil cambiarlas de posición. ¡Imaginación y creatividad al poder!

magnetic fixing

NESO POINT 3L


no incl. 50.000HS L70/B10 MACADAM 3 24V 850°C UGR <16



Family	Color T°	Beam Angle	Finish
50101 Point 3L 4W	927 2700K 220lm CRI>90	1 12°	1 White
	930 3000K 250lm CRI>90	2 34°	2 Black

NESO POINT 6L


no incl. 50.000HS L70/B10 MACADAM 3 24V 850°C UGR <16



Family	Color T°	Beam Angle	Finish	Control System
50102 Point 6L 8W	927 2700K 490lm CRI>90	1 12°	1 White	<input type="checkbox"/> W CASAMBI <input type="checkbox"/> D DALI <input type="checkbox"/> ON/OFF
	930 3000K 510lm CRI>90	2 34°	2 Black	

NESO POINT 12L

no incl. 50.000HS L70/B10 MACADAM 3 24V 850°C UGR <16



Family	Color T°	Beam Angle	Finish	Control System
50103 Point 12L 16W	927 2700K 810lm CRI>90	1 12°	1 White	<input type="checkbox"/> W CASAMBI <input type="checkbox"/> D DALI <input type="checkbox"/> ON/OFF
	930 3000K 850lm CRI>90	2 34°	2 Black	


The Magnetic Track System

FOCUSON



NESO LINE 32cm


no incl. 50.000HS L70/B10   24V 



Family	Color T°	Finish	Control System
50104 Line 32cm 13W	927 2700K 550lm CRI>90 930 3000K 590lm CRI>90	01 White 02 Black	  ON/OFF

NESO LINE 64cm

no incl. 50.000HS L70/B10   24V 






Family	Color T°	Finish	Control System
50105 Line 64cm 26W	927 2700K 930lm CRI>90 930 3000K 970lm CRI>90	01 White 02 Black	  ON/OFF



NESO HOLE ø3.5cm


no incl. 50.000HS L70/B10   24V 





Family	Color T°	Beam Angle	Finish	Control System
50107 Hole ø35cm 5W	927 2700K 330lm CRI>90	1 20°	1 White	  ON/OFF
	930 3000K 360lm CRI>90	2 40°	2 Black	

NESO HOLE ø5cm

no incl. 50.000HS L70/B10   24V 



Family	Color T°	Beam Angle	Finish	Control System
50108 Hole ø50cm 10W	027 2700K 705lm CRI>90	1 18°	1 White	  ON/OFF
	030 3000K 735lm CRI>90	2 36°	2 Black	


The Magnetic Track System

FOCUSON



NESO UNIK


no incl. 50.000HS L70/B10 MACADAM 3 24V 850°C



Family	Color T°	Finish	Control System									
50108 Unik 5W	927 2700K 330lm CRI>90 930 3000K 360lm CRI>90	01 White 02 Black	<table border="1"> <tr><td>N</td><td>W</td><td>CASAMBI</td></tr> <tr><td></td><td>D</td><td>DALI</td></tr> <tr><td></td><td></td><td>ON/OFF</td></tr> </table>	N	W	CASAMBI		D	DALI			ON/OFF
N	W	CASAMBI										
	D	DALI										
		ON/OFF										

NESO UNIK


no incl. 50.000HS L70/B10 MACADAM 3 24V 850°C



Family	Color T°	Finish	Control System									
50109 Unik 5W	027 2700K 330lm CRI>90 030 3000K 360lm CRI>90	01 White 02 Black	<table border="1"> <tr><td>N</td><td>W</td><td>CASAMBI</td></tr> <tr><td></td><td>D</td><td>DALI</td></tr> <tr><td></td><td></td><td>ON/OFF</td></tr> </table>	N	W	CASAMBI		D	DALI			ON/OFF
N	W	CASAMBI										
	D	DALI										
		ON/OFF										

NESO TOP

no incl. 50.000HS L70/B10 MACADAM 3 24V 850°C




Family	Color T°	Beam Angle	Finish	Control System									
50106 Top 5W	927 2700K 330m CRI>90 930 3000K 360lm CRI>90	1 20° 2 40°	1 White 2 Black	<table border="1"> <tr><td>N</td><td>W</td><td>CASAMBI</td></tr> <tr><td></td><td>D</td><td>DALI</td></tr> <tr><td></td><td></td><td>ON/OFF</td></tr> </table>	N	W	CASAMBI		D	DALI			ON/OFF
N	W	CASAMBI											
	D	DALI											
		ON/OFF											

The Magnetic Track System

FOCUSON




TRACK RECESSED

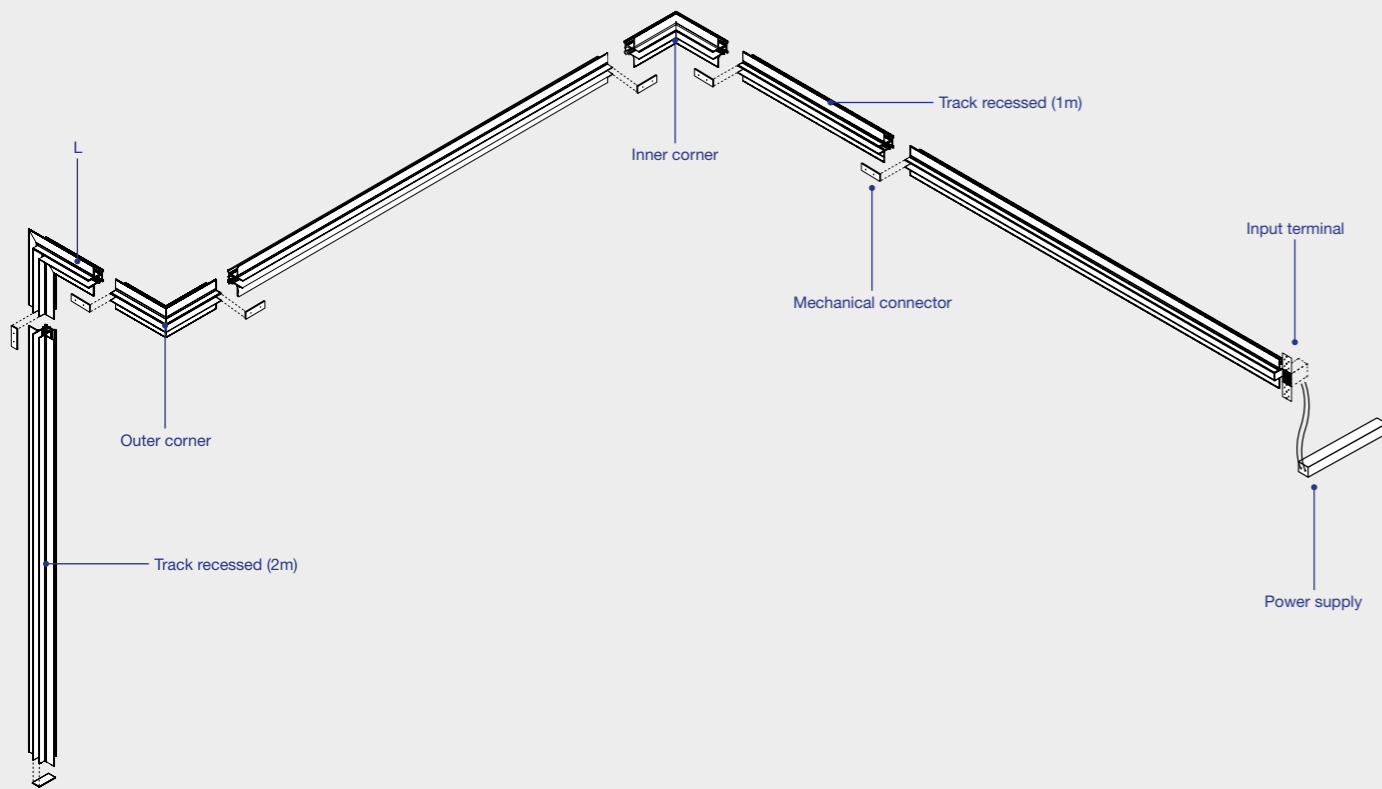

24V

Family	Track Length	Finish	Control System
5020120 Neso Track Recessed	10 1m	1 White	D DALI CASAMBI ON/OFF
	20 2m	2 Black	


TRACK SURFACE & SUSPENSION

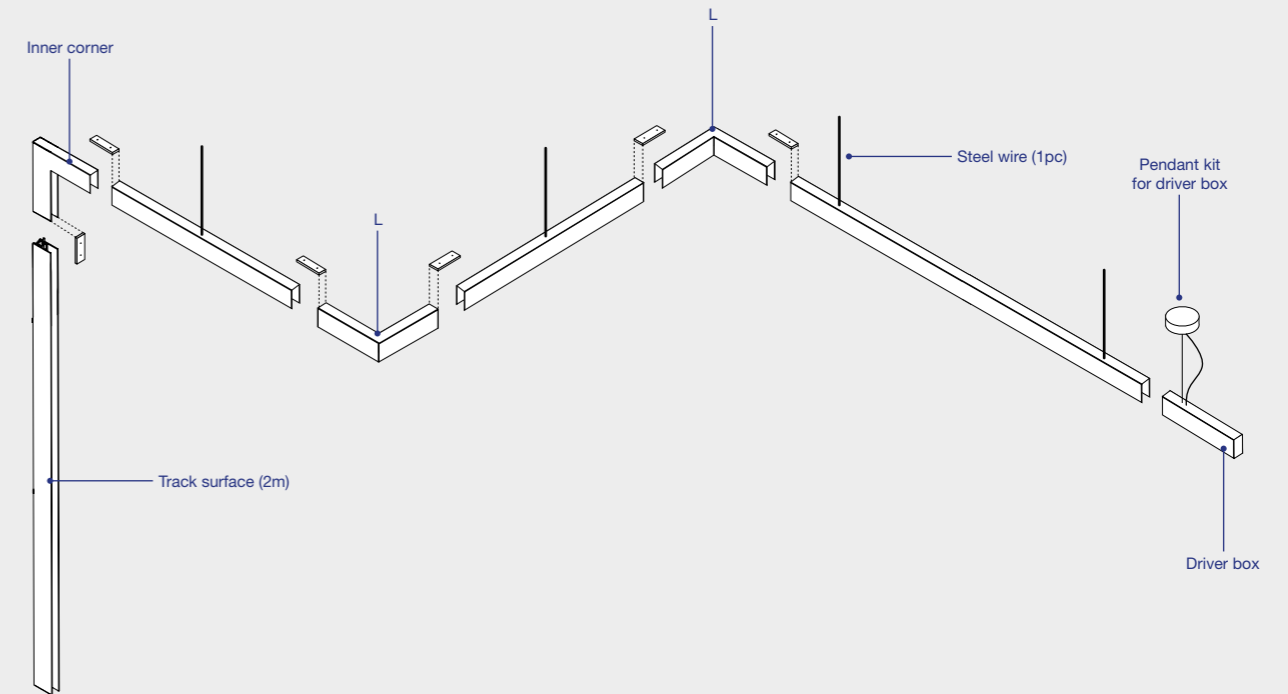

24V






Family	Track Length	Finish	Control System
5020110 Neso Track Surface	10 1m	1 White	D DALI CASAMBI ON/OFF
	20 2m	2 Black	

ACCESSORIES


	● 5020200102 Mechanical connector
---	-----------------------------------


POWER SUPPLY



98324120	Power supply 120W
98324150	Power supply 150W
98324180	Power supply 180W
98324200	Power supply 200W

	● 5020221401 / ● 5020221402 Input terminal
	● 5020221401D / ● 5020221402D Input terminal DALI
	● 5020221001 / ● 5020221002 L
	● 5020221001D / ● 5020221002D L DALI
	● 5020221101 / ● 5020221102 T
	● 5020221101D / ● 5020221102D T DALI
	● 5020221201 / ● 5020221202 Inner corner
	● 5020221201D / ● 5020221202D Inner corner DALI
	● 5020221301 / ● 5020221302 Outer corner
	● 5020221301D / ● 5020221302D Outer corner DALI

ACCESSORIES






	● 5020200102 Mechanical connector
---	-----------------------------------

	● 5020210001 / ● 5020210002 Driver box
	● 5020210001D / ● 5020210002D Driver box DALI

	● 5020210201 / ● 5020210202 Pendant kit driver box
	● 5020210201D / ● 5020210202D Pendant kit driver box DALI
	5020210102 Steel wire

POWER SUPPLY

98324120	Power supply 120W
98324150	Power supply 150W
98324180	Power supply 180W
98324200	Power supply 200W

	● 5020210301 / ● 5020210302 Input terminal
	● 5020210301D / ● 5020210302D Input terminal DALI
	● 5020211001 / ● 5020211002 L
	● 5020211001D / ● 5020211002D L DALI
	● 5020211101 / ● 5020211102 T
	● 5020211101D / ● 5020211102D T DALI
	● 5020211201 / ● 5020211202 Inner corner
	● 5020211201D / ● 5020211202D Inner corner DALI
	● 5020211301 / ● 5020211302 Outer corner
	● 5020211301D / ● 5020211302D Outer corner DALI

Logistic Headquarters

Calle Dinámica 1
Polígono Industrial Santa Rita
08755 Castellbisbal (Barcelona)
Tel +34 93 772 39 49
info@faro.es

Showrooms

BARCELONA
Princesa
Calle Princesa, 52
08003, Barcelona
Tel +34 93 238 73 73
info@faro.es

MADRID
docontract MAD
Calle Velázquez, 35, 4ºD
28001, Madrid
Tel +34 689 583 571
showroom@docontractmad.com

PARIS
7 Rue d'Uzès,
75002 Paris
Tel +34 687 845 758
hajar.chegri@faro.es