



WIRING DIAGRAM

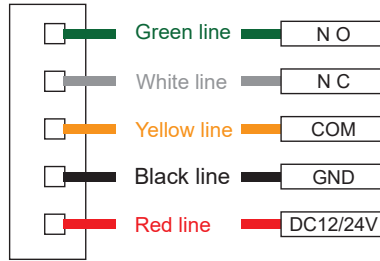

CONNECTION EXAMPLE

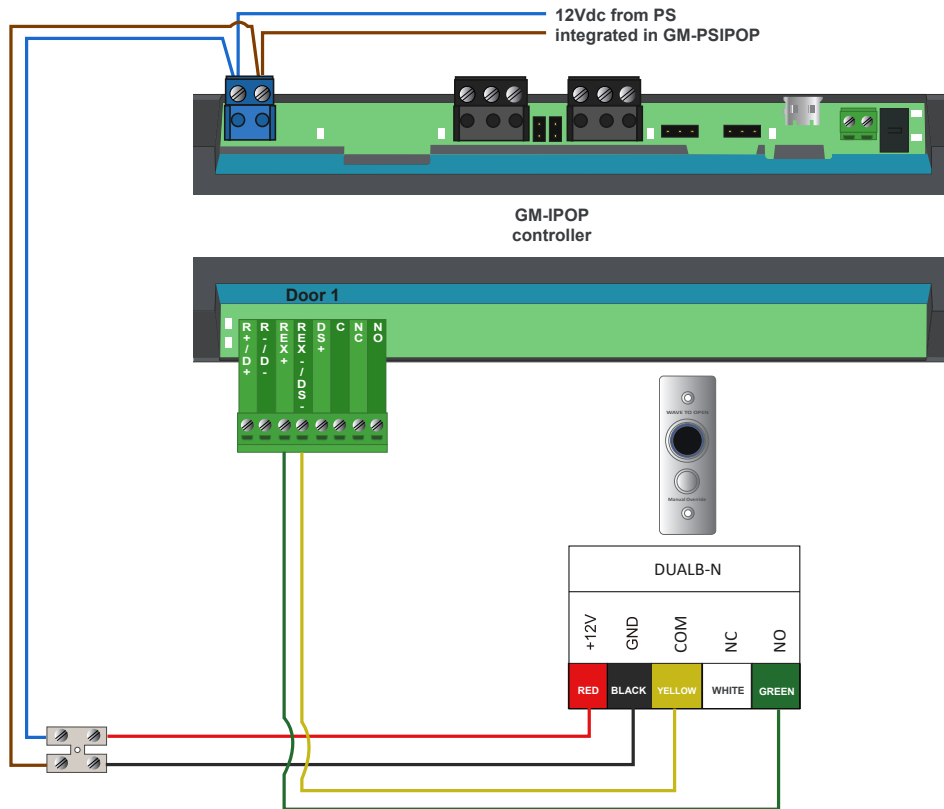

DETECTION DISTANCE RANGE ADJUSTMENT (D)

It is possible to adjust the activation distance range between 3cm and 20cm by changing the position of the potentiometer “D”:



Turn left (counterclockwise) to increase the activation range.

Turn to the right (clockwise) to decrease the activation range.

TIME DELAY SETTING (T)

It is possible to adjust the delay from 0 to 30 seconds by changing the position of the potentiometer “T” :



Turn left (counterclockwise) to reduce the delay.

Turn to the right (clockwise) to increase the delay.