


1. Description:


Power supply to replace FA-GB2/B Power supply of GB2 system.

Dimension: 87mm (W) 89mm (H) 58 mm (D)



PC7H

2. Wiring:

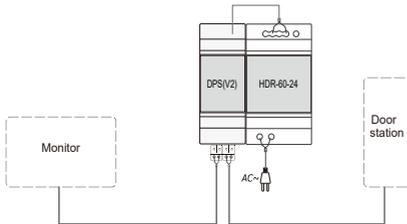

R-FA-GB2/C

L: AC input

N: AC input

BUS(IM): GB2 Bus Monitor

BUS(DS): GB2 Bus Door Station


FA-GB2/B

L: AC input

N: AC input

BUS(M): GB2 Bus Monitor

BUS(PL): GB2 Bus Door Station



3. Mounting:

This device must be always installed inside an electrical enclosure, on 35mm DIN Rail

4. Specification

Input Voltage:	100~240Vac
Input Frequency:	50~60Hz
Rated Output Voltage:	DC 28V
Rated Output Current:	2.5A
Working Temperature:	-10°C~50°C
SW Port Input Voltage:	Max.230Vac, 2.5A
Dimension:	88*98*59mm

5. Warning:

- The unit can only be used in GB2 system.
- Don't connect the unit with any non-specified power source. Fire or electric shock could result.
- Don't dismantle or alter the unit. Fire or electric shock could result.
- The unit must be installed and wired by a qualified technician.
- Keep the unit away from water or any other liquid. Fire or electric shock could result.

