



clever
BATHROOM & KITCHEN TAPS

REF: 61946

DESCRIPTION: Single-lever tall basin mixer with aerator and flexible hoses 3/8" >350mm.

SERIES: VELVET


RANGE: PLATINUM

EAN: 8425144264163

PRODUCT IMAGE:



TECHNICAL DRAWING:

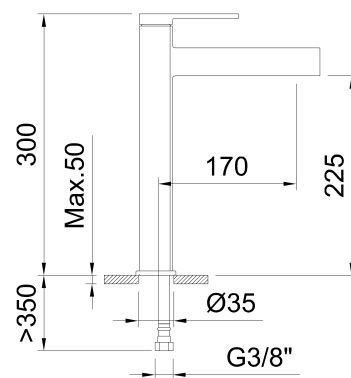

FINISH:



Brushed gunmetal PVD

PATENTED / WARRANTY:



CERTIFICATIONS:



SPARE PARTS:



61989
Handle



61994
Ceramic cartridge
26



98492
Aerator

TECHNOLOGIES:



Waterfall effect

This exploded view diagram illustrates the components of a kitchen faucet assembly. The parts are numbered as follows:

- 1:** Lever handle
- 2:** Top cap
- 3:** Top cap gasket
- 4:** Top cap nut
- 5:** Top cap O-ring
- 6:** Main faucet body
- 7:** Main faucet gasket
- 8:** Main faucet O-ring
- 9:** Main faucet flange
- 10:** Main faucet mounting plate
- 11:** Main faucet cartridge
- 12:** Main faucet mounting bracket
- 13:** Main faucet mounting screws
- 14:** Main faucet mounting pin
- 15:** Main faucet mounting sleeve
- 16:** Hot water indicator
- 17:** Hot water indicator pin
- 18:** Hot water indicator label
- 19:** Hot water indicator O-ring
- 20:** Hot water indicator pipes (3/8" and 3/8")

- This tap is designed exclusively for the supply of drinking water. Do not use it for any other liquids or substances that could compromise its safety or functionality.
- Always follow the installation, usage, and maintenance instructions provided by Standard Hidráulica, S.A.U.
- Before installation, ensure that the pipework is clean and free from debris that could affect the tap's performance.
- Use appropriate tools during installation to avoid damaging the tap. Do not over-tighten fittings, as this may cause mechanical failure and/or leaks.
- Adjust the hot water temperature to prevent burns. Be aware that the tap body may become hot during use, posing a risk of burns upon contact.
- Do not leave the tap running unattended to prevent overflows and unnecessary water wastage.
- Operate the tap only within the pressure and temperature limits specified by Standard Hidráulica, S.A.U. Using it outside these parameters may lead to damage or reduce the product's lifespan. If the mains water pressure is high, it is advisable to install a pressure-reducing valve to protect the tap from excessive strain.
- Before installing, handling, or dismantling the tap, close the shut-off valve and release any residual water pressure.
- Periodically inspect all connections and O-rings for leaks or signs of wear and replace components if necessary.
- For repairs, use only original spare parts recommended by Standard Hidráulica, S.A.U. to ensure compatibility and reliability.
- The tap contains small components. Keep them out of the reach of young children to eliminate choking hazards.
- Avoid using aggressive or abrasive cleaning agents, as these may damage the tap's surface finish or internal components.
- After installation, dispose of the packaging responsibly in accordance with local waste disposal regulations.
- At the end of the tap's service life, recycle or dispose of it in accordance with local regulations governing metal and plastic waste.