



VALVES

SIGHT BALL VALVE MINI

BOSTON



100% tightness

Reliability



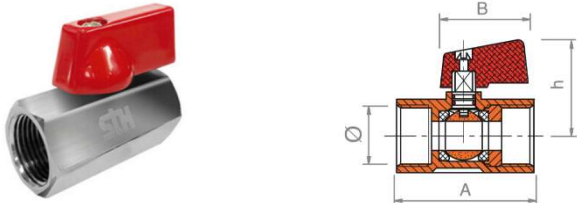
The ball valve Boston mini is designed and guaranteed for the use in installations of potable water, warm water, and compressed air networks. For fuels, solvents, acids, and aggressive liquids, consult us.

This range offers a maximum protection against corrosion due to the nickel-plating coating. The nickel coating enables the installation outdoors without impairing its performance.

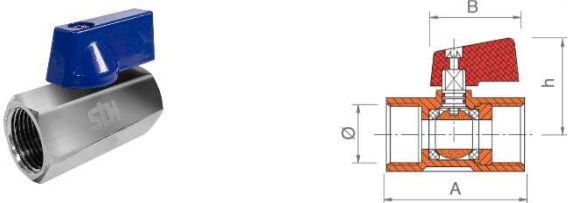
TECHNICAL DATA	
Maximum pressure	25 bar
Maximum temperature	90 °C
Range of temperature	-20 °C to 90 °C

MATERIALS	
Body and fitting	Brass (UNE-EN 12164 - 12165)
Ball	Brass (UNE-EN 12164 - 12165)
Stem and press	Brass (UNE-EN 12164 - 12165)
Sealing	PTFE
O ring	NBR
Handle	Aluminium
Body finish	Polished

MINI H-H Polished

				
Code	Ø	A	B	h
35520	1/4"	40,5	32,8	26,5
35221	3/8"	41,5	32,8	26,5
35522	1/2"	44,5	32,8	28,2

MINI H-H Polished

				
Code	Ø	A	B	h
35525	1/4"	40,5	32,8	26,5
35226	3/8"	41,5	32,8	26,5
35527	1/2"	44,5	32,8	28,2
35528	3/4"	52,5	32,8	31,2




VALVES


SIGHT BALL VALVE MINI

BOSTON

MINI M-H Polished

									
Code	Ø	A	B	h					
35530	1/4"	39,3	32,8	26,5					
35531	3/8"	40,5	32,8	26,2					
35532	1/2"	44,5	32,8	28,2					

MINI M-H Polished

									
Code	Ø	A	B	h					
35535	1/4"	39,3	32,8	26,5					
35536	3/8"	40,5	32,8	26,2					
35537	1/2"	44,5	32,8	28,2					
35538	3/4"	52,5	32,8	31,2					

RED HANDLE

	
Código	
35173	

BLUE HANDLE

	
Código	
35171	