

REBA 45 LITE


(SUSPENDED | SUSPENDU | ABGEHÄNGTE MONTAGE | SUSPENSO | SUSPENDIDO)

EN INSTALLATION INSTRUCTIONS**FR** NOTICE DE MONTAGE**DE** MONTAGEANLEITUNG**PT** INSTRUÇÕES DE MONTAGEM**ES** INSTRUCCIONES DE MONTAJE

EN READ THE SUPPLEMENTARY MANUALS.
FR LIRE LES NOTICES DE MONTAGE SUPPLÉMENTAIRES.
DE LESEN SIE DIE ZUSÄTZLICHEN MONTAGEANLEITUNGEN
PT CONSULTE OS MANUAIS COMPLEMENTARES.
ES LEA LOS MANUALES COMPLEMENTARIOS.




IIV881
IIV886

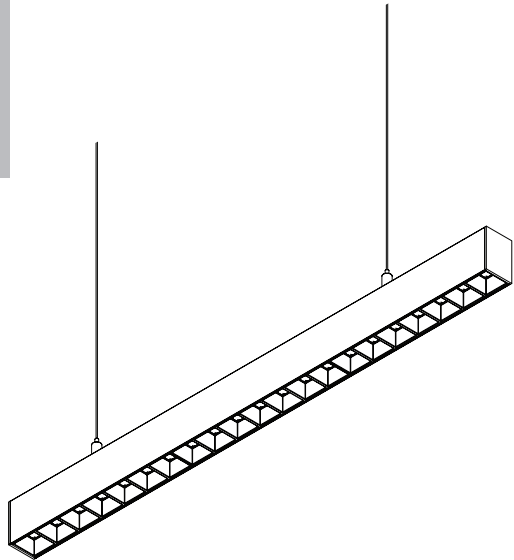

Order code / Code com. / Bestell-Nr. / Código / Código: 90974L...| 90975L...|

**IP 40**bOPTICS
650°C**230V/50Hz****EN** Carefully read the installation instructions provided before installing the device. Safety and Maintenance: Scan here. |**FR** Lire attentivement les notices de montage avant l'installation de l'appareil. Sécurité et Entretien: Sancez ici. |**DE** Bitte lesen die mitgelieferte Montageanleitung vor de Montage des Geräts. Sicherheit und Wartung: Hier scannen. |**PT** Leia atentamente as instruções de montagem fornecidas antes de instalar o aparelho. Segurança e Manutenção: Scan aqui. |**ES** Lea atentamente las instrucciones de montaje proporcionadas antes de instalar el aparato. Seguridad y Mantenimiento: Escanea aqui. |

REBA 45 LITE




REBA 45 LITE



(mm)
562x45x66
1122x45x66
1402x45x66
1682x45x66
2804x45x66

TOOLS | OUTILS | WERKZEUG | FERRAMENTAS | HERRAMIENTAS

Umbrako
Phillips screwdriver
Level ruler




EN USE GLOVES.
FR UTILISEZ DES GANTS.
DE HANDSCHUHE BENUTZEN.
PT UTILIZE LUVAS.
ES USE GUANTES.

REBA 45LITE





90974L... | 90975L... |

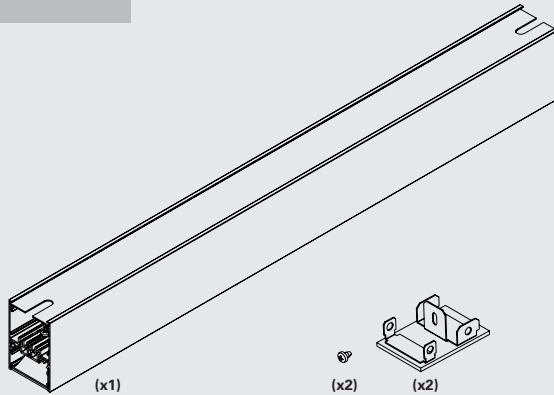

S16 REBA 45 LITE SUSPENSION KIT KIT DE SUSPENSION S16 REBA 45 LITE S16 REBA 45 LITE SEILABHÄNGUNG KIT DE SUSPENSÃO S16 REBA 45 LITE KIT DE SUSPENSÓN S16 REBA 45 LITE

+ 
IIV886

913400 | 913401 | 913402



T64 CEILING ROSE KIT
KIT PATÈRE DE SUSPENSION T64
T64 DECKENDOSE KIT
KIT DE ALIMENTAÇÃO T64
KIT BASE DETECHO T64

+ 
IIV881

94300...

CEILING ROSET T64
 PATÈRE DE SUSPENSION T64
 DECKENDOSE T64
 CAIXA DE ALIMENTAÇÃO T64
 BASE DE TECHO T64



(x7)





(x1)



(x1)


REBA 45 LITE

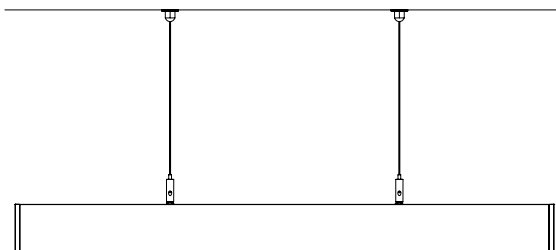


(TOP VIEW)

REBA 45 LITE			
L (mm)	A	B	C
562		417	
1122		917	
1402	72,5	1257	22,5
1682		1537	
2804		2659	

A - Recommended distance
 - Distance recommandée
 - Empfohlener Abstand
 - Distância recomendada
 - Distancia recomendada

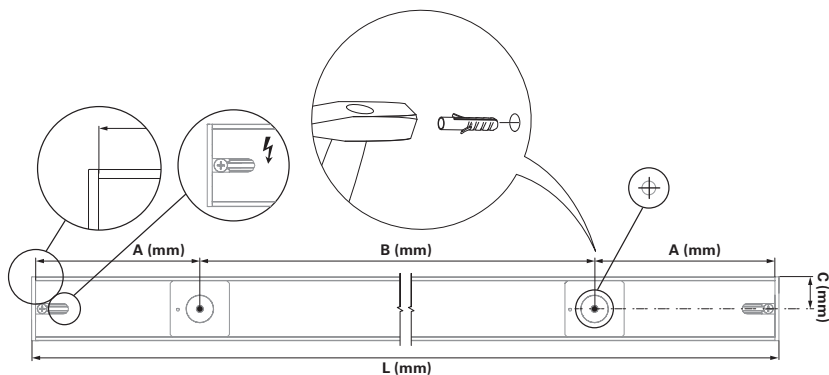

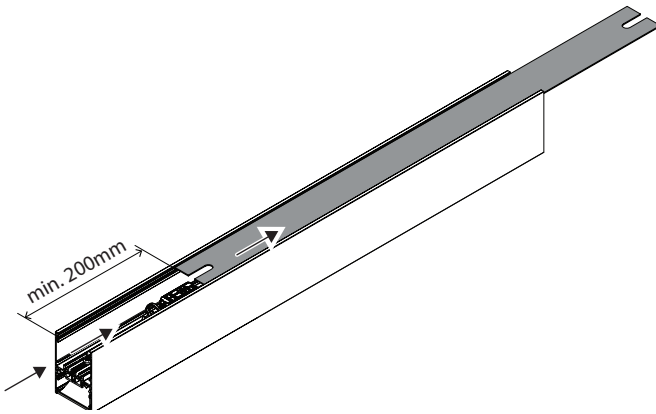1

FOR SUSPENSION AND CEILING ROSE READ:
 POUR SUSPENSION LIRE ET PATÈRE DE
 SUSPENSION LIRE :
 FÜR SEILABHÄNGUNG UND DECKENDOSE, BITTE
 LESEN SIE:
 PARA SUSPENSÃO E CAIXA DE
 ALIMENTAÇÃO LER:
 PARA SUSPENSIÓN Y BASE DE TECHO LEER:




IIV881 (FIRST /
 PREMIER / ERSTE
 / PRIMEIRO /
 PRIMERO)


IIV886

2




1.

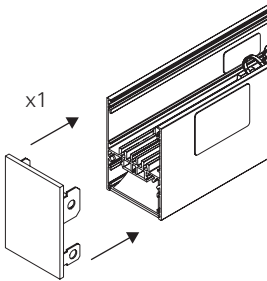


2.

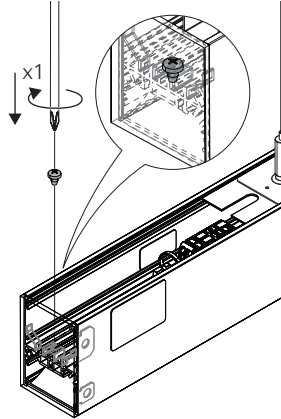


3.

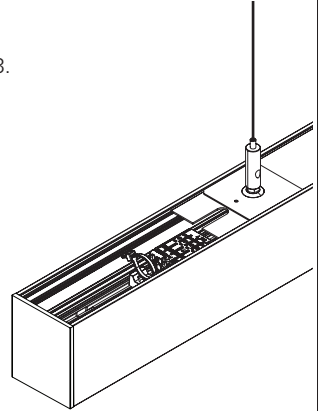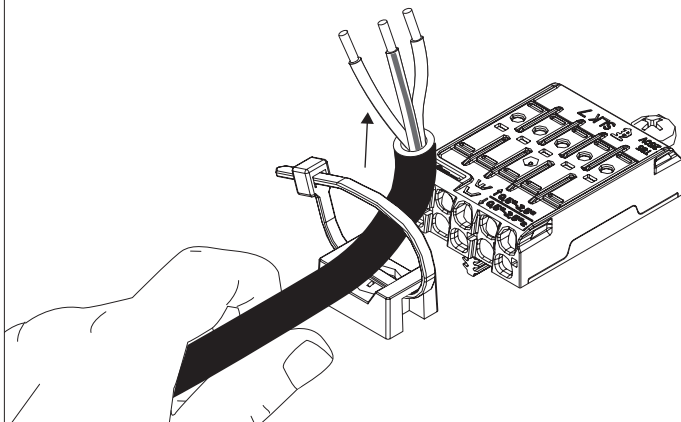**3**


4 - HF

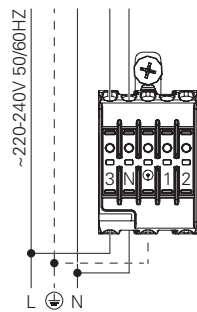


DALI

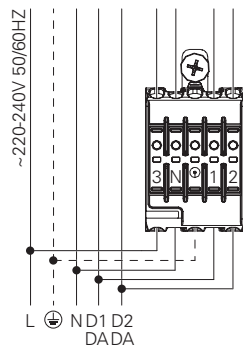


SWD

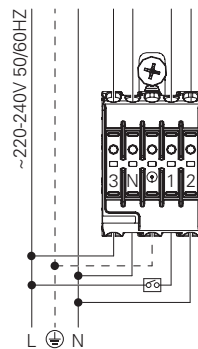

5

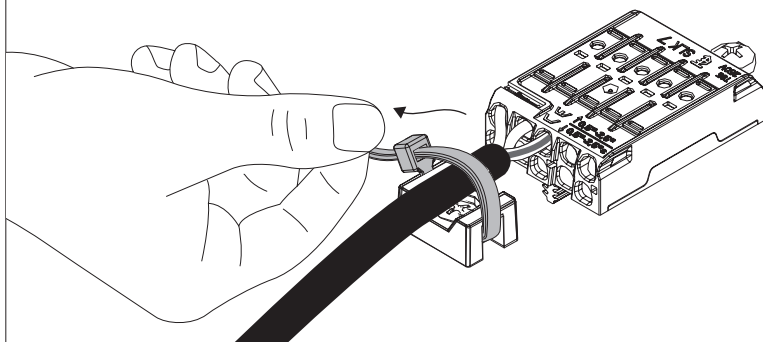


6

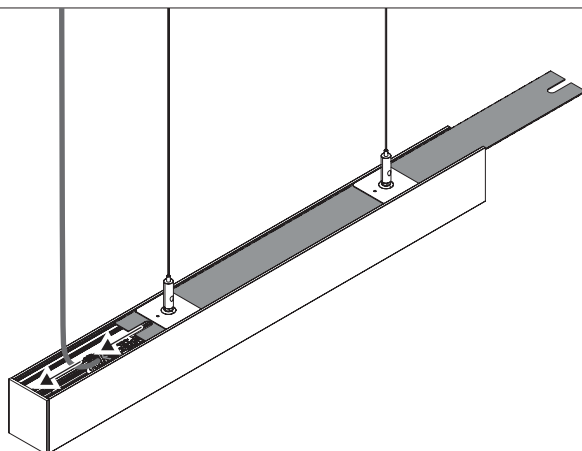


7

1.



2.

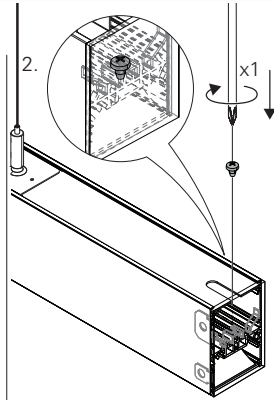

3.

