


REBA 45 LITE Line

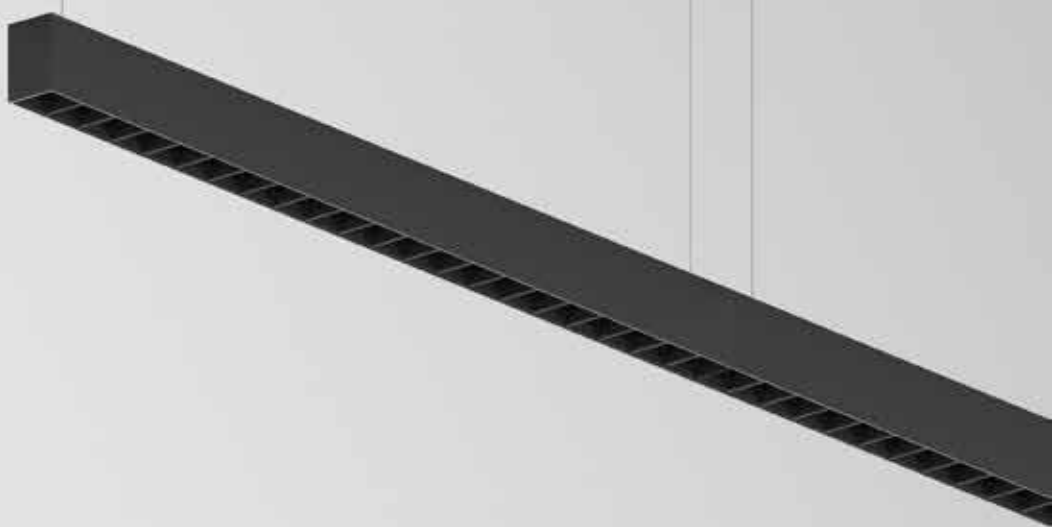

Product characteristics

Body

Extruded aluminium profile

Finish

Epoxy polyester powder coated

Optical system

bOPTICS - Symmetric reflector

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L80, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz



IP 40

650°C

01. Select version



REBA 45 LITE Line

66

45

L

90°

70°

60°

30°

30°

60°

90°

140

210

350

CO-C180

CO-C270

W	lm output	lm/W	Lmm	CODE*
14	1910	136	566	90976L006♥♣0♦00
27	3819	141	1126	90976L012♥♣0♦00
34	4774	140	1406	90976L015♥♣0♦00
40	5729	143	1686	90976L017♥♣0♦00
68	9548	140	2806	90976L030♥♣0♦00

REBA 45 LITE Line

- To complete the product line, it is necessary to order the start kit, the suspension, and the power supply kit separately.
- Dimensions do not include start kit. To complete the line add 6 mm to the length.
- The maximum line length with 1 single feed/power point is 30000 mm.

*Replace the symbols to complete the code

Control gear

▼

HF

DALI

E

H

Colour

♣

White

Black

W

B

Colour temp.

♦

3000K

4000K

3

0

02. Select options

OPTIONS		Code*
Start kit - end cap start/end		
• 2 end caps included.		
Suspension		
S16 L1500 mm (x2)		913400
S16 L3000 mm (x2)		913401
S16 L6000 mm (x2)		913402
Power supply kit		
L1500mm - 3 x 1,5 mm ²	35 l  Ø85	943006
L1500mm - 5 x 1,5 mm ²		943009
L3000mm - 3 x 1,5 mm ²		943007
L3000mm - 5 x 1,5 mm ²		943010
L6000mm - 3 x 1,5 mm ²		943008
L6000mm - 5 x 1,5 mm ²		943011
• Ceiling rose and current supply cable included.		



*Replace the symbols to complete the code

Colour	
☐ White	W
☒ Black	B



Product details



Suspension



Start kit



Ceiling rose

