

REBA 50 HEXA



Product characteristics

Body

Extruded aluminium profile

Finish

Powder coated

Optical system

bGLARE - Microprismatic diffuser

bLINE - Opal diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L90, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz

IP 40

bGLARE
850°C


bLINE
960°C

01. Select Outer Profile



OUTER PROFILE

Start / End (SRT/END)




Lmm	CODE*
567	90860L0020♦0083
847	90860L0030♦0083
1127	90860L0040♦0083

*Replace the symbols to complete the code

Colour	
□ White	W
■ Grey	G
■ Black	B

Middle (MID)



Lmm	CODE*
562	90860L0020♦0000
842	90860L0030♦0000
1122	90860L0040♦0000


OUTER PROFILE

- To complete the product it is necessary to order the inner profile, suspension kit, current supply cable and ceiling rose. Please order separately.
- To complete the line it is necessary to order the body connector kit and the start kit. Please order separately.
- Dimensions do not include start kit. To complete the line add 6 mm to the length.
- Maximum line length with 1 single feeding point under request.


02. Select Inner and Outer Profile



INNER PROFILE | SYMMETRIC



bGLARE - Microprismatic diffuser




W	lm output	lm/W	Lmm	CODE*
15	1603	107	562	90816L002♥W0♦00
22	2405	109	842	90816L003♥W0♦00
30	3207	107	1122	90816L004♥W0♦00


*Replace the symbols to complete the code

Control gear	♥
HF	E
DALI	H

Colour temp.	♦
3000K	3
4000K	0



bLINE - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
15	1655	110	562	90814L002♥W0♦00
22	2483	113	842	90814L003♥W0♦00
30	3310	110	1122	90814L004♥W0♦00

03. Select options

OPTIONS	Code*
Start kit - end cap start/end (x1) 	923101▲
Body connector kit	
2 ways HF	932148▲
2 ways DALI	932149▲
3 ways HF	932150▲
3 ways DALI	932151▲
• Through-wiring included.	
Suspension	
S5 L1500 mm (x1)	910408
S5 L1500 mm (x2)	910409
S5 L3000 mm (x1)	910419
S5 L3000 mm (x2)	910412
S5 L6000 mm (x1)	910420
S5 L6000 mm (x2)	910421
Transparent current supply cable	
3 x 1,5 mm ²	94030▲
5 x 1,5 mm ²	94000▲
Square ceiling rose¹	
Surface mounted T25 	978610▲
Recessed T7 	971400▲
Round ceiling rose¹	
Surface mounted T64 	979000▲
Recessed T5 	971300▲
Low Output version	
• Under request.	
Bespoke projects	
• Under request.	




*Replace the symbols to complete the code

Length	▲
L1500 mm	0
L3000 mm	1
L6000 mm	2

Colour ¹	▲
☐ White	W
☐ Grey	G
☐ Black	B



Product details

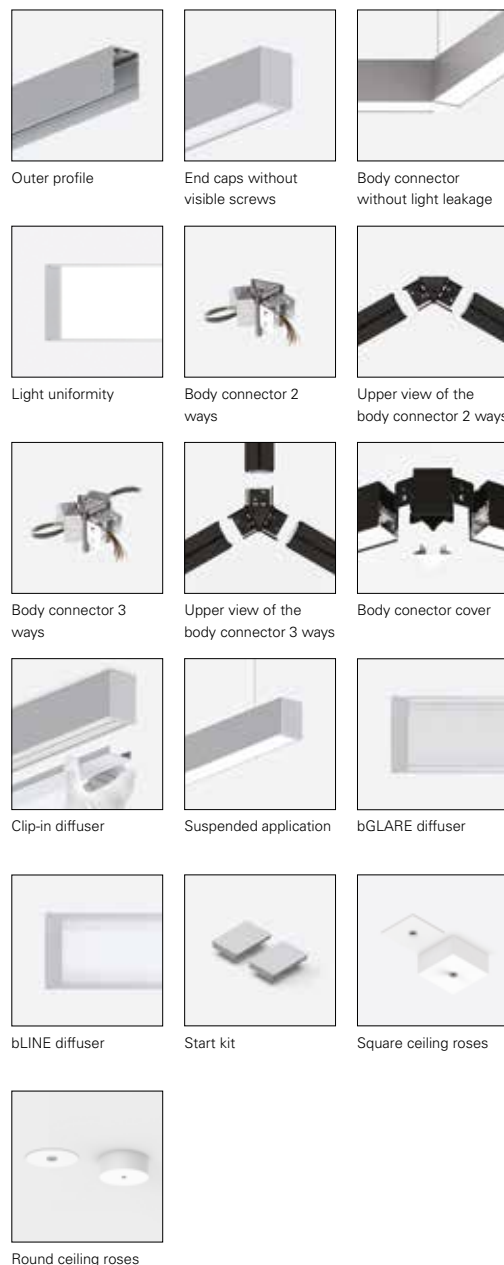

¹The ceiling roses are available only in White or Black colour.

