





Architectural
lighting

AURA

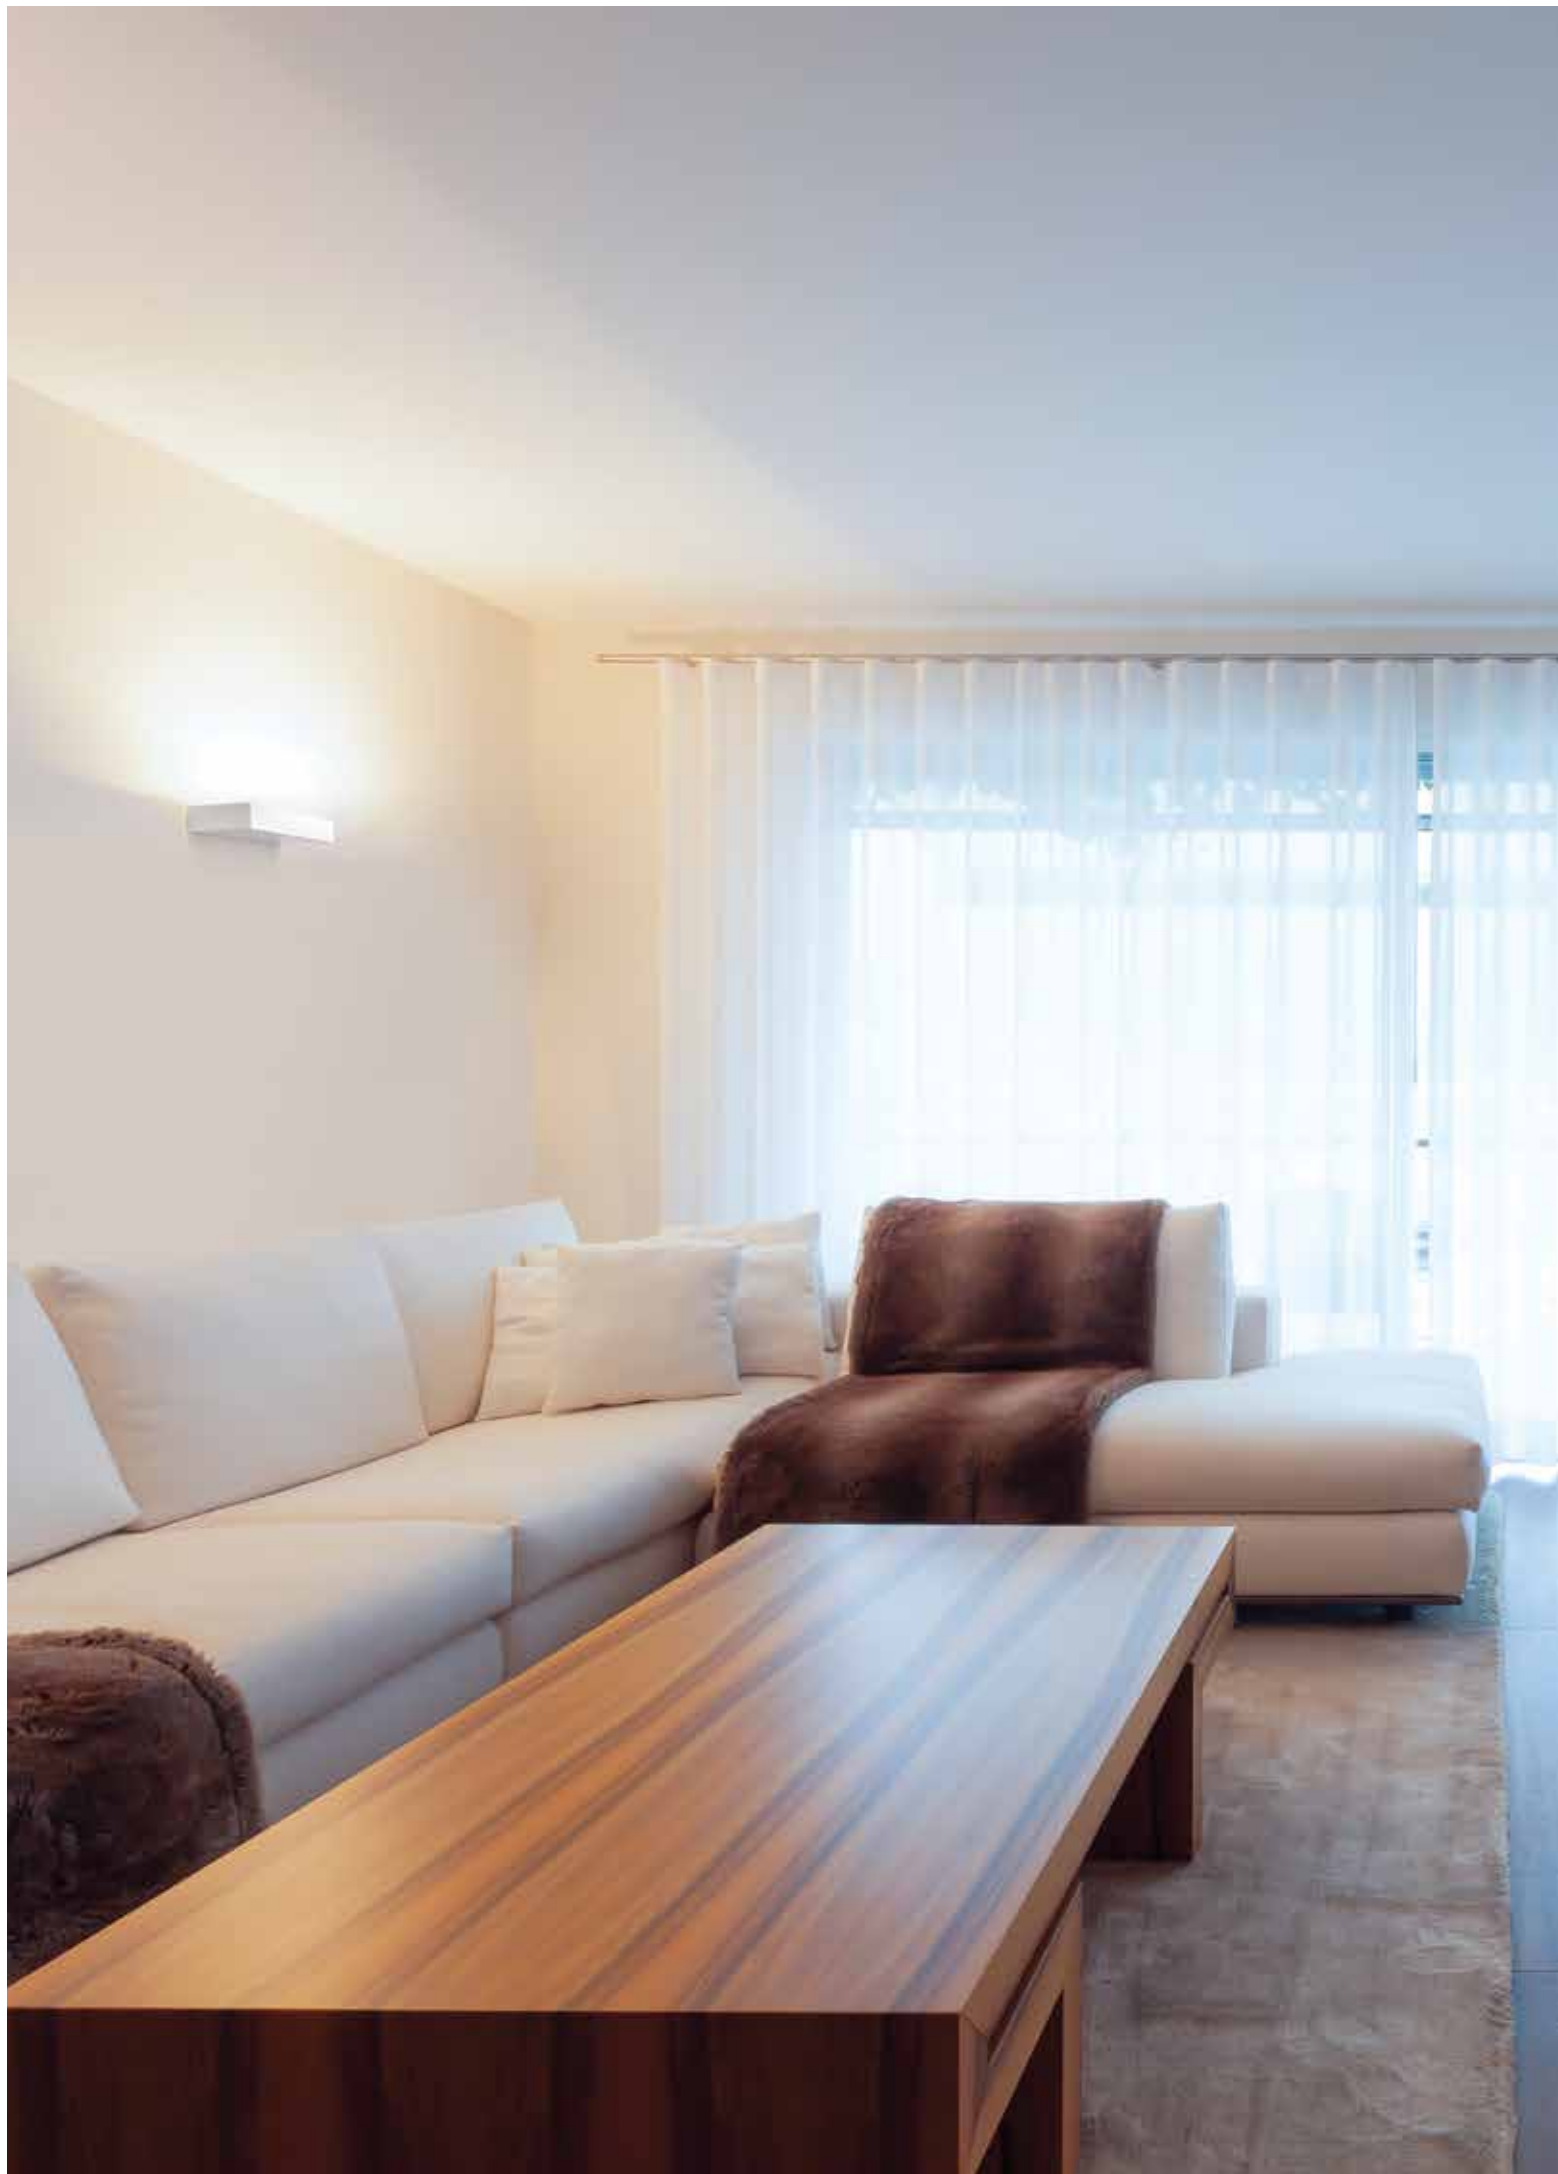

AURA
452



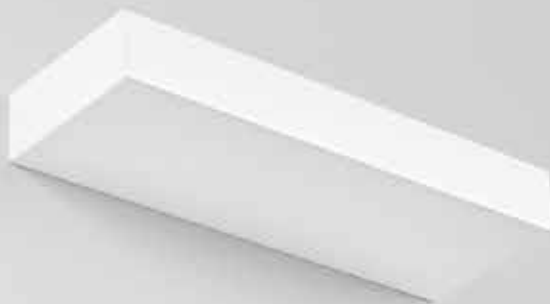

Product
characteristics


Body Steel sheet	
Finish Powder coated	
Optical system LIGHT+ - Opal diffuser	
Light source LED, RG1, CRI>80, MacAdam Step ≤3	
LED lifetime 80.000h @ L80, B10, Ta 25°C	
Control gear LED driver 220-240V-50/60Hz included	

230V/50Hz	
	IP 40
650°C	


01. Select version



AURA



LIGHT+ - Opal diffuser



W	lm output	lm/W	Lmm	CODE*
16	2017	126	300	90825L030▼▲0◆00
31	4034	130	600	90825L060▼▲0◆00

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Colour ¹	▲
□ White	W
■ Black	B

Colour temp.	◆
3000K	3
4000K	0



Product details



Diffuser

¹ Other colours available upon request.