




**Battens and
track systems**

AVL

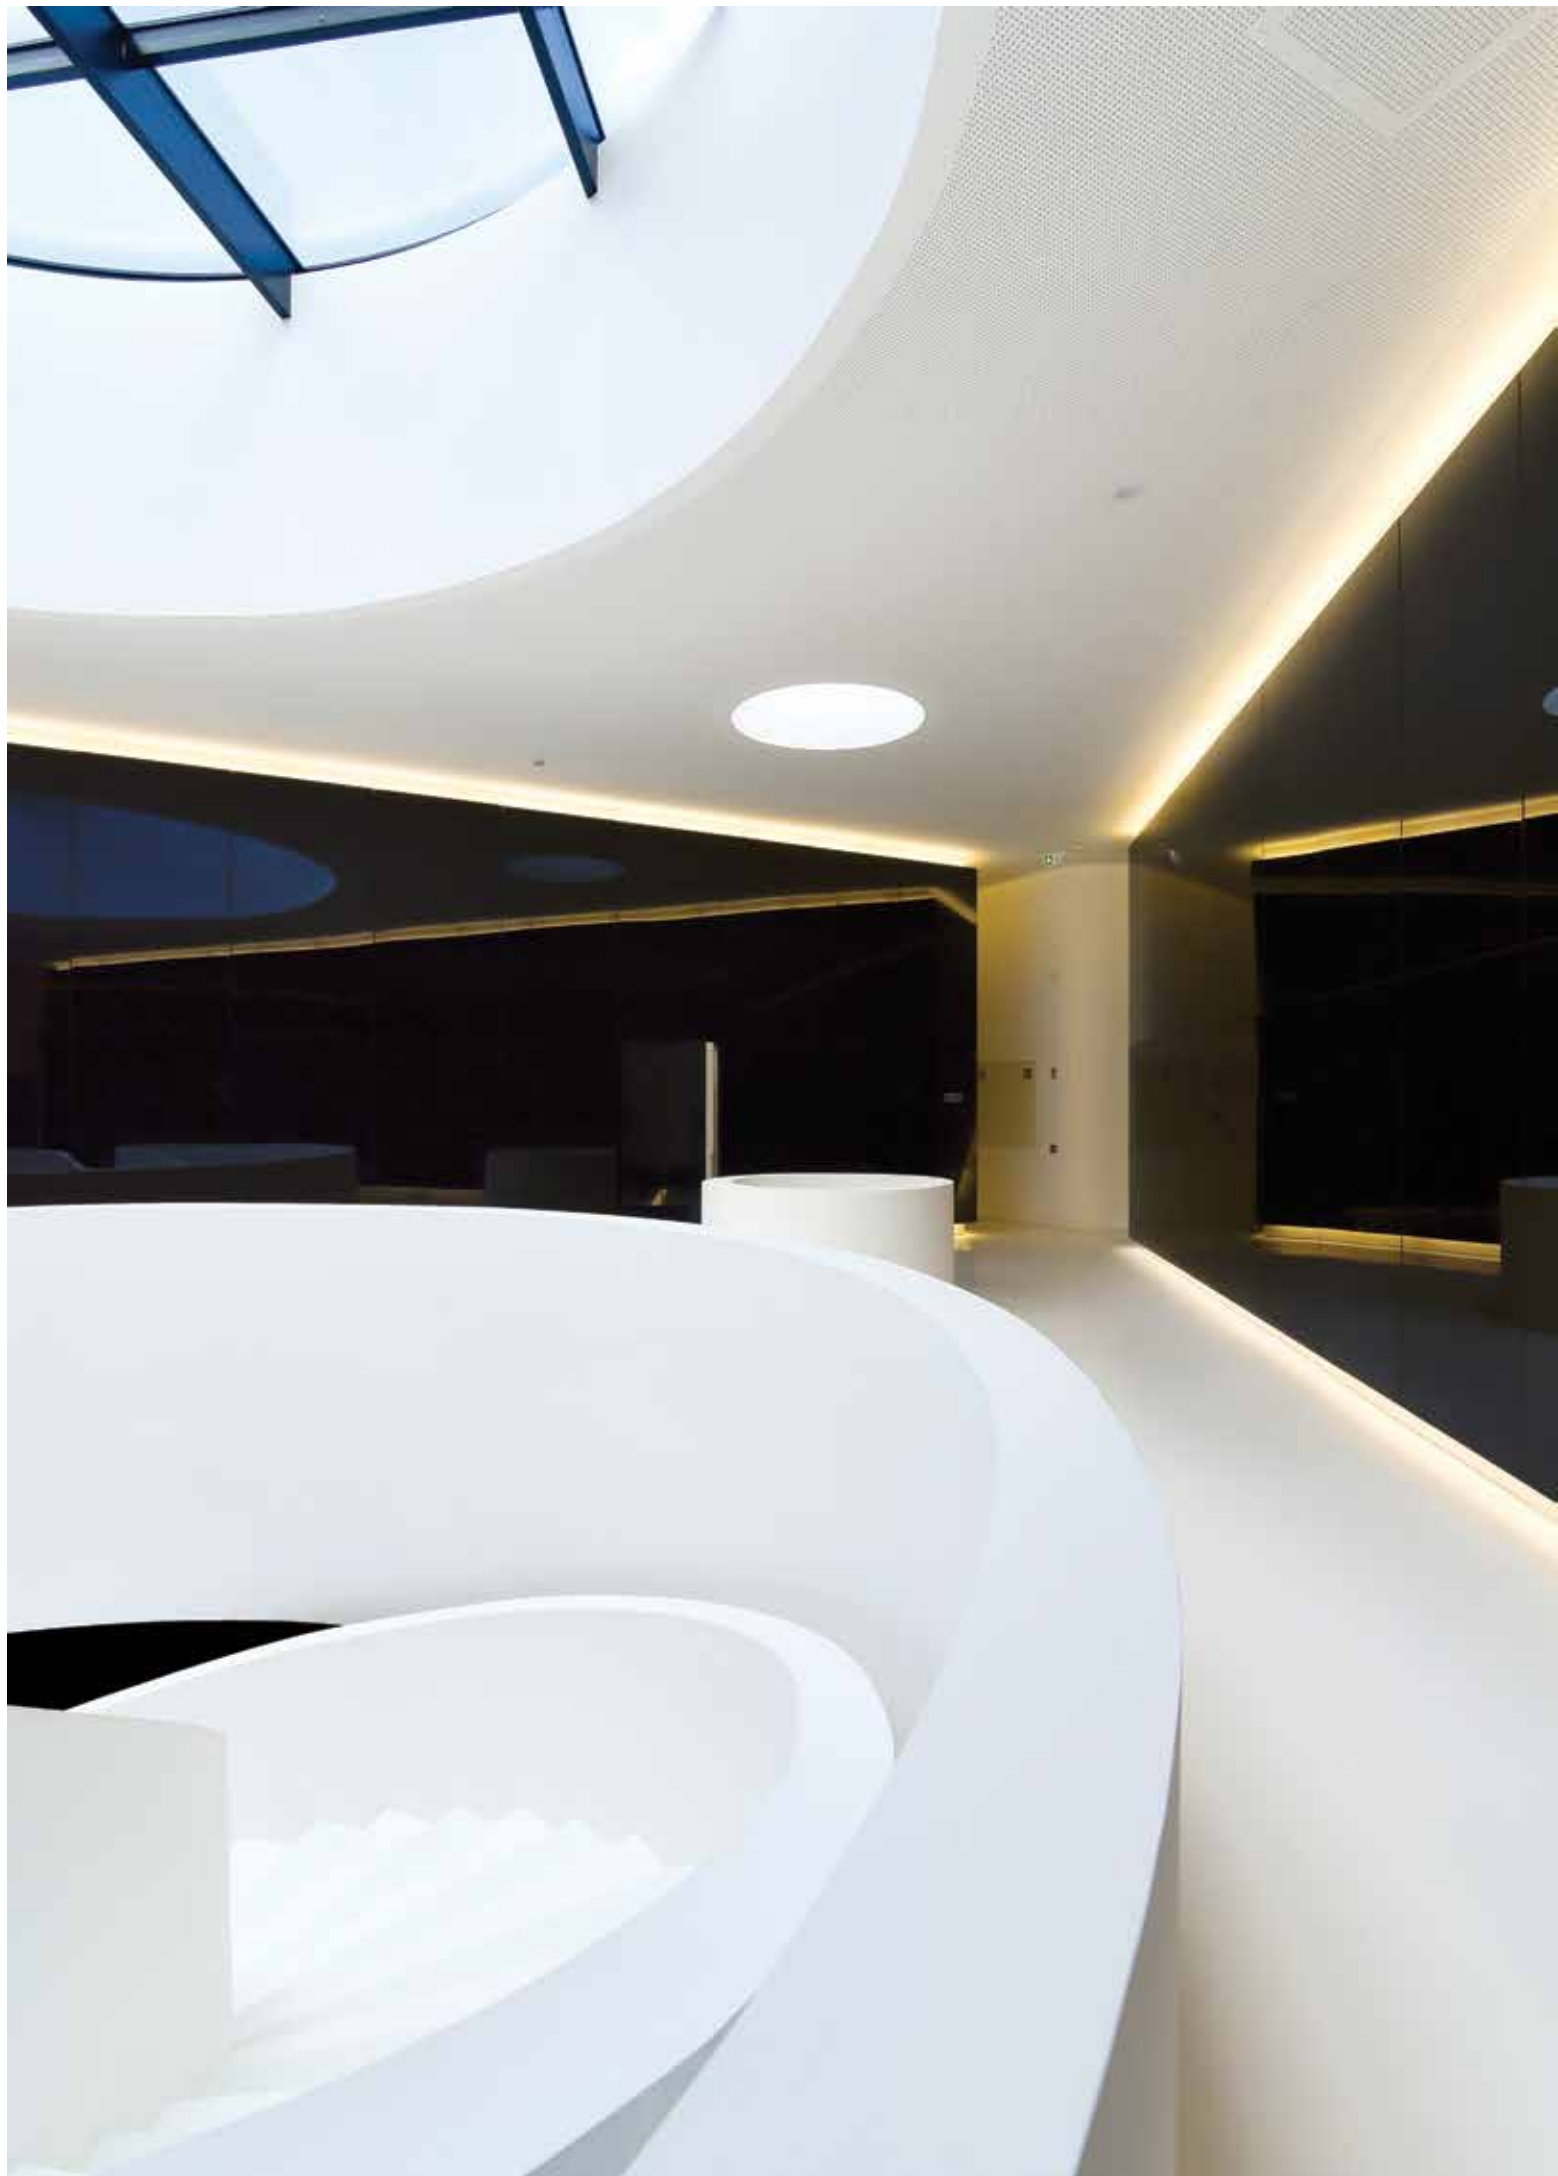

AVL
794





**Product
characteristics**

Body

Steel sheet

Finish

White matte powder coated

Optical system

DPT - Transparent diffuser

Light source

LED, RG1, CRI>80, MacAdam Step ≤3

LED lifetime

80.000h @ L80, B10, Ta 25°C

Control gear

LED driver 220-240V-50/60Hz included



230V/50Hz




IP 20

650°C


01. Select version



AVL

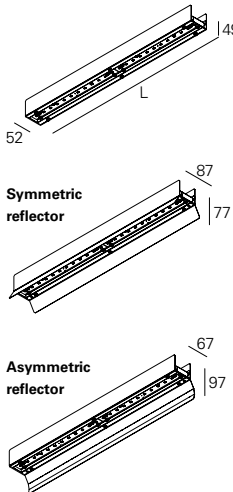

DPT - Transparent diffuser



W	lm output	lm/W	Lmm	CODE*
13	1786	137	561	90826L060▼VV0◆00
18	2678	149	841	90826L090▼VV0◆00
24	3571	149	1121	90826L120▼VV◆◆00
29	4464	154	1401	90826L150▼VV◆◆00

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Emergency	●
No EM	0
EM 3h (K3) ¹	3


Colour temp.	◆
3000K	3
4000K	0

02. Select options



Product details

OPTIONS	Code
Symmetric reflector	
L561 mm	980600
L841 mm	980601
L1121 mm	980602
L1401 mm	980603
Asymmetric reflector	
L561 mm	980500
L841 mm	980501
L1121 mm	980502
L1401 mm	980503
Through-wiring	
3 x 1,5 mm ²	945650
5 x 1,5 mm ²	945750
7 x 1,5 mm ²	946050
9 x 1,5 mm ²	948650
Surface mounting kit	926100
• Fixation for M4x8 DIN7985 screws.	

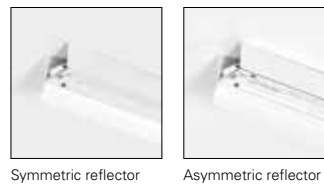

Symmetric reflector

Asymmetric reflector



Surface mounting kit

¹ Prepared for emergency remote control.