



Technical
lighting


CLOUD



CLOUD
634



CLOUD

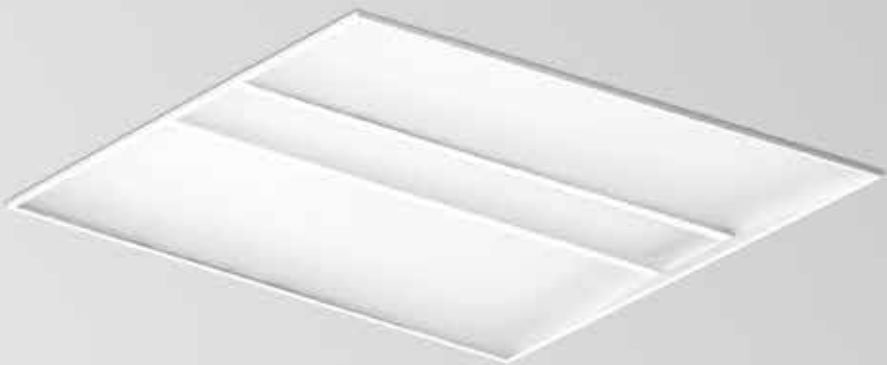

Product
characteristics


Body
Steel sheet
Finish
White matte powder coated
Fixing system
Pull-up recessed version with brackets
Optical system
DAM - Microprismatic diffuser
Light source
LED, RG1, CRI>80, MacAdam Step ≤3
LED lifetime
80.000h @ L90, B10, Ta 25°C
Control gear
LED driver 220-240V-50/60Hz included
Ceiling thickness
For ceilings between 1-25 mm

CE	RoHS
230V/50Hz	
⏏	IP 20
650°C	⚡


01. Select version



CLOUD



DAM - Microprismatic diffuser



UGR	W	lm output	lm/W	Size	CODE*
≤19	41	4370	107	582x582	90840L060▼W●●●
≤22	47	5376	114	582x582	90839L060▼W●●●

*Replace the symbols to complete the code

Control gear	▼
HF	E
DALI	H

Emergency	●
No EM	0
EM 3h (K3) ¹	3

Colour temp.	◆
3000K	3
4000K	0

Connector	♣
No connector	00
W3M ²	W3
W5MD ³	W5

02. Select options

OPTIONS	Code
Steel safety cable L1500 mm	955000
Air handling • Under request.	
Bespoke projects • Under request.	




Product details




DALI connector




Air handling




Lay-in recessed version for ceilings (15-24 mm)



Pull-up recessed version for ceilings (15-24 mm)



Pull-up recessed version (plasterboard ceilings)



Pull-up recessed version SAS 150 ceilings

¹ Prepared for emergency remote control.
² 3-pole Wieland GST18i3 male connector.
³ 5-pole Wieland GST18i5 DIM male connector.